




AIMS-compliant openGear IP Gateway that adapts to your changing needs.

Raptor EDGE | AIMS-compliant Modular IP Gateway

Raptor EDGE meets all SDI/IP conversion needs at the edges of your production core. This openGear appliance's high-density I/O and benchmark IP interoperability ensure a lasting investment designed to meet evolving standards and control requirements.

KEY BENEFITS

- > **Open control brings freedom of choice:** seamless integration into your chosen control system via NMOS, EmBER+/RAVENNA, published JSON API and Ross Video's DashBoard ecosystem.
- > **Proven interoperability:** AIMS-compliant transport and timing technology has been adopted by multiple vendors featuring IP Powered by COVELOZ.
- > **High-density:** up to 60 video streams and 960 audio streams of signal conversion in the compact, 2RU openGear chassis.
- > **Modularity:** 1 to 5 modules may be mounted into an openGear frame offering economical increments of 12 video streams.
- > **Future-Proof:** software defined signal processing functions may be acquired via future license upgrades.

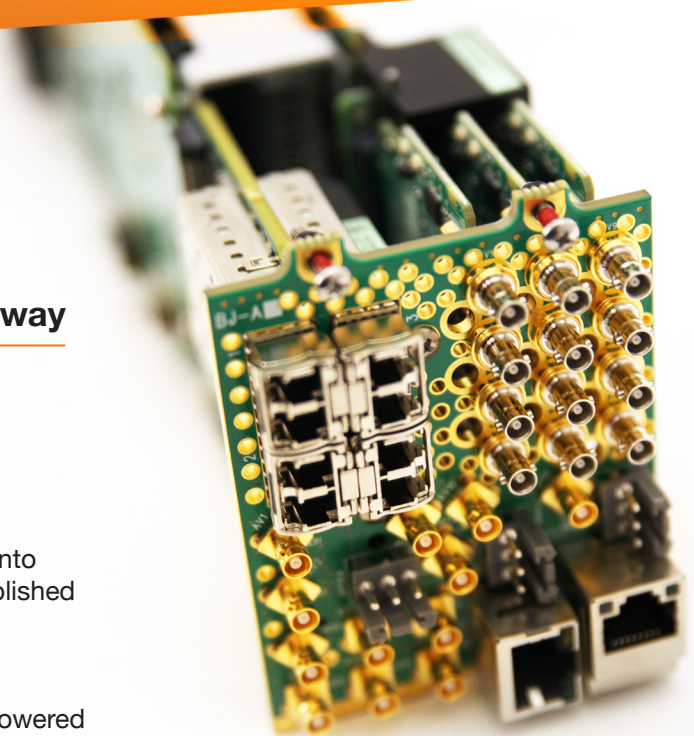



Raptor EDGE | Specifications

VIDEO FORMAT SUPPORT

- 720p 50 / 59.94 / 60
- 1080i 50 / 59.94 / 60
- 1080p 50 / 59.94 / 60
- 2160p 50 / 59.94 upgradable

IP TRANSPORT STANDARD SUPPORT

- SMPTE ST 2110 suite, including:
 - 10, System Timing and Definitions
 - 20, Uncompressed Active Video
 - 30, PCM Digital Audio
 - 31, AES3 Transparent Transport
 - 40, SMPTE Ancillary Data
- VSF TR-04
- AES67

AUDIO / VIDEO STREAM PROCESSORS

- 12 simultaneous stream processors per RAPTOR-EDGE module
- 6 IP ► SDI streams
- 6 SDI ► IP streams
- Up to 1080p60 supported
- Audio embedding & de-embedding, 16 channels per SDI interface
- 24-bit LPCM @ 48kHz audio support
- Dolby® pass-through (ST 2022-6 mode and ST 2110-31)

SYSTEM TIMING AND REFERENCE

- PTP Slave or Master (SMPTE 2059, AES67 and IEEE-1588 default profiles)
- Black burst / tri-level output and input for bridging PTP to / from analog black

CONTROL AND SETUP


- NMOS IS-04 and IS-05 for AIMS-compliant discovery, registration and connection control
- EmBER+/RAVENNA discovery, registration and connection control from popular 3rd-party control systems
- Provisioning and monitoring via Dashboard and/or our published JSON API

PHYSICAL SPECIFICATIONS

- 4-slot openGear card
- Power consumption: 60W
- Operating temperature 0-40oC

I/O CONNECTIVITY

- 4 x 10GbE SFP+ (2 primary, 2 redundant)
- 6 x HD-BNC input (12G/3G/HD/SD SDI)
- 6 x HD-BNC output (12G/3G/HD/SD SDI)
- 1 x RJ-45 for GbE control interface
- 1 x Internal GbE control interface (OG3 Frame)
- 6 x GPI IO (WECO pluggable terminal block)
- 1 x input sync reference (Blackburst / tri-level)
- 1 x output sync reference (Blackburst / tri-level)

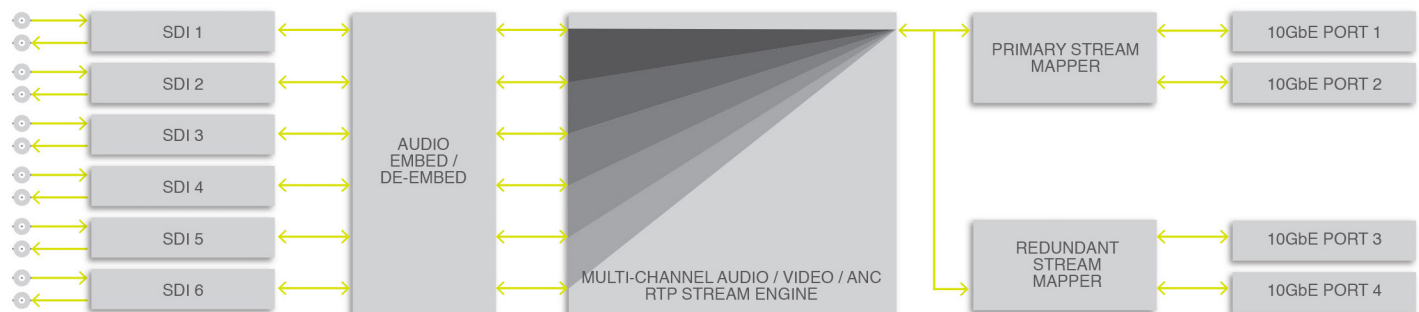

Signal Flow