


# FSR-6601-H 3G HD SD

## Single High Sensitivity Optical to Electrical Converter


Single channel High Sensitivity SDI optical to electrical converter supporting data rates from 143Mb/s to 2.97Gb/s

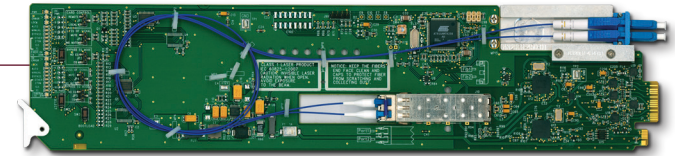

High sensitivity optical receivers provide an additional 10dB to your link budget over the standard optical receivers.

The FSR-6601-H is a single high sensitivity fiber optic receiver to serial digital SDI converter that supports serial digital data rates from 143Mb/s up to 2.97Gb/s (1080p). SDI outputs are reclocked providing excellent jitter and return loss specifications. The FSR-6601-H is fully hot-swappable with all active components on the front removable module. No active components are installed on the rear I/O connection module. This design greatly reduces down-time eliminating any need to access the back of the rack frame.

The -R2S high density split rear module can accommodate up to 2x FSR-6601-H cards, maximizing the number of conversion channels in a frame. In this configuration, the OG3-FR supports up to 20 independent channel solutions.

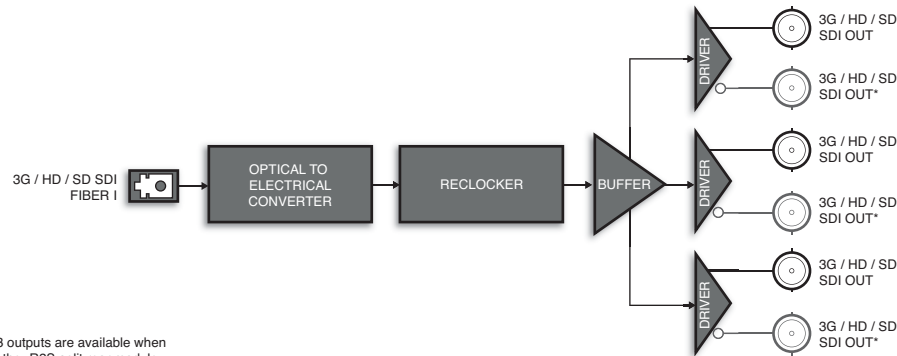

\* Only 3 outputs are available when using the -R2S split rear module.


### Ordering Information

#### Single High Sensitivity Optical to Electrical Converter

FSR-6601-H Single Optical Receiver

#### Rear Module Suffix (ex: [model]-R2)

-R2 Rear Module for FSR-6601-H  
 -R2S Split Rear Module for 2x FSR-6601-H

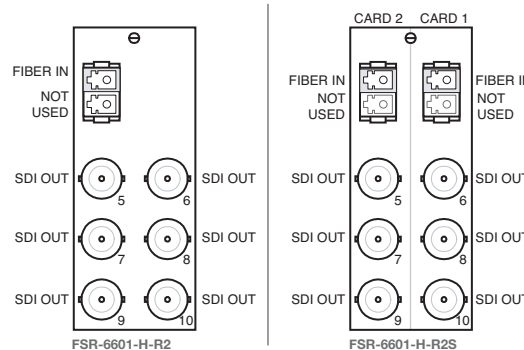

### Key Features

- Optical to Electrical for all SMPTE 424M, SMPTE 259M-C, and SMPTE 292M standards
- Future-proofed 3Gb/s (1080p) design
- Supports single-mode fiber
- Hot-swappable from front of frame with no external connect / reconnect required
- Optical input range 1270nm to 1610nm
- Optical input sensitivity -9dBm to -28dBm
- Optical input connection: LC / UPC
- 6 SDI reclocked outputs, 3 reclocked outputs using the -R2S
- Reclocking on all outputs at 270Mb/s, 1.483Gb/s, 1.485Gb/s, 2.967Gb/s, 2.970Gb/s
- 5-year transferable warranty
- Power: 4.5 watts