


# IGGY-MADI Installation



Before you set up and operate your IGGY-MADI see the "Important Regulatory and Safety Notices" that shipped with your unit. It is also recommended to refer to the IGGY-MADI User Guide. The IGGY-MADI User Guide is available for download from our website.

## Mounting via Tie-wraps

Refer to the guide that shipped with your install kit for additional details.

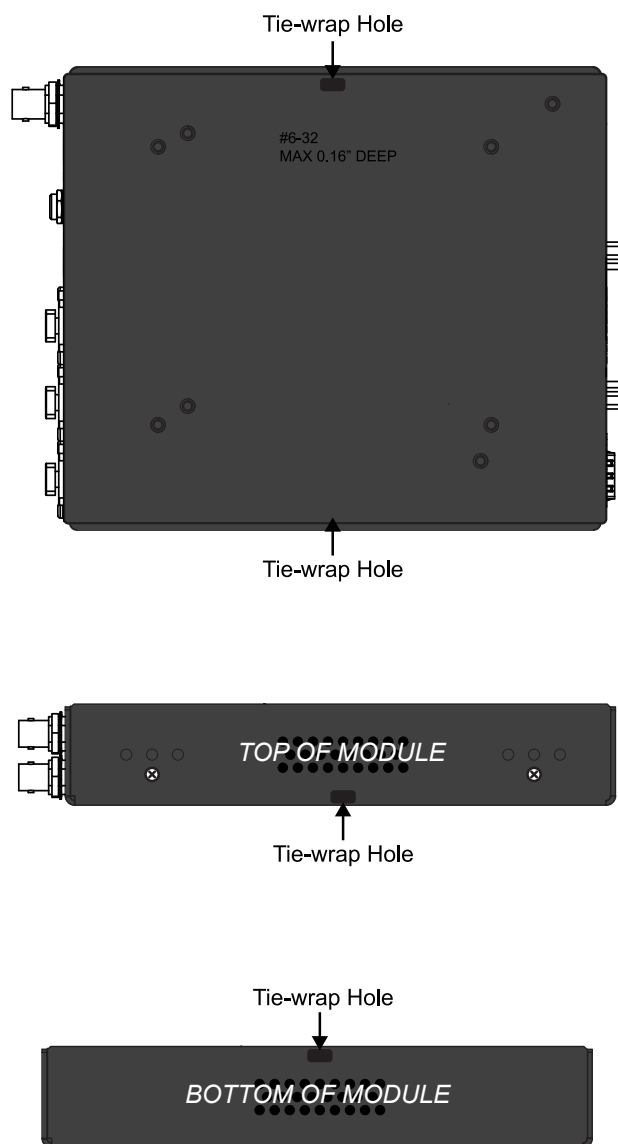


## Network Cabling

To Network Source 2 To Network Source 1 To Facility Network



**CAUTION** The NET 1 Port provides PoE (Power over Ethernet).

## MADI Cabling

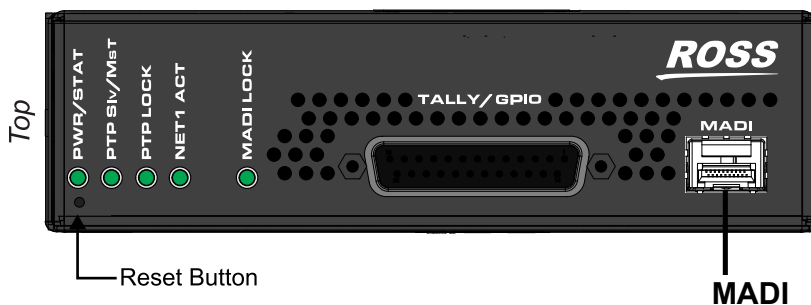

## Reference Cabling (Optional)



## DC Power Connection

**WARNING**

The power supply connector of the IGGY-MADI power supply module must be fully inserted into the IGGY-MADI PWR port and the locking collar fully secured before use. Failure to do so may damage the PWR port on the IGGY-MADI chassis.

**CAUTION**

Ensure to connect the DC Power cord of the power supply to the PWR port on the IGGY-MADI chassis before connecting the power supply to the power source.



## Assigning the IP Address(es)

**Note:** To assign an IP address to an IGGY-MADI, DashBoard must run on a computer with a physical wired Ethernet connection and configured with an IP address in the same range as the default address of the IGGY-MADI (192.168.0.100).

### To assign the IP Address(es) to the IGGY-MADI

1. Ensure that you are running DashBoard software version 8.4.0 or higher.
2. Launch DashBoard by double-clicking its icon on your computer desktop.
3. Select **File > Show Walkabout**.
4. Click **Refresh**.
5. Locate the IGGY-MADI entries in the Walkabout table.  
There is a table entry for each IGGY-MADI Port (CTRL, NET 1, and NET 2).
6. Use the **Address** field for each Port to specify the new IP Address(es) supplied by your IT Department for this device.
7. Ensure the other fields in the table are set to match your network requirements.
8. Click **Reboot** in the row of the Walkabout table for the IGGY-MADI.
9. Manually add the IGGY-MADI to the Tree View in DashBoard as outlined in the **IGGY-MADI User Guide**.

**Note:** Press the **Reset** button to reset the IGGY-MADI, including the IP Address, to the factory default settings. This button is located beside the PWR/STAT LED.



Have a question? Call our free, 24-hour technical support hotline to speak with a live product specialist located right here in our facility.

Tel: (+1) 613 • 652 • 4886

Email: techsupport@rossvideo.com

