


MB-650 Installation and Cabling



Before you set up and operate your MB-650, see the "Important Safety Instructions" section in the *MB-650 User Manual*.
The *MB-650 User Manual* is available on the Gear Documentation disc that accompanied your unit.

Rack Mounting

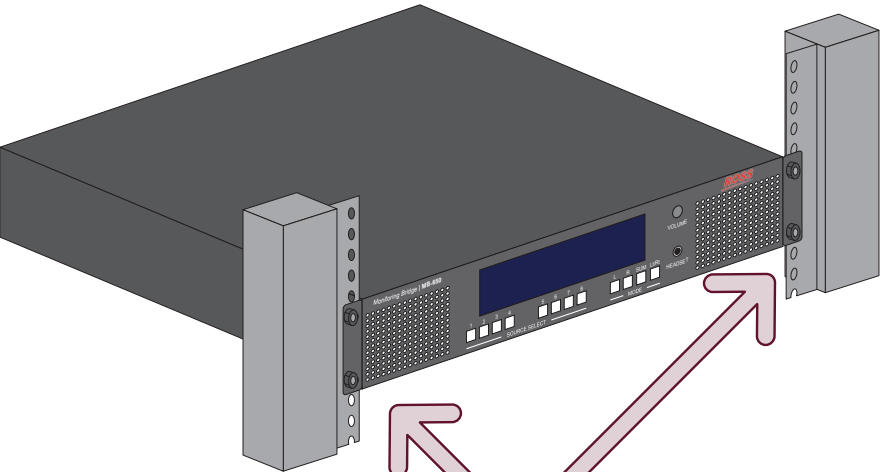


4 x Rack Screws

- Keep the following in mind when installing your MB-650:
- Install the MB-650 for maximum stability and adequate ventilation
 - Ensure the MB-650 is installed in free air space where the ambient temperature is monitoed and controlled to not exceed 40°C (104°F) at the frame front door airflow intake
 - Ensure that adequate space exists in front and behind the MB-650 and on both sides of the frame for airflow exhaust
 - The location of the MB-650 should be accessible, dry, and dust-free


Physical Specifications	
Clearance	Side: 2.00" (50mm)
	Rear: 3.00" (75mm)
Height	3.5" (8.89cm)
Width	19.00" (48.26cm)
Depth	8.5" (21.59cm)
Temperature	maximum: 40°C

Power Cabling

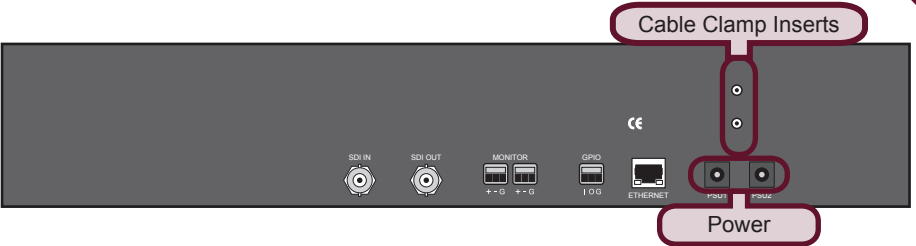


Note: The MB-650 powers on automatically when the power supply is plugged in.

Ethernet Cabling

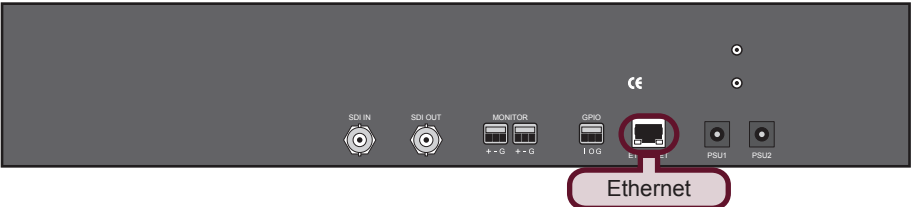


Note: Contact your IT Department before connecting to your facility network to ensure that there are no conflicts.

Video and Audio Cabling

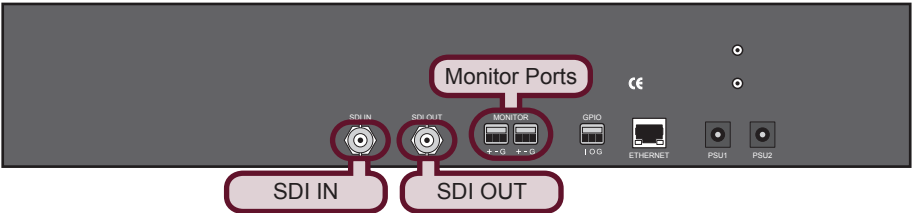

Note: For a -20dBFS input, there will be a +4dBu output.

GPIO Cabling

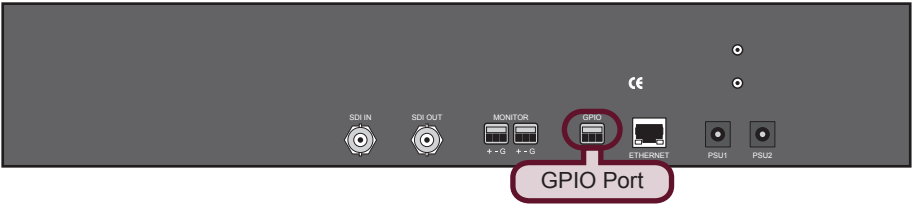

Note: Shorting the I pin to the G pin will mute the front speakers, and the audio level on the rear monitor ports will be controlled by the front volume knob.

Specifications

SDI Input and Output	
Number of Inputs	1
Number of Outputs	1
Connector Type	75ohm BNC
Signal Level	800mV nominal
Return Loss	-10dB to 3G

Analog Audio Monitor Output	
Number of Outputs	2
Connector Type	3-pin terminal blocks
Reference Level	-20dBFS = +4dBu
Frequency Response	+/-0.5dB 20Hz-20kHz
Distortion	<0.01%THD+N (20Hz-20kHz)

Power	
Consumption	90-240VAC 50/60Hz 20W

MB-650 Configuration

Using DashBoard

The DashBoard client software enables you to monitor and configure the MB-650 from a computer connected to your facility network. The MB-650 provides two interfaces in DashBoard that display as nodes in the Tree View under the MB-650: Network Connect, and the MB-650 interface.

To launch DashBoard


1. Ensure the MB-650 is connected to the same network as your DashBoard client computer.
2. Double-click the DashBoard icon on your computer desktop.
3. Power on the MB-650.
4. Wait approximately 30 seconds while the MB-650 establishes network communications.
5. Verify that the MB-650 displays in the Tree View of DashBoard.

If the MB-650 fails to display in DashBoard

1. Verify the ethernet cables are properly connected.
2. Check the link/activity LEDs found on the MB-650 Ethernet port.
3. Ensure the MB-650 network settings for the factory default values.

To access the MB-650 interfaces

1. From the Tree View, expand the node for the MB-650.
2. Select the Slot 0 node to display the Network Connect interface in the right-half of the DashBoard window.
3. Select the Slot 1 node to display the audio interface in the right-half of the DashBoard window.

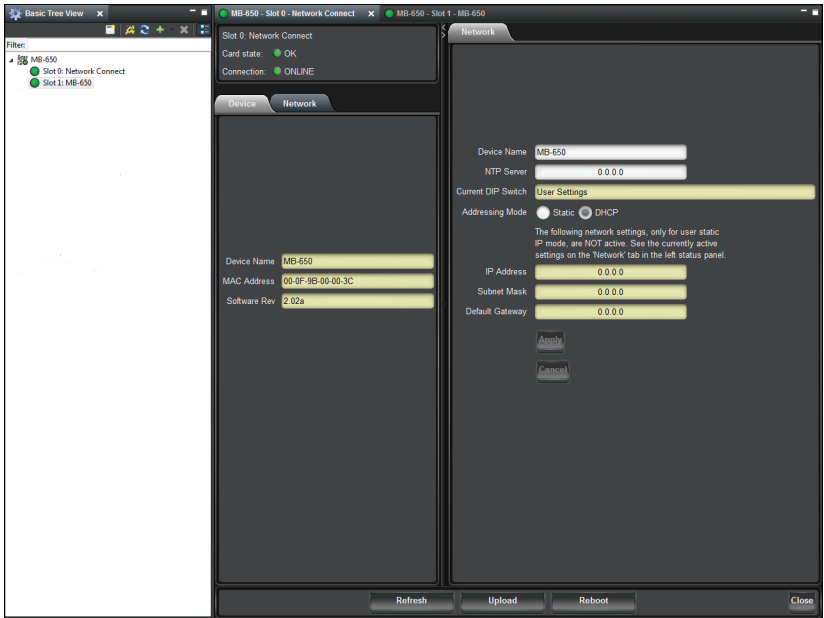

Network Configuration

Once communication is established with the MB-650, the network settings can be adjusted using the following procedure. Note that the steps are optional, you may perform as many, or as few, as needed.

To change the MB-650 network settings

1. From the Tree View, expand the node for the MB-650.
2. Select the **Network Connect** node.
3. Use the **Addressing Mode** options to change between Static and DHCP addressing.
4. Use the **IP Address** field to specify the address of the MB-650.
5. Use the **Subnet Mask** field to specify the subnet mask for your LAN.
6. Use the **Default Gateway** field to specify the IP Address for connection outside the subnet.
7. Click **Apply** to save and apply the new settings.

Setting the Master Password

Right-clicking an MB-650 mode in the Tree View of DashBoard provides the option to Lock/Unlock Access. Locking an MB-650 requires the user to enter a Master Password before gaining access to the MB-650.


To set a new Master Password for the MB-650

1. From the Tree View, right-click the MB-650 node.
2. Select **Lock/Unlock Access**.
3. Select the box for the MB-650 you wish to set a new password for.
4. Type the current password in the **Old Password** field.
5. Type the new password in the **New Password** field.
6. Click **OK** to apply the new password.

Audio Setup via Panel

Using the Control Panel

Selecting the audio channels you want to monitor is provided by the push-buttons located below the audio meters, allowing you to select which stereo pair to route to the speakers.

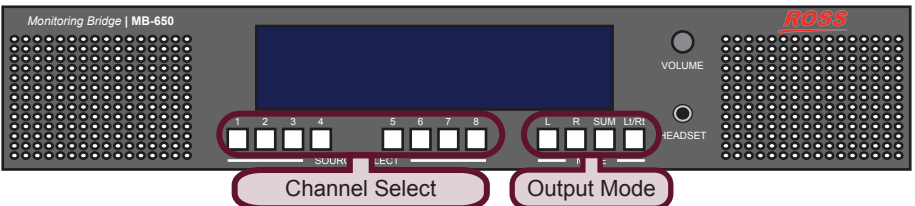

Use the four Mode push-buttons to specify the output mode as follows:

- **L** — routes the left channel of the selected source to the speakers
- **R** — routes the right channel of the selected source to the speakers
- **SUM** — allows any of the channels to be summed together to monitor more than one source at a time
- **Lt/Rt** — provides an Lt/Rt downmix of your 5.1 surround audio

Audio Setup via DashBoard

You can also use the MB-650 interface in DashBoard to specify the audio channel to monitor.

To setup the audio monitoring via DashBoard

1. From the Tree View, expand the node for the MB-650.
2. Select the MB-650 node.
3. Use the **Input Source** field to specify the audio channel to route to the speakers.
4. Use the **Volume** field to set the volume level of the speakers.



Having a problem? Call our free, 24-hour technical support hotline to speak with a live product specialist located right here in our facility.

Tel: (+1) 613 • 652 • 4886

Email: techsupport@rossvideo.com

ROSS