


Ports and Connectors

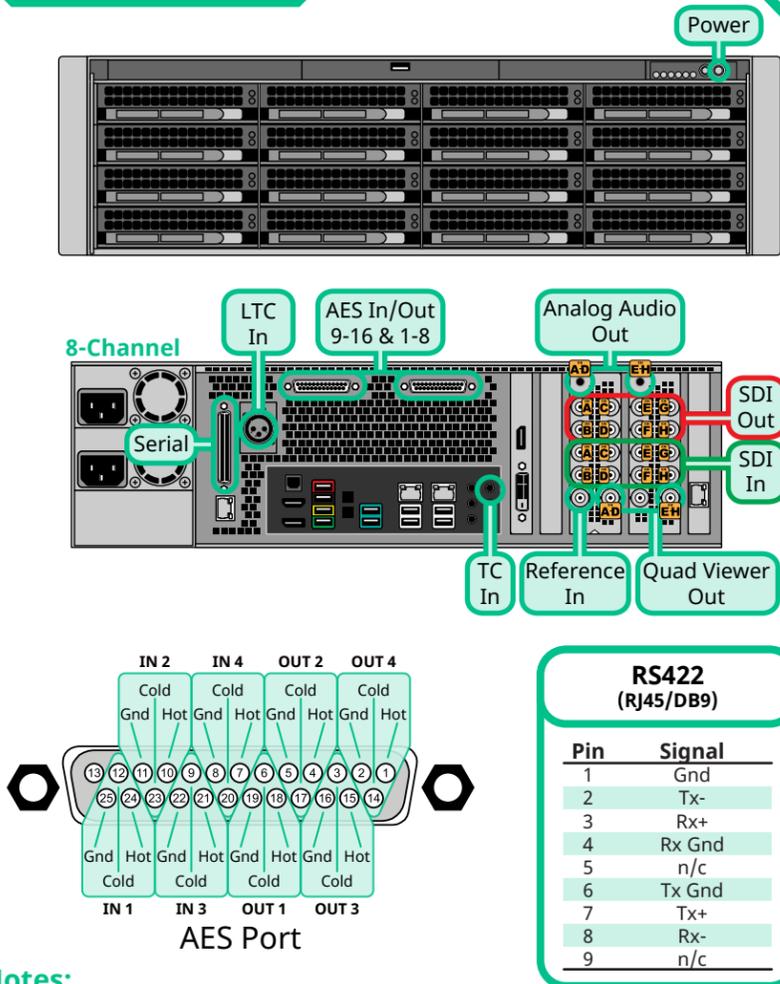


Notes:

- Only the Reference BNC on the left (CHA-D) card is operational when two cards are installed.
- The AES Digital Audio ports are only available on the Mira Replay.
- The number of SDI inputs and outputs depends on the model of server you have.
- If you are recording from, or playing into, an external device you must have all devices connected to the same reference signal to ensure proper timing.
- A breakout cable connects to the Serial port and provides 8 RJ45 serial connectors.
- The RJ45 connectors and DB9 adapters have the same pinout for serial control.
- Both RS-422 serial and ethernet control are supported for remote control.
- The TC In (LINE IN) audio port is used for TC Chase.

Power and Control Cabling

Note: The number of I/O cards in your server depends on the options installed. Which channels are available as inputs or outputs depends on how your server is configured.

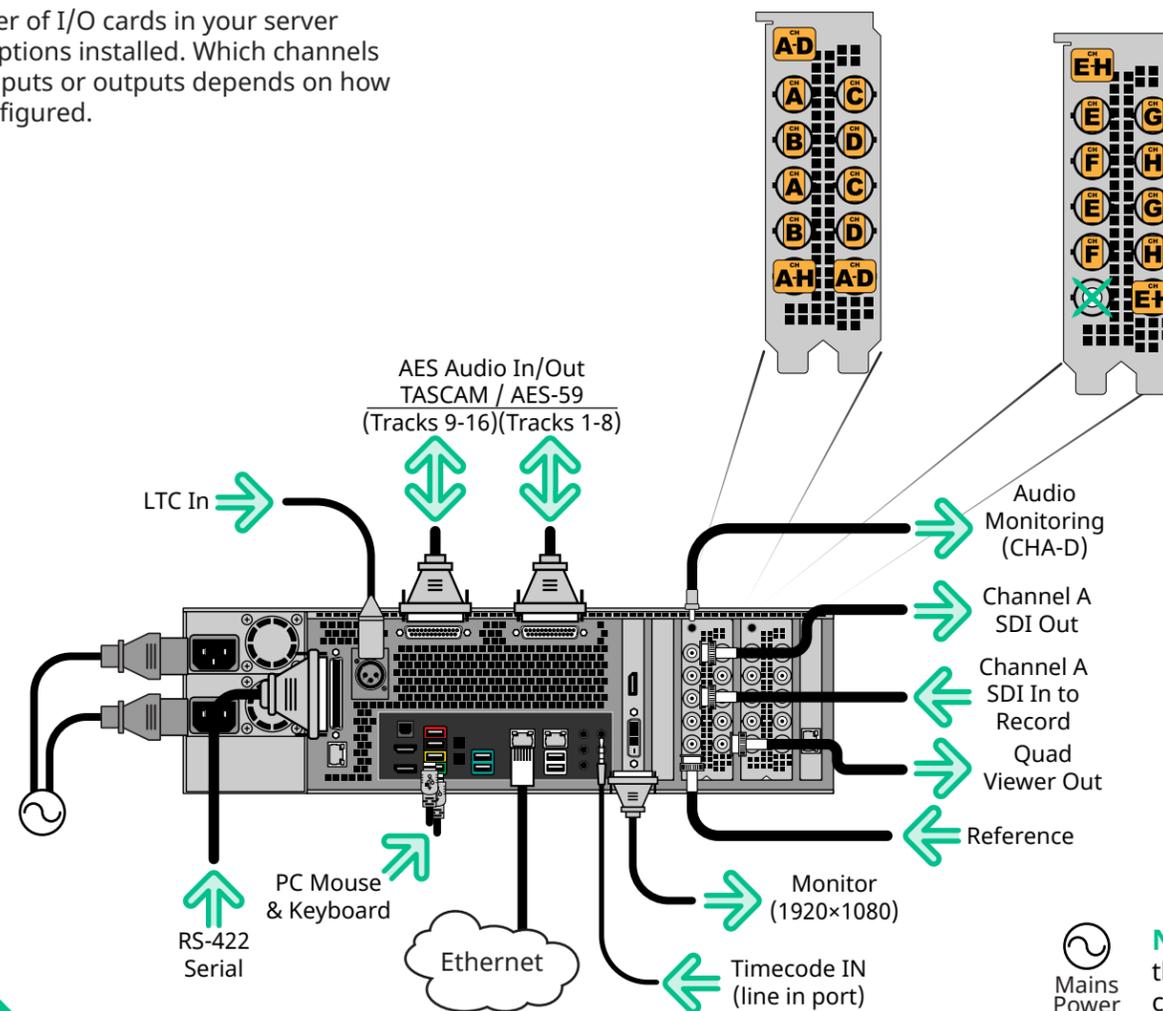

Note: It is recommended that you always connect the AC Power Adapter to the device before connecting to Mains Power.

Specifications

SDI Video Formats	
525i (480i)	59.94Hz
625i (576i)	50Hz
720p	60Hz
720p	59.94Hz
1080i	59.94Hz
1080i	50Hz
1080pSF	24Hz (J2K)
1080pSF	23.98Hz (J2K)
1080p	59.94Hz
1080p	50Hz (AVC-Intra)

Default Passwords	
Windows	Abekas
Administrator	multiflex

Input Voltages	
100 to 240V~	
3 to 1.5A	
60 to 50Hz	

Operating Environment	
Temperature:	20 - 35°C (68 - 95°F)
Humidity:	20 - 80%

Video/Audio Input Specifications	
Video Inputs, HD-SDI	SMPTE 292M 10-bit at 1.5Gb/s
Video Inputs, SD-SDI	SMPTE 259M 10-bit at 270Mb/s
Embedded Audio, HD-SDI	8 Tracks, 48kHz at 24-bit
Embedded Audio, SD-SDI	4 Tracks, 48kHz at 20-bit
AES Discrete Audio	8 or 16 Tracks
Reference Input	Tri-Level HD or Composite Analog SD; Terminating
Native Codec	JPEG-2000 Compression @ 25Mb/s to 200Mb/s

Video/Audio Output Specifications	
Video Outputs, HD-SDI	SMPTE 292M 10-bit at 1.5Gb/s
Video Outputs, SD-SDI	SMPTE 259M 10-bit at 270Mb/s
Embedded Audio, HD-SDI	8 Tracks, 48kHz at 24-bit
Embedded Audio, SD-SDI	4 Tracks, 48kHz at 20-bit
AES Audio	8 or 16 Tracks
Analog Audio Monitoring	AES59-2012/TASCAM Digital
Native Codec	3.5mm headphone connector, unbalanced, line-level at -10dBv, 2 Tracks (1 stereo pair), user selectable to monitor any out
Native Codec	JPEG-2000 Compression @ 25Mb/s to 200Mb/s

Note: Some video formats require specific hardware to be installed in your server.

