



Legislative Control System Commissioning Guide

Version 2.2

Thank you for choosing Ross

You've made a great choice. We expect you will be very happy with your purchase of Ross Technology.

Our mission is to:

1. Provide a Superior Customer Experience
 - offer the best product quality and support
2. Make Cool Practical Technology
 - develop great products that customers love

Ross has become well known for the Ross Video Code of Ethics. It guides our interactions and empowers our employees. I hope you enjoy reading it below.

If anything at all with your Ross experience does not live up to your expectations be sure to reach out to us at solutions@rossvideo.com.



David Ross
CEO, Ross Video
dross@rossvideo.com

Ross Video Code of Ethics

Any company is the sum total of the people that make things happen. At Ross, our employees are a special group. Our employees truly care about doing a great job and delivering a high quality customer experience every day. This code of ethics hangs on the wall of all Ross Video locations to guide our behavior:

1. We will always act in our customers' best interest.
2. We will do our best to understand our customers' requirements.
3. We will not ship crap.
4. We will be great to work with.
5. We will do something extra for our customers, as an apology, when something big goes wrong and it's our fault.
6. We will keep our promises.
7. We will treat the competition with respect.
8. We will cooperate with and help other friendly companies.
9. We will go above and beyond in times of crisis. *If there's no one to authorize the required action in times of company or customer crisis - do what you know in your heart is right. (You may rent helicopters if necessary.)*

Legislative Control System Commissioning Guide

- Ross Part Number: **4500DR-002-2.2**
- Release Date: February 26, 2015.
- Software Issue: **2.2**

The information contained in this Guide is subject to change without notice or obligation.

Copyright

© 2015 Ross Video Limited. Ross® and any related marks are trademarks or registered trademarks of Ross Video Limited. All other trademarks are the property of their respective companies. PATENTS ISSUED and PENDING. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, mechanical, photocopying, recording, or otherwise, without the prior written permission of Ross Video. While every precaution has been taken in the preparation of this document, Ross Video assumes no responsibility for errors or omissions. Neither is any liability assumed for damages resulting from the use of the information contained herein.

Patents


Ross Video products are protected by patent numbers US 7,034,886; US 7,508,455; US 7,602,446; US 7,802,802 B2; US 7,834,886; US 7,914,332; US 8,307,284; US 8,407,374 B2; US 8,499,019 B2; US 8,519,949 B2; US 8,743,292 B2; GB 2,419,119 B; GB 2,447,380 B. Other patents pending.

Environmental Information

The equipment that you purchased required the extraction and use of natural resources for its production. It may contain hazardous substances that could impact health and the environment.

To avoid the potential release of those substances into the environment and to diminish the need for the extraction of natural resources, Ross Video encourages you to use the appropriate take-back systems. These systems will reuse or recycle most of the materials from your end-of-life equipment in an environmentally friendly and health conscious manner.

The crossed-out wheeled bin symbol invites you to use these systems.



If you need more information on the collection, reuse, and recycling systems, please contact your local or regional waste administration.

You can also contact Ross Video for more information on the environmental performances of our products.

Company Address



Ross Video Limited

8 John Street
Iroquois, Ontario
Canada, K0E 1K0

Ross Video Incorporated

P.O. Box 880
Ogdensburg, New York
USA 13669-0880

General Business Office: (+1) 613 • 652 • 4886

Fax: (+1) 613 • 652 • 4425

Technical Support: (+1) 613 • 652 • 4886

After Hours Emergency: (+1) 613 • 349 • 0006

E-mail (Technical Support): techsupport@rossvideo.com

E-mail (General Information): solutions@rossvideo.com

Website: <http://www.rossvideo.com>

Contents

Introduction	1
Overview	1-1
Documentation Conventions	1-1
Interface Elements	1-1
Touch-Screen Support	1-1
User Entered Text	1-1
Referenced Guides	1-1
Menu Sequences	1-1
Important Instructions	1-1
Contacting Technical Support	1-2
System Overview	2
Legislative Control System Architecture	2-1
Pre-Commissioning	3
Gathering Customer Information	3-1
Installing DashBoard and the LCS Panel for Pre-Configuration	3-2
Creating XPression Graphics for the LCS	3-3
Adding Images to the LCS	3-3
Specifying General Settings	3-4
Adding Cameras	3-5
Enabling Microphone System Communication	3-6
Creating Representatives	3-7
Creating Marks	3-8
Copying LCS Panel Files for Transfer to the Customer LCS Panel	3-9
On-Site Commissioning	4
Setting up Equipment	4-1
Installing and Configuring MasterPanel Software	4-2
Preparing the LCS Panel	4-4
Connecting Carbonite to Cameras, XPression, and the LCS	4-4
Setting Up Communication Between Carbonite, XPression, and the LCS	4-5
Adding Carbonite as an LCS Data Source	4-5
Establishing a Device Connection to the Joystick Server	4-6
Adding the Joystick Server as an LCS Panel Data Source	4-6
Planning Shots and Assigning them to Marks	4-7
Planning Shots	4-7
Assigning Shots to Marks	4-7
Configuring Cameras and Creating Shots in Camera Control Panels	4-8
Upgrading LCS Panel Software	4-8
The CamBot Control Panel	5
Installing the Camera Control Panel Files	5-1
Launching the Camera Control Panel	5-1
Adding the Joystick Server as a Data Source	5-2
Configuring Cameras	5-2
Creating, Storing, and Recalling Shots	5-3
User Interface Reference	5-4
Camera Configuration Window	5-4

Camera Control Window	5-6
The Sony Control Panel	6
Installing the Camera Control Panel Files	6-1
Launching the Camera Control Panel	6-1
Adding the Joystick Server as a Data Source	6-2
Configuring Cameras	6-2
Creating, Storing, and Recalling Shots	6-3
User Interface Reference	6-4
Camera Configuration Window	6-4
Camera Control Window	6-7
The Panasonic Control Panel	7
Installing the Camera Control Panel Files	7-1
Launching the Camera Control Panel	7-1
Adding the Joystick Server as a Data Source	7-2
Configuring Cameras	7-2
Creating, Storing, and Recalling Shots	7-3
User Interface Reference	7-4
Camera Configuration Window	7-4
Camera Control Window	7-8

Introduction

This chapter contains the following sections:

- “**Overview**” on page 1–1
- “**Documentation Conventions**” on page 1–1
- “**Contacting Technical Support**” on page 1–2

Overview

This commissioning guide is intended to help experienced systems integrators plan and deploy DashBoard Legislative Control Systems (LCS).

This guide describes the entire process, and includes detailed procedures for commissioning the LCS.

Documentation Conventions

Special text formats are used in this guide to identify parts of the user interface, text that a user must enter, or a sequence of menus and submenus that must be followed to reach a particular command.

Interface Elements

Bold text is used to identify a user interface element such as a dialog box, menu item, or button. For example:

In the **Media Manager Client**, tap **Channel 1** in the **Channels** section.

Touch-Screen Support

This guide assumes you are using a touch-screen. The guide includes instructions to tap user interface elements. If you are using a mouse instead of a touch screen, click the mouse instead of tapping.

User Entered Text

Courier text is used to identify text that a user must enter. For example:

In the **File Name** box, enter `Channel01.property`.

Referenced Guides

Italic text is used to identify the titles of referenced guides, manuals, or documents. For example:

DashBoard Server and User Rights Management User's Guide

Menu Sequences

Menu arrows are used in procedures to identify a sequence of menu items that you must follow. For example, if a step reads “**Server > Save As**,” you would tap the **Server** menu and then tap **Save As**.

Important Instructions

Star icons are used to identify important instructions or features. For example:

- ★ Contact your I.T. Department if you experience communication issues with DashBoard and are running anti-virus software.

Contacting Technical Support

At Ross Video, we take pride in the quality of our products, but if problems occur, help is as close as the nearest telephone.

Our 24-hour Hot Line service ensures you have access to technical expertise around the clock. After-sales service and technical support is provided directly by Ross Video personnel. During business hours (Eastern Time), technical support personnel are available by telephone. After hours and on weekends, a direct emergency technical support phone line is available. If the technical support person who is on call does not answer this line immediately, a voice message can be left and the call will be returned shortly. This team of highly trained staff is available to react to any problem and to do whatever is necessary to ensure customer satisfaction.

- **Technical Support:** (+1) 613-652-4886
- **After Hours Emergency:** (+1) 613-349-0006
- **E-mail:** techsupport@rossvideo.com
- **Website:** <http://www.rossvideo.com>

System Overview

The Legislative Control System (LCS) integrates several technologies to deliver a system that enables you to produce high-quality video of legislative proceedings. It controls robotic video cameras and provides an easy-to-use interface for switching video, including graphics.

The LCS is configured and operated from the LCS panel, which is a DashBoard software application that is customized for your legislature. An additional camera panel enables you to create shots and control cameras directly.

Legislative Control System Architecture

Every Legislative Control System includes some or all of the following:

- One DashBoard LCS all-in-one computer (including monitor, keyboard and mouse), with the following Ross Video software installed:
 - › DashBoard Control System
 - › An LCS panel (DashBoard panel application)
 - › MasterPanel robotic control application
 - › A camera control panel (DashBoard panel application)
- One additional touch-screen monitor, for displaying the camera control panel.
- One Carbonite Switcher, consisting of a control panel and frame
- One XPression Studio system, for graphics creation, real-time rendering, and playout.
- One Ross Video joystick panel.
- Two to ten robotic camera units (CamBot and/or Panasonic and/or Sony).
- One SDI to DVI-D converter (AJA HDP2).
- A supported delegate microphone system.
- A network control switch

Note: The preceding list includes some equipment not provided by Ross Video.

Pre-Commissioning

This chapter describes commissioning tasks that can be done off-site in advance of on-site commissioning. Pre-commissioning tasks include information gathering and off-site pre-configuration of the LCS panel.

IMPORTANT: Some procedures in this chapter depend on others. Perform them in the order indicated.

Pre-commissioning tasks described in this chapter include:

- “**Gathering Customer Information**” on page 3–1
- “**Installing DashBoard and the LCS Panel for Pre-Configuration**” on page 3–2
- “**Creating XPression Graphics for the LCS**” on page 3–3
- “**Adding Images to the LCS**” on page 3–3
- “**Specifying General Settings**” on page 3–4
- “**Adding Cameras**” on page 3–5
- “**Enabling Microphone System Communication**” on page 3–6
- “**Creating Representatives**” on page 3–7
- “**Creating Marks**” on page 3–8
- “**Copying LCS Panel Files for Transfer to the Customer LCS Panel**” on page 3–9

Gathering Customer Information

The key to a successful LCS implementation is proper planning. During the pre-sales cycle, information is gathered to determine customer requirements so LCS features and graphics can be adjusted or developed if needed. Then, before commissioning begins, additional information is gathered to support customization of the LCS to suit the customer’s legislative chamber.

Before system commissioning begins, the following information must be gathered:

- Name of the legislative body.
- Nation in which the legislative body is located.
- State, province, region, or territory in which the legislative body is located (if applicable).
- Names of all political parties represented.
- Which layout view the LCS panel will use (Seat Layout view or Mark Layout view).
- Information about what graphics are required and about who will produce them. The LCS includes a standard XPression graphics package for bringing representative info on and off air in a lower-third graphic. The graphics can be modified. Additional graphics can be created. Depending on customer requirements and project complexity, an additional DashBoard panel may be required to interact with the graphics package.

Note: XPression graphics for use with the LCS must be created in a particular way to work properly. For more information, see “**Creating XPression Graphics for the LCS**” on page 3–3.

- A background photo or diagram of the legislative chamber, showing the view from above. The image must be either .png or .jpg format. If the image is too big to fit on-screen, scroll bars are available.

If you are using a 1080P format monitor, the maximum image size that can be displayed without scroll bars is as follows:

- › For the **Mark Layout** background image — 1611 pixels wide by 707 pixels high.
- › For the **Seat Layout** background image — 1433 pixels wide by 1067 pixels high.

Tip: Note the pixel height and width of the background image. This information is useful when specifying mark positions.

- A diagram of the legislative chamber showing all marks and camera positions. Marks are locations you may want to shoot and show on air, including representative seats, podiums, the speaker’s chair, chamber insignia, etc.

- Information about each camera:
 - › Position in the legislative chamber
 - › Type of camera (brand/model)
 - › Type of lens (to determine effective range)
 - › Effective range of motion (to determine coverage)
- Data about each representative:
 - › First Name and Last Name
 - › District ID (if applicable)
 - › District Name (if applicable)
 - › Party (if applicable)
 - › Portfolio(s) (if applicable)
- A representative **Image** photo for each representative. The representative **Image** photo appears in the **Representative Info** area in the LCS panel. It does not appear on-air.

The photos must be either .png or .jpg format. DashBoard automatically resizes photos to fit, but to avoid distortion it's important to maintain the correct ratio of height to width:

 - › For LCS panels that use the **Mark Layout** view, the **Image** photo area is **155 pixels wide by 284 pixels high**.
 - › For LCS panels that use the **Seat Layout** view, the **Image** photo area is **100 pixels wide by 452 pixels high**.
- One head shot photo for each representative, if the LCS panel uses photos for mark icons.

The **Head Shot** photo appears as an icon to indicate the representative's position in the legislative chamber. Head Shot photos are required for all LCS panels that use the **Seat Layout** view, and are optional for LCS panels that use the **Mark Layout** view. The photos are shown within the LCS panel but not on-air.

The photos must be either .png or .jpg format. If necessary, DashBoard automatically shrinks photos to fit within the mark size you specify.

For best performance and a consistent visual appearance, make all the images the same size, and keep them small. A typical size might be 70 pixels wide by 85 pixels high.

Installing DashBoard and the LCS Panel for Pre-Configuration

You can pre-configure many properties of the LCS panel on your own computer in advance, and then simply transfer the panel data to the customer's DashBoard LCS computer during on-site commissioning. Before pre-configuring the LCS panel, you must install DashBoard and the LCS panel on a computer that meets the DashBoard system requirements.

To install DashBoard:

1. Download DashBoard software and the DashBoard User Guide from the Ross Video website: <http://www.rossvideo.com/control-systems/dashboard/index.html>
2. Consult the *DashBoard User Guide (8351DR-004)* to confirm that your computer meets the system requirements for installing DashBoard.
3. Follow the installation instructions in the *DashBoard User Guide (8351DR-004)* to install DashBoard.

To install the LCS Panel:

1. Extract the **LCS** folder from the zip file, and place it in the C:\ directory.
2. Start DashBoard.
3. From the **Views** menu, tap **File Navigator**.
4. On the **File Navigator** tab, tap the green + symbol.

The **Browse for Folder** dialog appears.
5. Navigate to the **LCS** folder located in **Computer > OS (C)**, and then tap **OK**.

6. In the **File Navigator** tree, expand the **LCS** folder to show the **LCS.grid** file.
7. To open the LCS panel anytime, double-tap the **LCS.grid** file.

The LCS panel will always be available from the DashBoard File Navigator.

Creating XPression Graphics for the LCS

The LCS includes a basic XPression graphics project for displaying representative data in a lower third. You can alter the graphics project to suit your needs.

This section describes some aspects of the XPression project, and how XPression graphics must be organized to work with the LCS panel.

The XPression project includes two scenes: **Preview** and **Program**. The **Preview** scene appears in the LCS panel to show the operator how the preview shot looks with the graphic. The **Program** scene is taken to air. Both scenes include representative data streamed from the LCS panel to XPression through Datalinq.

If the graphics mode of the LCS panel is set to **Auto**, the graphic appears every time a shot is taken to air. The transition occurs as follows:

1. The operator taps the **TAKE** button to start the transition.
2. The graphic transitions out.
3. The new shot is taken to air.
4. The updated graphic transitions in.

You can modify the graphics in XPression, or create your own. To work with the LCS panel, the XPression project must be organized as follows:

- The **Program** scene must use **TakeID 02**.
- The **Preview** scene must use **TakeID 03**.
- The **Program** scene (**TakeID 02**) must be directed to **output channel 1**.
- The **Preview** scene (**TakeID 03**) must be directed to **output channel 2**.
- There must be a pause between the in and out animations.

By default, this pause is 30 frames. If you set a shorter pause in XPression, the pause will still be 30 frames because that is how long the LCS panel pauses between animations.

Note: If you want to create complex animations or multiple animations, you can create a separate DashBoard panel to control them. For more information, contact your Ross Video consultant.

Adding Images to the LCS

IMPORTANT: Do not use high resolutions images! Convert them to lower resolutions, as described in this section.

Each LCS panel uses the following types of images:

- **Background image** — a drawing or photo of the legislative chamber. The view should be from above. The image must be either .png or .jpg format. If the image is too big to fit on-screen, scroll bars are available.

If you are using a 1080P format monitor, the maximum image size that can be displayed without scroll bars is as follows:

- › For the **Mark Layout Background** image — **1611 pixels wide by 707 pixels high**.
- › For the **Seat Layout Background** image — **1433 pixels wide by 1067 pixels high**.

Tip: Note the pixel height and width of the background image. This information is useful when specifying mark positions.

- **Representative Image** photos — one photo per representative.
The photos must be either .png or .jpg format. DashBoard automatically resizes photos to fit, but to avoid distortion it's important to maintain the correct ratio of height to width:
 - › For LCS panels that use the **Mark Layout** view, the **Image** photo area is **155 pixels wide by 284 pixels high**.
 - › For LCS panels that use the **Seat Layout** view, the **Image** photo area is **100 pixels wide by 452 pixels high**.
- **Head Shot photos** — one small photo per representative, if the LCS panel uses photos for mark icons.
The **Head Shot** photo appears as an icon to indicate the representative's position in the legislative chamber. Head Shot photos are required for all LCS panels that use the **Seat Layout** view, and are optional for LCS panels that use the **Mark Layout** view. The photos are shown within the LCS panel but not on-air.
The photos must be either .png or .jpg format. If necessary, DashBoard automatically shrinks photos to fit within the mark size you specify.
For best performance and a consistent visual appearance, make all the images the same size, and keep them small. A typical size might be **70 pixels wide by 85 pixels high**.

To store images:

- On the DashBoard LCS computer, save the images in the **C:\LCS\Images\Photos** folder.

Specifying General Settings

1. Start dashboard and open the LCS panel.
2. In the LCS panel, tap the **Config** button.
The **Legislative Control System Configuration** window appears.
3. Tap the **General** tab.

The screenshot shows the 'General' configuration window. At the top, there are tabs for 'General', 'Devices', 'Cameras', 'Representatives', 'Marks', 'Mic Systems', and 'Joystick'. The 'General' tab is selected. The window is divided into several sections:

- Location:**
 - Body:** Mariposa City Council
 - Country:** Canada
 - State:** Ontario
- Images:**
 - Seat Layout Background:** seat layout.png
 - Mark Layout Background:** (empty field)
- Parties:** A table with two columns: 'Party Key' and 'Party Name'.

Party Key	Party Name
1	Progressive
2	Traditionalist
3	Socialist
4	Libertarian

 Below the table are 'Add', 'Name here', and 'Delete' buttons.
- Debug:** OFF (dropdown menu)
- Save Changes** button

At the bottom of the window, there are 'Reload Data', 'Seat Layout', 'Mark Layout', and 'Conf' buttons.

4. In the **Location** area, specify data about your legislature:
 - **Body** — Type the name of your legislative body
 - **Country** — Type the name of your nation.
 - **State** — Type the name of the state, province, region, or territory where the legislature is located.
5. In the **Images** area, specify the filename of the background image for the LCS panel. Use the box that corresponds to the type of layout your LCS panel uses.

6. In the **Parties** area, define political parties or groups (if any):
 - a. In the blank box at the bottom of the **Parties** area, type the name of the party you want to add.
 - b. Tap **Add**.
The new party appears on the list of parties.
 - c. If you want to delete a party, tap it in the list and then tap **Delete**.
7. Tap the **Save Changes** button.

Adding Cameras

Before you begin, number each camera on your diagram of the legislative chamber, starting at 1. Camera numbers are used during configuration and operation of the system.

In this procedure, you add cameras to the LCS panel. Later, on-site, you will configure the cameras and create shots on a separate camera control panel.

To add cameras to the LCS panel:

1. In the LCS panel, tap the **Cameras** tab.



2. Add a camera to the list, and specify the camera's properties:
 - a. Tap the **ADD** button.
A new camera entry appears in the list.
 - b. In the **Camera Name** box, type a name for the camera.
 - c. In the **Switcher Input** box, specify the switcher crosspoint associated with the camera.
Tip: For easy reference, use the camera numbers as switcher crosspoint numbers; the switcher inputs also start at 1.
 - d. In the **Protocol** list, select the camera type.
 - e. If your LCS panel uses the **Mark Layout** view, in the **X-Position** and **Y-Position** boxes, specify the X (horizontal) and Y (vertical) position of the camera, in pixels.
Tip: An X value of 0 places the camera on the far left side. A Y value of 0 places the camera at the top.

3. Tap the **Save Changes** button.
4. If your LCS panel uses the Mark Layout view, tap the **Mark Layout** button and find the new camera on the layout. If the camera position is not correct, tap the **Config** button, go to the **Cameras** tab, adjust the **X-Position** and **Y-Position** values, tap **Save Changes**, and then check again.
5. Repeat **Steps 2 to 4** to add all cameras.


Enabling Microphone System Communication

Enable the LCS panel to communicate with your delegate microphone system (if applicable).

This procedure applies only if you want your microphone system to select previews or automatically trigger camera shot recalls.

To enable the listener:

1. In the LCS panel, tap the **Config** button.
The **Legislative Control System Configuration** window appears.
2. Tap the **Mic Systems** tab.

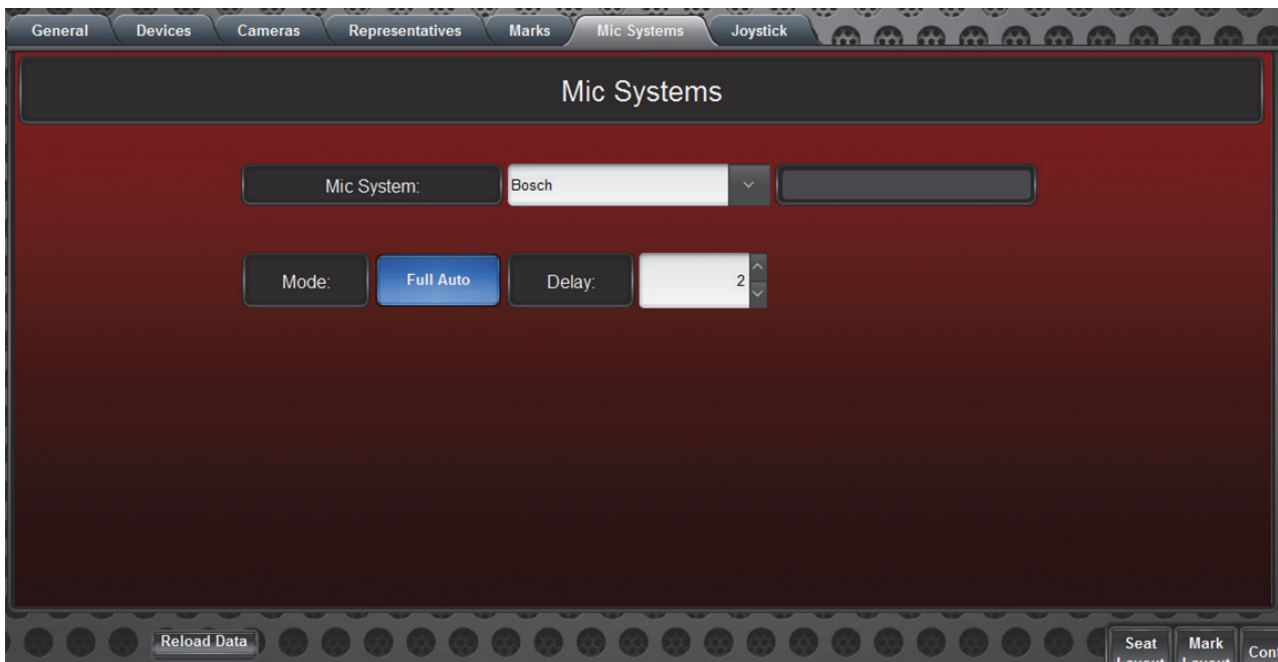

3. From the **Mic System** list, select the type of delegate microphone system you are using.
 - **None** — Select this option if you want to select previews manually.
 - **IRC** — Select this option if you have an International Roll Call (IRC) microphone system.
 - **Bosch** — Select this option if you have a Bosch microphone system.
4. If you have a Bosch microphone system, tap the **Mode** button to select an operating mode:
 - **Semi-Auto** — The Bosch system selects preview shots, but an operator must take them to air.
 - **Full Auto** — The Bosch system selects a preview shot and takes it to air. No operator is required.

- If you have a Bosch microphone system using **Full Auto** mode, in the **Delay** box specify a delay period in seconds.

When a microphone goes live, the system pauses for the number of seconds specified in the **Delay** box before taking the preview shot to air.

IMPORTANT: Set the delay to be longer than the longest shot recall. If a shot recall takes longer than the delay, the camera may still be moving when the shot goes to air.

Creating Representatives

When you create representatives, consult the list you created that maps representatives to marks. Create the representatives in the same order, starting from number 1.

To create representatives:

- In the LCS panel, tap the **Config** button.
- On the **Representatives** tab, tap the **ADD** button.

A new representative entry is added to the bottom of the list.

The screenshot shows the 'Representatives' configuration interface. On the left, a scrollable list of representative names includes David Cooper, Don Locke, Glen Maxheleau, Gordon Hanes, Gordon Mitchell, Hilary Powell, Isaac Jeong, James Peltzer, Jeff Nidd, Kais Hassanali, Kelly Lackey, Ken Kicksee, Kevin Anderson, Kim Hogeveen, Neil Takahara, Paul Thomson, Richard Cunningham, Roger Egan, and Stacey Moore. The main configuration area has the following fields and options:

- Representative Number:** 33
- First Name:** Jeff
- Last Name:** Moore
- District ID:** 4
- District Name:** Ossawippi West
- Party:** Progressive
- Portfolios:** Commercial Development Officer
- Image:** Team_JeffMoore.PNG
- Head Shot:** Jeff Moore.jpg

Buttons for 'Add', 'Delete', 'Add Portfolio', and 'Save Changes' are present. At the bottom, there are 'Previous', 'Next', and 'Reload Data' buttons.

- Specify the following data as required:
 - First Name** — Specify the first name of the representative.
This name appears in the Seat Layout and Mark Layout views, and in on-air graphics.
 - Last Name** — Specify the last name of the representative.
This name appears in the Seat Layout and Mark Layout views, and in on-air graphics.
 - District ID** — Specify the district identifier (if any) for the representative.
This ID appears in the Seat Layout and Mark Layout views, and in on-air graphics.
 - District Name** — Specify the district name for the representative.
This name appears in the Seat Layout and Mark Layout views, and in on-air graphics.
 - Party** — Select a party for the representative.
Tip: If the representative's party is not listed, you must add it. For more information, see “**Specifying General Settings**” on page 3–4.

4. In the **Portfolios** area, edit the representative's portfolio(s) as required:
 - **To add a portfolio**, type the name of the portfolio in the box at the bottom of the **Portfolios** area, and then tap the **Add** button.
 - **To rename a portfolio**, double-tap the portfolio name in the list, and then type the new portfolio name.
 - **To delete a portfolio**, tap the portfolio in the list, and then tap the **Delete** button.
5. In the **Image** box, type the file name of the representative image photo.
6. If there is a head shot photo for the representative, in the **Head Shot** box, type the file name of the head shot photo.

Head shot photos are required for LCS panels that use the **Seat Layout** view, and optional for LCS panels that use the **Mark Layout** view.
7. Tap the **Save Changes** button.
8. Repeat **Steps 2 to 7** for each representative.

Creating Marks


Marks represent shot target positions in the legislative chamber. Marks may represent the positions of representative seats, podiums, the speaker's chair, areas of the public gallery, etc.

Before you begin, name each mark on your diagram of the legislative chamber. Mark names typically follow a naming or numbering convention that indicates their position in the chamber. Mark names are used during configuration and operation of the system.

To create marks:

1. In the LCS panel, tap the **Config** button.
2. On the **Marks** tab, tap the **Engineering** button.
3. Tap the **ADD** button.

A new mark entry is added to the bottom of the list.

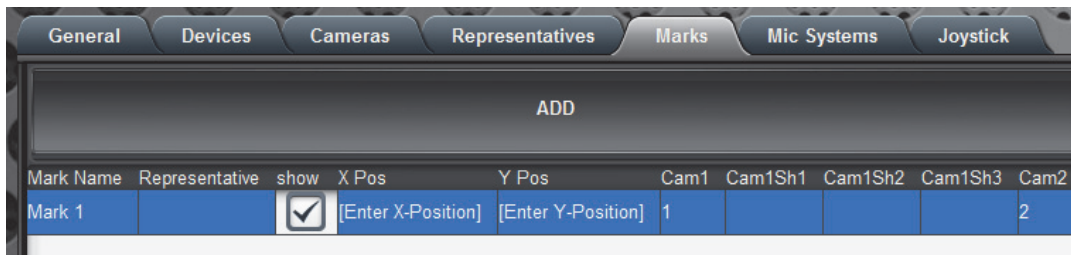

4. In the **Mark Name** box, type the name of the mark.
5. In the **Representative** box, select the representative who sits at the mark location.

Tip: If the mark is not associated with a representative, select the blank entry from the list.
6. In the **X Pos** box, type the horizontal position of the mark, in pixels.

A value of **0** places the mark on the left side of the chamber. The **X Pos** and **Y Pos** values determine the position of the top left corner of the mark icon.
7. In the **Y Pos** box, type the vertical position of the mark, in pixels.

A value of **0** places the mark at the top of the chamber. The **X Pos** and **Y Pos** values determine the position of the top left corner of the mark icon.

8. In the **Mic ID** box, type the string that the delegate microphone system sends to indicate that the microphone at the mark location is activated.
Note: This applies only to systems that include a delegate microphone system used for selecting previews and/or triggering video transitions.
9. Repeat **Steps 3 to 8** for each mark in the chamber.
10. When you are finished creating marks, tap the **Save Changes** button.

Copying LCS Panel Files for Transfer to the Customer LCS Panel

When you are finished pre-configuring the LCS panel, copy the LCS panel files so you can transfer them to the customer's LCS computer on-site.

Note: This procedure is not required if you are performing the pre-commissioning tasks on the LCS computer being commissioned.

To copy LCS panel data:

1. Close Dashboard.
2. Navigate to **Computer > OS (C)**.
3. Copy the **LCS** folder to a USB stick.
4. When the transfer is complete, remove the USB stick.

On-Site Commissioning

This chapter describes the tasks you must do on-site to set up a Legislative Control System (LCS).

IMPORTANT: Before you start performing on-site commissioning tasks, you must complete the pre-commissioning tasks as described in “**Pre-Commissioning**” on page 3–1.

IMPORTANT: Some procedures in this chapter depend on others. Perform them in the order indicated.

On-Site commissioning tasks described in this chapter include:

- “**Setting up Equipment**” on page 4–1
- “**Installing and Configuring MasterPanel Software**” on page 4–2
- “**Preparing the LCS Panel**” on page 4–4
- “**Connecting Carbonite to Cameras, XPression, and the LCS**” on page 4–4
- “**Setting Up Communication Between Carbonite, XPression, and the LCS**” on page 4–5
- “**Adding Carbonite as an LCS Data Source**” on page 4–5
- “**Establishing a Device Connection to the Joystick Server**” on page 4–6
- “**Adding the Joystick Server as an LCS Panel Data Source**” on page 4–6
- “**Planning Shots and Assigning them to Marks**” on page 4–7
- “**Configuring Cameras and Creating Shots in Camera Control Panels**” on page 4–8

This chapter also describes how to upgrade LCS software while preserving data specific to your LCS panel(s). For more information, see “**Upgrading LCS Panel Software**” on page 4–8.

Setting up Equipment

Set up the following equipment:

- Carbonite switcher (control panel and frame)
- XPression Studio graphics system
- DashBoard LCS all-in-one computer, including keyboard and mouse.
- Touch-screen monitor (for camera control panel)
- Ross Video joystick panel
- Robotic camera units (CamBot and/or Panasonic and/or Sony)
- Network switch
- SDI to DVI-D converter AJA HA5
- Delegate microphone system (if applicable)

Installing and Configuring MasterPanel Software

MasterPanel is an application that controls CamBot robotic heads and interprets data from the Ross Video joystick panel. It is required if your system includes a Ross Video joystick panel. Although LCS users do not interact with the MasterPanel user interface, MasterPanel must be running whenever the LCS is in use.

Typically, MasterPanel is pre-installed on the DashBoard LCS computer. In some cases, Ross Video may instruct you to upgrade to a newer version.

To install or upgrade MasterPanel:

1. On the DashBoard LCS computer, navigate to the C:\ directory.
2. If the C:\ directory contains a **Cambotics** folder, rename the folder so it can act as a backup.
For example, you might rename the folder **Cambotics_backup**.
3. In the C:\ directory, create a new folder named **Cambotics**.
4. Extract the contents of the **masterpanel** zip file into the C:**Cambotics** folder.
5. If you are adding the LCS to an existing CamBot system and you want to retain data such as camera IP addresses, camera names, etc, do the following:
 - a. Navigate to the **Cambotics backup** folder you created in **Step 2**.
 - b. Select all files that end in a **.cam** extension, and copy them.
 - c. Paste the copied files into the C:**Cambotics** folder.

When prompted about existing files with the same names, tap the **Copy and Replace** option.

To configure MasterPanel:

1. On the DashBoard LCS computer, navigate to the C:**Cambotics** folder.
2. If your system includes CamBot robotic heads, edit the **devices.cam** file, as follows:
 - a. Open the **devices.cam** file in a text editor, such as Notepad.
 - b. In the list of cameras at the end of the file, specify the **camera number**, **IP address**, **name**, and **shot capacity** for each camera in your system.

Tip: If you are adding the LCS to an existing CamBot system, the IP addresses and camera names may already be defined.

Tip: Each line contains several pieces of data, separated by spaces. The line format is described at the start of the file.

Note: The maximum number of cameras supported by the LCS is ten. The maximum shot capacity for CamBot heads is **400**.

Note: If your system includes CamBots plus Sony and/or Panasonic robotic cameras, you must ensure that each camera has a unique camera number. For example, you might number Sony cameras as 1, 2, 4, and 7, and number CamBot cameras as 3, 5, 6, and 8. For CamBots, camera numbers are defined in the **devices.cam** file. For Sony and Panasonic cameras, they are defined in the camera control panels. Steps for configuring Sony and Panasonic cameras appear later in this guide.

Note: If you add cameras or update camera IP addresses in the **devices.cam** file, you must also restart the CamBot Camera Control panel, or tap the **Refresh Master Panel Connection** button from within the CamBot Camera Control panel.

Refreshes the connection to the MasterPanel application. Enables you to establish a connection to cameras that have been added or that have had their IP addresses changed in the MasterPanel devices.cam file.

- c. Save and close the **devices.cam** file.

3. Edit the **masterpanel1.exe.config** file, as follows:

a. Open the **masterpanel1.exe** file in a text editor, such as Notepad.

b. Find the section of the file that resembles the following:

```
<CambotControlPanel
  MaxDevices="8"
  DeviceButtonsPerRow="8"
  MaxShots="96"
  MaxVias="16"
  EnableShotReflow="true"
  EnableCameraWindowButtonBar="true"
  EnableNonModalJoysticksWindow="true"
  EnableMainWindowNotAlwaysOnTop="false"
  MouseWheelTimeIncrement="15"
```

c. Set the **MaxDevices** value to **10**.

d. Set the **DeviceButtonsPer Row** value to **10**.

e. Set the **MaxShots** value to the **shot capacity** you defined in the **devices.cam** file (maximum400).

f. If you do not want the **CamBot Control Panel** window to always be on top of all other windows, set the **EnableMainWindowNotAlwaysOnTop** property to **true**.

Tip: We recommend setting this property to **true** to maximize visibility of the LCS panel and camera control panel(s).

g. Save and close the **masterpanel1.exe.config** file.

4. Launch MasterPanel (C:\Cambotics\masterpanel1.exe).

Tip: To make the MasterPanel application more readily available, create a shortcut to the application, and place the shortcut on your desktop.

5. In the **CamBot Control Panel** window, tap the **Configure** button.

6. In the **Configuration** window, tap the **Engineering Screen** button.

7. In the **password** box, type the password, **foo**.

8. Tap **OK**

9. In the **Engineering Configuration** window, tap the **automation cam-switch following** button to turn it **off**.

10. Tap the **save changes and exit** button.

11. In the **Configuration** window, tap the **remote** button until it reads “**remote: Ross Video**”.

12. Tap the **save config settings** button.

13. Tap the **exit** button.

14. Minimize the **CamBot Control Panel** window, but do not close it.

Preparing the LCS Panel

By default, the LCS panel files are pre-installed on your LCS computer.

If you pre-configured the LCS panel on a different computer and saved the LCS panel files on a USB stick, you must transfer them to the LCS computer.

This section contains instructions for transferring saved LCS panel files, and instructions for adding the LCS panel to the DashBoard File Navigator for easy access.

To transfer saved LCS panel files to the LCS computer:

1. On the LCS computer, insert the USB stick that contains the saved LCS panel files.
2. Navigate to **Computer > OS (C)**, and then tap **OK**.
3. Rename the existing **LCS** folder to make it a backup of the LCS panel as originally installed.

For example, you might rename the folder “**LCS_backup**”.

4. On the USB stick, navigate to the folder that contains the **LCS** folder.
5. Copy the **LCS** folder from the USB stick to the **C:** folder.
6. When the transfer is complete, remove the USB stick.

To add the LCS panel to the DashBoard File Navigator:

1. On the LCS computer, start DashBoard.
2. From the **Views** menu, tap **File Navigator**.
3. On the **File Navigator** tab, tap the green + symbol.
The **Browse for Folder** dialog appears.
4. Navigate to the **LCS** folder located in **Computer > OS (C)**, and then tap **OK**.
5. In the **File Navigator** tree, expand the **LCS** folder to show the **LCS.grid** file.
6. To open the LCS panel anytime, double-tap the **LCS.grid** file.

The LCS panel will always be available from the DashBoard File Navigator.

Connecting Carbonite to Cameras, XPression, and the LCS

To set up Carbonite for the LCS:

1. Connect the cameras to inputs on the Carbonite frame, starting at **INPUT 1** and continuing with **INPUT 2**, **INPUT 3**, and so on.
Tip: If you already created cameras in the LCS panel and specified crosspoints for them, connect the actual cameras to the corresponding switcher inputs.
2. Connect XPression to **INPUTS 20** to **23** on the Carbonite frame:
 - Fill 1 — **INPUT 20**
 - Alpha 1 — **INPUT 21**
 - Fill 2 — **INPUT 22**
 - Alpha2 — **INPUT 23**
3. Connect the LCS computer **HDMI out** to **INPUT 24** on the Carbonite frame.
4. Connect the **SDI OUTPUT 01** on the Carbonite frame to the **SDI to DVI-D converter**, and then connect the converter to the secondary monitor.
5. Load the provided LCS switcher set file onto the Carbonite switcher panel.

For information about loading switcher sets, see the *Carbonite Operation Manual (4802DR-110)*.

Setting Up Communication Between Carbonite, XPression, and the LCS

To set up device communication:

1. Start DashBoard and open the LCS panel.
2. In the LCS panel, tap the **Config** button.

The **Legislative Control System Configuration** window appears.

3. On the **Devices** tab, specify the **Host IP** address, **Port**, and program ME (**PGM MLE**) for the **Carbonite Switcher**.

The screenshot shows the 'Devices' configuration window. It has a dark red background and a top navigation bar with tabs: General, Devices, Cameras, Representatives, Marks, Mic Systems, and Joystick. The 'Devices' tab is selected. Below the tabs, there's a title bar 'Devices'. The main area contains two sections. The first section is for 'Carbonite Switcher' and includes three input fields: 'Host' (10.0.2.235), 'Port' (7788), and 'PGM MLE' (MLE 2). The second section is for 'XPression CG' and includes two input fields: 'Host' (22.66.78.12) and 'Port' (7788). To the right of these fields is a note: 'NOTE: the Carbonite Data Source must also be updated'. At the bottom right, there is a 'Save Changes' button. At the bottom left, there is a 'Reload Data' button. At the bottom right, there are buttons for 'Seat Layout', 'Mark Layout', and 'Conf'.

4. Specify **Host IP** address and **Port** for the **XPression CG**.
5. Tap the **Save Changes** button.

Leave the LCS panel open for the next procedure.

Adding Carbonite as an LCS Data Source

To add Carbonite as an LCS data source:

1. In **DashBoard**, look at the **Tree View** to ensure that the Carbonite switcher appears in the tree.
2. With the LCS panel open, from DashBoard's **Edit** menu, tap **PanelBuilder Edit Mode** to enter **Edit Mode**.

Tip: When a panel is in **Edit Mode**, grid lines are visible over the entire panel.

3. In the **Edit Mode** toolbar, tap the **Data Sources** button.

The **Data Sources** dialog box appears.

4. In the **Data Sources** dialog box, tap the **Edit** button for a Carbonite switcher.

The **Select Device for Context** dialog box appears.

5. Select the Carbonite switcher from the **Select a device** list.

Tip: The switcher entry is within a frame entry, and appears as **Slot 0: Carbonite**.

6. Click **OK**.

A **Device Type Mismatch** message appears.

7. Click **Yes**.
8. Tap the **PanelBuilder Edit Mode** button to exit **Edit Mode**.

Leave the LCS panel open for the next procedure.

Establishing a Device Connection to the Joystick Server

This procedure applies only to systems that include a Ross Video joystick panel.

The MasterPanel software includes a joystick server component. You must establish a device connection in DashBoard to enable the LCS panel to use the Ross Video joystick panel.

To Establish a Device Connection to the Joystick Server:

1. Ensure that **MasterPanel** is running (**C:\Cambotics\masterpanel1.exe**).
2. In **DashBoard**, from the **File** menu, tap **New**, and then tap **TCP/IP openGear Frame**.
The **New TCP openGear Frame Connection** dialog box appears.
3. In the **IP Address** box, type **localhost**.
4. In the **Display Name** box, type a name for the node. For example, you might name it **JoystickServer**.
5. Tap **Finish**.

The new node appears in the tree. Because MasterPanel is running, the node icon includes a green dot.

Note the name of the joystick server node. You will need it for later configuration steps.

Leave the LCS panel open for the next procedure.

Adding the Joystick Server as an LCS Panel Data Source

This procedure applies only to systems that include a Ross Video joystick panel.

The joystick server appears as a node you created in the DashBoard device tree. You must add it as a data source in the LCS panel so the joystick can communicate with the LCS panel.

1. With the LCS panel open, from DashBoard's **Edit** menu, tap **PanelBuilder Edit Mode** to enter **Edit Mode**.

Tip: When a panel is in **Edit Mode**, grid lines are visible over the entire panel.

2. In the **Edit Mode** toolbar, tap the **Data Sources** button.

The **Data Sources** dialog box appears.

3. In the **Data Sources** dialog box, find the following **Tag** entry and click the associated **Edit** button:

abs [id=Joystick, name=Joystick]

The **Select Device for Context** dialog box appears.

4. In the **Select a device** list, expand the joystick server node.

Tip: You created and named the joystick server node in a previous procedure. For more information, see “**Establishing a Device Connection to the Joystick Server**” on page 4–6.

Note: if the node is not green, the MasterPanel application is not running. Start MasterPanel (**C:\Cambotics\masterpanel1.exe**).

5. Within the joystick server node, select **Local Joystick**, and then tap **OK**.
6. If a **Device Type Mismatch** dialog box appears, tap **Yes**.
7. In the **Data Sources** dialog box, tap **Ok**.

8. Tap the **PanelBuilder Edit Mode** button to exit **Edit Mode**.

Leave the LCS panel open for the next procedure.

Planning Shots and Assigning them to Marks

This section describes how to plan shots and how to assign shot numbers to marks in LCS configuration.

Planning Shots

An LCS implementation includes a large number of camera shots; usually several hundred. We recommend that you develop a strategy for keeping track of shots so you can easily assign them to marks in the LCS panel.

You can plan your shot numbers in advance by looking at your diagram of the legislative chamber to determine which cameras to use for each mark. If you create a worksheet listing mark names, cameras, shot numbers and shot names, it becomes easy to enter the data into LCS and to use the worksheet as a shot list when creating the actual shots. Examples of typical shot names include, “sitting”, “standing”, “close”, “far”, “tight”, and “wide”.

Each camera has its own collection of shots. To assign a shot to a mark, you need to know both the camera number and shot number.

Seat Layout view enables you to preview three shots from one camera, while a shot from a second camera is on-air. Shot lists for Seat Layout have up to six shots per mark.

Mark Layout view enables you to preview three shots from each of three cameras, while a shot from a fourth camera is on-air. Shot lists for Mark Layout have up to 12 shots per mark.

Tip: Some camera systems number shots starting at 0, and others starting at 1, as follows:

- Sony shot numbers start at 1.
- Panasonic shot numbers start at 0.
- CamBot shot numbers start at 0.

Assigning Shots to Marks

When you assign shots to marks in LCS, you are specifying which shots will be available for taking to on-air when the operator selects a mark or representative in the layout view.

To assign shots to marks:

1. Start DashBoard and open the LCS panel.
2. In the LCS panel, tap the **Config** button.

The **Legislative Control System Configuration** window appears.

3. On the **Marks** tab, tap the **Engineering** button.



The screenshot shows the 'Marks' configuration window in the LCS panel. It features a tabbed interface with 'Marks' selected. Below the tabs is an 'ADD' button and a table with columns for Mark Name, Representative, show X Pos, Y Pos, and various camera shot assignments (Cam1, Cam1Sh1-Cam1Sh3, Cam2, Cam2Sh1-Cam2Sh2, Cam2S).

Mark Name	Representative	show X Pos	Y Pos	Cam1	Cam1Sh1	Cam1Sh2	Cam1Sh3	Cam2	Cam2Sh1	Cam2Sh2	Cam2S	
ctr back 01	Alikhan Manji	<input checked="" type="checkbox"/>	218	70	6	1	2	3	4	1	2	3
ctr back 02	Amy Mason	<input checked="" type="checkbox"/>	321	70	6	4	5	6	4	4	5	6
ctr back 03	Ben Gatien	<input checked="" type="checkbox"/>	424	70	6	7	8	9	4	7	8	9
ctr back 04	Bob Loblaw	<input checked="" type="checkbox"/>	527	70	6	10	11	12	7	10	11	12
ctr back 05	Bob Ross	<input checked="" type="checkbox"/>	630	70	6	13	14	15	7	13	14	15
ctr back 06	Brian Olson	<input checked="" type="checkbox"/>	733	70	7	16	17	18	6	16	17	18

4. On the **Marks** tab, specify the camera and shots to use for each mark:
 - a. In the camera columns (**Cam1**, **Cam2**, **Cam3**, **Cam4**), specify the camera numbers to be used for the mark.

Note: Camera priority is from Cam1 to Cam4. Cam1 is the default camera. If Cam1 is unavailable, the LCS tries to use Cam2, and so on.
 - b. In the shot columns (**Cam1sh1**, **Cam1sh2**, **Cam1sh3**, **Cam2sh1**, and so on to **Cam4sh3**), specify the shot numbers to be used for the mark.

Note: For each camera, shot 1 (for example, **Cam3sh1**) is the default shot. The other two shots are available as alternatives.

IMPORTANT: Ensure that shot 1 is specified for each camera to be used for shooting the mark. For example, if using two cameras for the mark, specify shots for **Cam1sh1** and **Cam2sh1**. These “shot 1s” are the default shots for the cameras, and must be present for the system to work properly.
5. When you are finished assigning shots to marks, tap the **Save Changes** button.

Configuring Cameras and Creating Shots in Camera Control Panels

To configure cameras and create shots, you use a camera control panel that is separate from the LCS panel. There is one camera control panel for each type of camera in your system. For example, if your system uses only Sony cameras, you use the Sony camera control panel.

For information about how to configure cameras and create shots, see the chapter corresponding to your type(s) of cameras system(s):

- “**The CamBot Control Panel**” on page 5–1
- “**The Sony Control Panel**” on page 6–1
- “**The Panasonic Control Panel**” on page 7–1

The remaining tasks in the commissioning process are described in the camera control panel chapters.

Upgrading LCS Panel Software

This section describes how to upgrade LCS panel software while preserving data specific to your LCS panel(s).

The new LCS panel software is delivered as a compressed zip archive file.

Note: If the LCS is used for multiple types of events, there are multiple sets of LCS panel files, each of which must be upgraded.

To upgrade the LCS panel:

1. On the LCS computer, create a backup copy of your current LCS installation folder (typically, **C:\LCS**).
2. Open the new **LCS zip file** to display the contents of the archive.
3. Copy the **LCS.grid** file and the **LCS.xml** file to **c:\LCS**. Agree to replace the destination files when prompted.
4. Copy the folder **\LCS\Images\Photos** to **c:\LCS\Images\Panel**. Agree to replace the destination files when prompted.

The CamBot Control Panel

The CamBot Control Panel is a DashBoard panel used to configure CamBot units and create shots. Camera control panels interact with camera systems and the LCS panel to control cameras.

This chapter contains information about the camera control interface, and how to use it to commission cameras and create shots for a Legislative Control System (LCS).

The remaining LCS commissioning tasks are as follows:

- “**Installing the Camera Control Panel Files**” on page 5–1
- “**Launching the Camera Control Panel**” on page 5–1
- “**Adding the Joystick Server as a Data Source**” on page 5–2
- “**Configuring Cameras**” on page 5–2
- “**Creating, Storing, and Recalling Shots**” on page 5–3

The section, “**User Interface Reference**” on page 5–4 describes the controls available in the camera control panel.

Note: Each LCS implementation includes one or more camera control panels. There is one camera control panel for each type of camera in your system (Sony, Panasonic, CamBot). You must configure all cameras in your system, using the appropriate camera control panel for each type.

IMPORTANT: The LCS does not save CamBot shots in a file. CamBot Shots are stored on the CamBot robotics heads. You can save the shots from one CamBot head or all CamBot heads in a shot list file. For more information, see the *CamBot Control System User Guide (5100DR-503)*.

Installing the Camera Control Panel Files

The camera control panel is a DashBoard panel. DashBoard must be installed to run the camera control panel. DashBoard is available as a free download from www.rossvideo.com.

To install the camera control panel:

1. Ensure that DashBoard is installed.
2. Open the camera control panel zip file and then extract the **CamBotCamera** folder into the **C:** directory.

Launching the Camera Control Panel

Add the camera control panel to the DashBoard File Navigator, to make it readily available from DashBoard.

To add the camera control panel to DashBoard File Navigator:

1. Start DashBoard.
2. From the **Views** menu, tap **File Navigator**.
3. On the **File Navigator** tab, tap the green + symbol.
The **Browse for Folder** dialog appears.
4. Navigate to the **CamBotCamera** folder located in **Computer > OS (C)**, and then tap **OK**.
5. In the **File Navigator** tree, expand the **CamBotCamera** folder to show the **CamBot.grid** file.
6. To open the camera control panel anytime, double-tap the **CamBot.grid** file.

The camera control panel will always be available from the DashBoard File Navigator.

Adding the Joystick Server as a Data Source

This procedure applies only to systems that include a Ross Video joystick panel.

The joystick server appears as a node you created in the DashBoard device tree. You must add it as a data source in the camera control panel so the joystick can communicate with the LCS panel.

To add the joystick server as a data source:

1. With the camera control panel open, from DashBoard's **Edit** menu, tap **PanelBuilder Edit Mode** to enter **Edit Mode**.

Tip: When a panel is in **Edit Mode**, grid lines are visible over the entire panel.

2. In the **Edit Mode** toolbar, tap the **Data Sources** button.

The **Data Sources** dialog box appears.

3. In the **Data Sources** dialog box, find the following **Tag** entry and click the associated **Edit** button:

abs [id=Joystick, name=Joystick]

The **Select Device for Context** dialog box appears.

4. In the **Select a device** list, tap the joystick server node.

Tip: You created and named the joystick server node in a previous procedure. For more information, see “**Establishing a Device Connection to the Joystick Server**” on page 4–6.

Note: if the node is not green, the MasterPanel application is not running. Start MasterPanel (C:\Cambotics\masterpanel1.exe).

5. Within the joystick server node, select **Local Joystick**, and then tap **OK**.

6. If a **Device Type Mismatch** dialog box appears, tap **Yes**.

7. In the **Data Sources** dialog box, tap **Ok**.

8. Tap the **PanelBuilder Edit Mode** button to exit **Edit Mode**.

Leave the LCS panel open for the next procedure.

Configuring Cameras

This section describes how to configure cameras.

For more detailed information about specific configuration settings, see “**Camera Configuration Window**” on page 5–4.

To configure a camera:

1. In the camera control panel, tap the **Config** button.

2. In the **Master Panel IP** box, type the IP address of the computer running the MasterPanel application.

This box records the IP address of the computer running the MasterPanel application. For LCS applications, the software runs on the same computer as the DashBoard LCS software (IP = **localhost**).

3. Tap the **Refresh Master Panel Connection** button to ensure the connection is active.

Tip: The MasterPanel application must be running whenever you use the LCS. MasterPanel is on the DashBoard LCS computer at C:\Cambotics\masterpanel1.exe.

4. If any of the cameras are mounted in an inverted position, on the **Cameras** tab, select the **Invert Horizontal Axis** and **Invert Vertical Axis** check boxes as required.

Tip: Invert camera axes as required to make all cameras behave consistently when manipulated by any controls, including joysticks, camera controls, and LCS panels.

5. On the **Preset Names** tab, name the presets (shots) for each camera. These names will appear in the LCS panel.
Tip: Within the **Preset Names** tab there is a tab for each camera.
6. When you are finished naming your shots, tap the **Send Camera Preset Names** button. This makes the names available to the LCS.

Creating, Storing, and Recalling Shots

An LCS implementation typically includes several hundred camera shots. Creating and storing these shots can be tedious, but the task is easy if the shots are planned in advance. This section assumes that you have a list of shots to be created for each camera, and that the shot numbers have already been assigned to marks in the LCS panel configuration interface. For more information, see “**Assigning Shots to Marks**” on page 4–7.

This section summarizes how to create, store, and recall shots.

For more detailed information about specific controls, see “**Camera Control Window**” on page 5–6.

To create and store a shot:

1. In the camera control panel, tap the **Controls** button.
2. Tap a camera button to control that camera.
Tip: The ten camera buttons are in a row along the top of the window.
3. If you want to move the camera, you can use the Ross Video joystick panel, or the **PTZ Controls** window:
 - To use the Ross Video joystick panel:
 - › **Pan** — Push the right joystick right and left.
 - › **Tilt** — Push the right joystick forward and backward.
 - › **Zoom** — Rotate the right joystick.
 - › **Focus** — Turn the **FOCUS** knob.
 - To use the **PTZ Controls** window, tap the **PTZ Controls** button, and then adjust the following as required:
 - › **Pan and Tilt** — Tap the **Positioner** button to choose between **PAN / TILT** sliders or the pan/tilt positioner, and then move the camera.
 - › **Zoom** — Tap and drag the **ZOOM** slider handle to adjust the zoom.
 - › **Focus** — Tap and drag the **FOCUS** slider handle to adjust the focus.
 - › **Iris** — The LCS does not control iris on CamBot heads.
4. Tap the **Store/Recall Shots** button.
5. Tap the **Shot** button for the shot number you want to store.

Tip: If you want to store a shot higher than 99, use the Shot Selection keypad to specify the shot number, instead of tapping a **Shot** button.

IMPORTANT: The LCS does not save CamBot shots in a file. CamBot Shots are stored on the CamBot robotics heads. You can save the shots from one CamBot head or all CamBot heads in a shot list file. For more information, see the *CamBot Control System User Guide (5100DR-503)*.

6. Continue creating and storing shots until all required shots exist for all cameras in your system.

Note: If your LCS setup includes multiple types of cameras (i.e. Sony and CamBot), you must use the corresponding camera control panel to configure each type of camera, and to create shots for them. For more information, see the chapter corresponding to the camera type(s).

User Interface Reference

This section describes the controls available in the CamBot camera control panel.

The camera control panel consists of two interfaces:

- **Camera Configuration (Config) Window** — Enables you to configure camera settings such as camera names, IP addresses, and preset (shot) names. For more information, see “**Camera Configuration Window**” on page 5–4.
- **Camera Control (Controls) Window** — Enables you to operate cameras. You can move cameras, and store and recall shots. For more information, see “**Camera Control Window**” on page 5–6.

Camera Configuration Window

The camera configuration window enables you to configure camera settings such as camera names, IP addresses, and preset (shot) names.

To access the camera configuration window:


- Tap the **Config** button.

The **Config** window includes the following tabs:

- “**Cameras Tab**” on page 5–4
- “**Preset Names Tab**” on page 5–6

Cameras Tab

Figure 5.1 shows the **Cameras** tab.

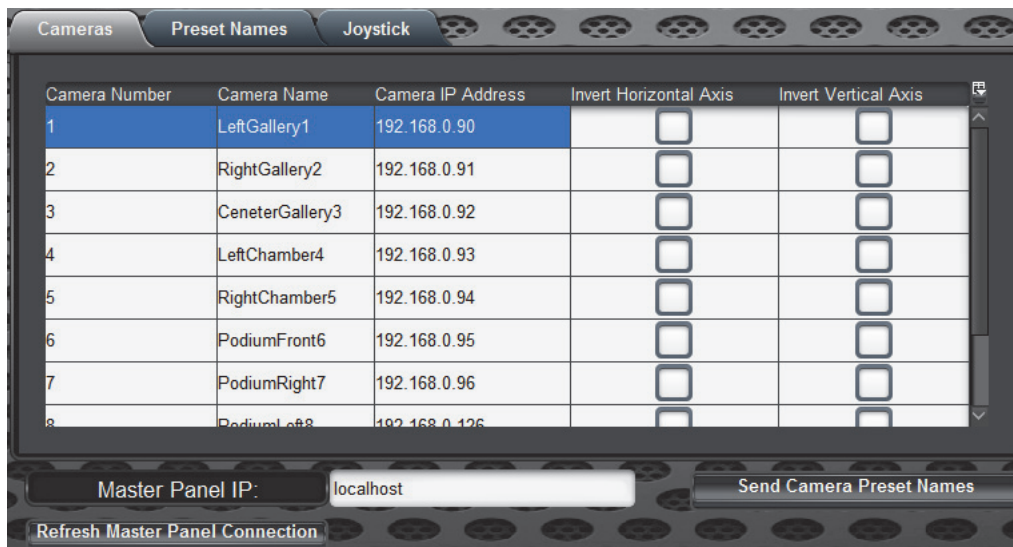

Camera Number	Camera Name	Camera IP Address	Invert Horizontal Axis	Invert Vertical Axis
1	LeftGallery1	192.168.0.90	<input type="checkbox"/>	<input type="checkbox"/>
2	RightGallery2	192.168.0.91	<input type="checkbox"/>	<input type="checkbox"/>
3	CeneterGallery3	192.168.0.92	<input type="checkbox"/>	<input type="checkbox"/>
4	LeftChamber4	192.168.0.93	<input type="checkbox"/>	<input type="checkbox"/>
5	RightChamber5	192.168.0.94	<input type="checkbox"/>	<input type="checkbox"/>
6	PodiumFront6	192.168.0.95	<input type="checkbox"/>	<input type="checkbox"/>
7	PodiumRight7	192.168.0.96	<input type="checkbox"/>	<input type="checkbox"/>
8	PodiumLeft8	192.168.0.126	<input type="checkbox"/>	<input type="checkbox"/>

Master Panel IP: localhost Send Camera Preset Names

Refresh Master Panel Connection

Figure 5.1 Cameras Tab

The **Cameras** tab includes the following settings and buttons:

Setting or Button	Description
Camera Number	<p>The number of the camera being controlled. This is not editable. Each row in the table represents one camera.</p> <p>IMPORTANT: If you are configuring cameras for use in a Ross Video Legislative Control System (LCS) that includes more than one type of camera (CamBot, Sony, etc), you must ensure that each camera in the system has a unique camera number. For example, if your system includes five CamBot cameras and five Sony cameras, you could set up the CamBot cameras as numbers 1 to 5, and the Sony cameras as numbers 6 to 10. Each type of camera is configured on a separate camera control panel. For example, if you have Sony and CamBot cameras, there is one camera control panel for Sony, and one for CamBot. Additionally, the camera numbers in the camera control panels must correspond with the Camera Key numbers in the LCS configuration (Config interface, Cameras tab).</p>
Camera Name	Specify a meaningful name for the camera.
Camera IP Address	Displays the IP addresses of the cameras.
Invert Horizontal Axis	<p>Reverses the direction the camera pans when manipulated by the joystick or the Camera Control window.</p> <p>Use this option if the camera is mounted in an inverted position.</p>
Invert Vertical Axis	<p>Reverses the direction the camera tilts when manipulated by the joystick or the Camera Control window.</p> <p>Use this option if the camera is mounted in an inverted position.</p>
Master Panel IP	<p>Specify the IP address of the computer running the MasterPanel application.</p> <p>For LCS applications, MasterPanel typically runs on the same computer as DashBoard (IP = localhost).</p>
Send Camera Preset Names	<p>Tap this button to send the names of presets (shots) to other inter-connected DashBoard panels, such as a Legislative Control System (LCS) panel. Sending the preset names enables the other panel(s) to display them.</p> <p>Tip: Preset names are defined on the Preset Names tab.</p>
Refresh Master Panel Connection	Refreshes the connection to the MasterPanel application. Enables you to establish a connection to cameras that have been added or that have had their IP addresses changed in the MasterPanel devices.cam file.

Preset Names Tab

Figure 5.2 shows the **Preset Names** tab.



Figure 5.2 Preset Names Tab

The **Preset Names** tab includes the following settings and buttons:

Setting or Button	Description
Camera tabs	Each Camera tab corresponds to a camera in the system. Each camera has a separate list of presets. Tap a tab to set preset names for shots on a different camera.
Preset Names	Specify a meaningful name for the preset (also known as a shot). Examples of typical shot names include, “sitting”, “standing”, “close”, “far”, “tight”, and “wide”.
Master Panel IP	Specify the IP address of the computer running the MasterPanel application. For LCS applications, MasterPanel typically runs on the same computer as DashBoard (IP = localhost).
Send Camera Preset Names	Tap this button to send the names of presets (shots) to other inter-connected DashBoard panels, such as a Legislative Control System (LCS) panel. Sending the preset names enables the other panel(s) to display them.
Refresh Master Panel Connection	Refreshes the connection to the MasterPanel application. Enables you to establish a connection to cameras that have been added or that have had their IP addresses changed in the MasterPanel devices.cam file.

Camera Control Window

The camera control window enables you to operate cameras. You can move cameras, and store and recall shots.

To access the camera control interface:

- Tap the **Controls** button.

The **Controls** interface includes the following windows:

- “**Store/Recall Shots Window**” on page 5–7
- “**PTZ Controls Window**” on page 5–9

Store/Recall Shots Window

The **Store/Recall Shots** window enables you to store camera positions as shots for future recall. It also enables you to recall those shots. The **Store/Recall Shots** window is used as an operator interface for controlling cameras during a presentation.

To access the Store/Recall Shots window:

- From the camera control interface, tap the **Store/Recall Shots** button.

Figure 5.3 shows the **Store/Recall Shots** window.

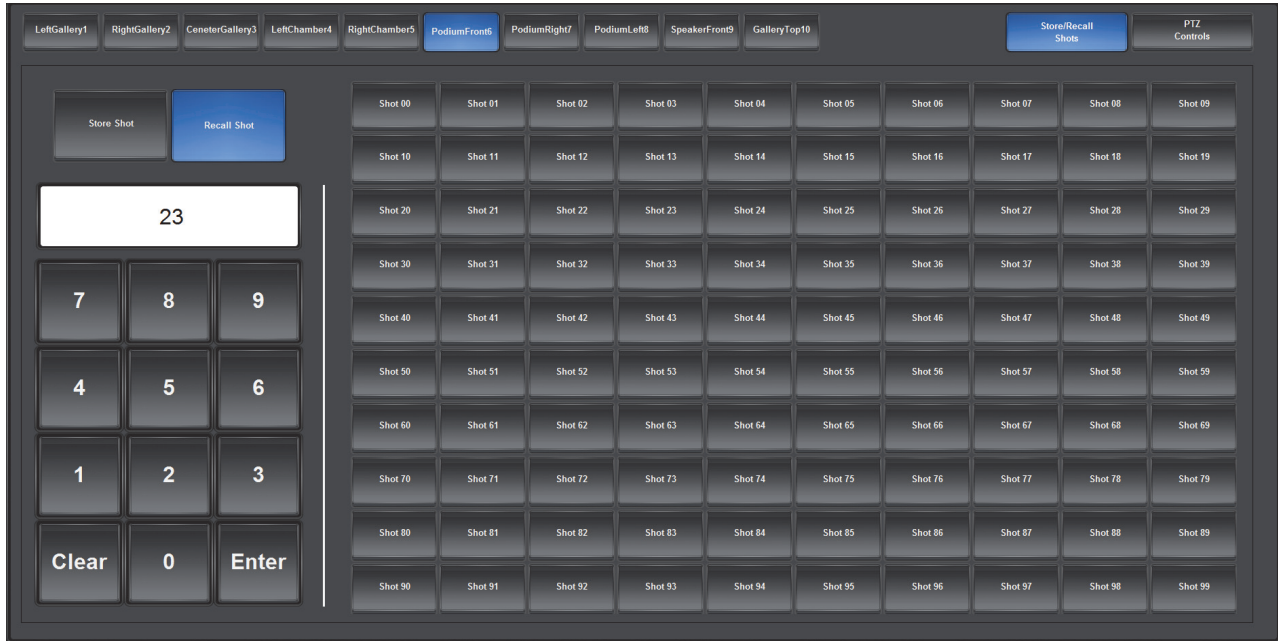


Figure 5.3 Store/Recall Shots Window

The **Store/Recall Shots** window includes the following settings and buttons:

Setting or Button	Description
Camera buttons	The row of ten buttons across the top of the Store/Recall Shots window includes one button per camera. Tap a button to select the camera to which you want to store shots, or from which you want to recall them.
Store Shot button	Tap the button to switch to Store Shot mode. In Store Shot mode, you can save the current camera position as a shot for future recall. IMPORTANT: The LCS does not save CamBot shots in a file. CamBot Shots are stored on the CamBot robotics heads. You can save the shots from one CamBot head or all CamBot heads in a shot list file. For more information, see the <i>CamBot Control System User Guide (5100DR-503)</i> .
Recall Shot button	Tap the button to switch to Recall Shot mode. In Recall Shot mode, you can recall saved shots for the current camera. Recall Shot mode is used for camera operation.

Setting or Button	Description
Shot Selection keypad	<p>Type a shot number and then press the Enter button on the keypad to store or recall a shot, depending on the current mode.</p> <p>Alternatively, you can type a number in the box above the keypad and then press the Enter button on the keypad.</p> <p>Tip: The Shot buttons can also be used to select a shot for storage or recall. There are 100 Shot buttons, numbered 00 to 99. If you want to store or recall a shot higher than 99, use the Shot Selection keypad.</p>
Shot buttons	<p>Tap a Shot button to store or recall a shot, depending on the current mode.</p> <p>Shot buttons are used for camera operation.</p> <p>Tip: Be aware of the current mode (Store Shot or Recall Shot) before you tap a Shot button. If you are in Recall Shot mode and tap a Shot button, the current camera position is stored as that shot.</p> <p>Tip: CamBot robotic heads can store up to 400 shots each. The camera control panel has 100 Shot buttons, numbered 00 to 99. If you want to store or recall a shot higher than 99, use the Shot Selection keypad.</p> <p>IMPORTANT: The LCS does not save CamBot shots in a file. CamBot Shots are stored on the CamBot robotics heads. You can save the shots from one CamBot head or all CamBot heads in a shot list file. For more information, see the <i>CamBot Control System User Guide (5100DR-503)</i>.</p>

PTZ Controls Window

The **PTZ Controls** window enables you to manually adjust the position of the currently-selected camera. You can move cameras during a presentation, or move them into position to store a shot.

To access the PTZ Controls window:

- From the camera control interface, tap the **PTZ Controls** button.

Figure 5.4 shows the **PTZ Controls** window.

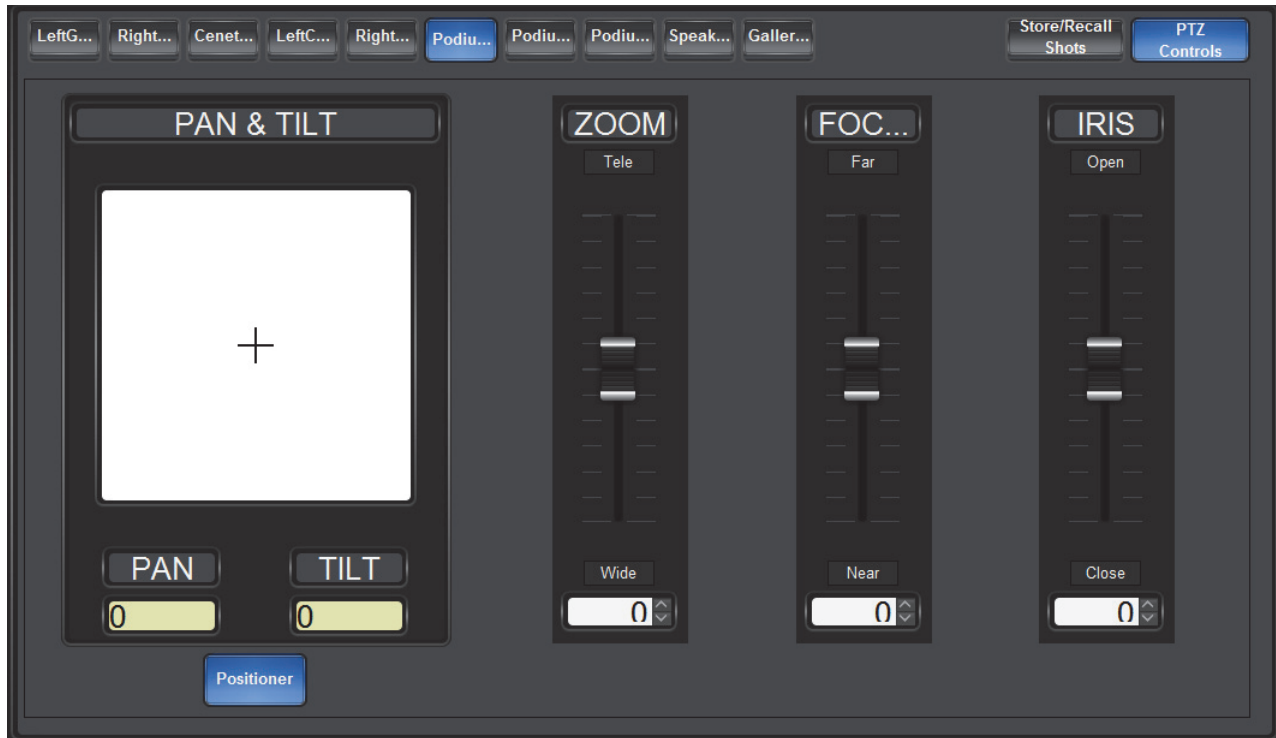


Figure 5.4 PTZ Controls Window (showing Pan/Tilt positioner)

The **PTZ Controls** window includes the following settings and buttons:


Setting or Button	Description
Camera buttons	The row of ten buttons across the top of the PTZ Controls window includes one button per camera. Tap a button to select which camera you want to move.
Positioner button	Switches between interfaces for adjusting pan and tilt positions: <ul style="list-style-type: none"> • PAN and TILT sliders — enable you to adjust pan and tilt individually. • PAN & TILT Positioner — enables you to adjust pan and tilt simultaneously. 
PAN and TILT sliders	Tap and drag the PAN or TILT slider handles to pan or tilt the camera. Alternatively, you can type a value in the box below the slider, or use the up/down arrows beside the box to select a value. Higher pan values pan right. Higher tilt values tilt upwards. Pan and tilt slider values are relative, not absolute. When you release the slider, the value shown returns to zero.
PAN & TILT Positioner	Tap and drag the cross-hairs within the white box until the camera is in the desired pan/tilt position. Positioner values are relative, not absolute. When you release the cross-hairs, they return to the center and the values return to 0 .
ZOOM slider	Tap and drag the ZOOM slider handle up or down to zoom the lens. Alternatively, you can type a value in the box below the slider, or use the up/down arrows beside the box to select a value. Higher values are towards telephoto, and lower values are towards wide. Zoom slider values are relative, not absolute. When you release the slider, the value shown returns to 0 .
FOCUS slider	Tap and drag the FOCUS slider handle up or down to focus the lens manually. Alternatively, you can type a value in the box below the slider, or use the up/down arrows beside the box to select a value. Higher values are towards far focus, and lower values are towards near focus. Focus slider values are relative, not absolute. When you release the slider, the value shown returns to 0 .

Figure 5.5 Pan/Tilt Sliders (left) and Pan/Tilt Positioner (Right)

The Sony Control Panel

The Sony camera control panel is a DashBoard panel that enables you to configure and control up to ten Sony robotic cameras. You can control cameras manually, store and recall shots, and adjust shading controls.

This chapter contains information about the Sony camera control interface, and how to use it to commission cameras and create shots for a Legislative Control System (LCS).

The remaining LCS commissioning tasks are as follows:

- “**Installing the Camera Control Panel Files**” on page 6–1
- “**Launching the Camera Control Panel**” on page 6–1
- “**Adding the Joystick Server as a Data Source**” on page 6–2
- “**Configuring Cameras**” on page 6–2
- “**Creating, Storing, and Recalling Shots**” on page 6–3

The section, “**User Interface Reference**” on page 6–4 describes the controls available in the camera control panel.

Note: Each LCS implementation includes one or more camera control panels. There is one camera control panel for each type of camera in your system (Sony, Panasonic, CamBot). You must configure all cameras in your system, using the appropriate camera control panel for each type.

Installing the Camera Control Panel Files

The camera control panel is a DashBoard panel. DashBoard must be installed to run the camera control panel. DashBoard is available as a free download from www.rossvideo.com.

To install the camera control panel:

1. Ensure that DashBoard is installed.
2. Open the camera control panel zip file and then extract the **Sony** folder into the C:\ directory.

Launching the Camera Control Panel

Add the camera control panel to the DashBoard File Navigator, to make it readily available from DashBoard.

To add the camera control panel to DashBoard File Navigator:

1. Start DashBoard.
2. From the **Views** menu, tap **File Navigator**.
3. On the **File Navigator** tab, tap the green + symbol.
The **Browse for Folder** dialog appears.
4. Navigate to the **Sony BRC-900** folder located in **Computer > OS (C)**, and then tap **OK**.
5. In the **File Navigator** tree, expand the **Sony BRC-900** folder to show the **SonyCamera.grid** file.
6. To open the camera control panel anytime, double-tap the **SonyCamera.grid** file.

The camera control panel will always be available from the DashBoard File Navigator.

Adding the Joystick Server as a Data Source

This procedure applies only to systems that include a Ross Video joystick panel.

The joystick server appears as a node you created in the DashBoard device tree. You must add it as a data source in the camera control panel so the joystick can communicate with the LCS panel.

To add the joystick server as a data source:

1. With the camera control panel open, from DashBoard's **Edit** menu, tap **PanelBuilder Edit Mode** to enter **Edit Mode**.

Tip: When a panel is in **Edit Mode**, grid lines are visible over the entire panel.

2. In the **Edit Mode** toolbar, tap the **Data Sources** button.

The **Data Sources** dialog box appears.

3. In the **Data Sources** dialog box, find the following **Tag** entry and click the associated **Edit** button:

abs [id=Joystick, name=Joystick]

The **Select Device for Context** dialog box appears.

4. In the **Select a device** list, tap the joystick server node.

Tip: You created and named the joystick server node in a previous procedure. For more information, see “**Establishing a Device Connection to the Joystick Server**” on page 4–6.

Note: if the node is not green, the MasterPanel application is not running. Start MasterPanel (C:\Cambotics\masterpanel1.exe).

5. Within the joystick server node, select **Local Joystick**, and then tap **OK**.

6. If a **Device Type Mismatch** dialog box appears, tap **Yes**.

7. In the **Data Sources** dialog box, tap **Ok**.

8. Tap the **PanelBuilder Edit Mode** button to exit **Edit Mode**.

Leave the LCS panel open for the next procedure.

Configuring Cameras

This section describes how to configure cameras.

For more detailed information about specific configuration settings, see “**Camera Configuration Window**” on page 6–4.

To configure a camera:

1. In the camera control panel, tap the **Config** button.
2. On the **Cameras** tab, specify names and IP addresses for the Sony cameras.

IMPORTANT: If you are configuring cameras for use in a Ross Video Legislative Control System (LCS) that includes more than one type of camera (Panasonic, Sony, CamBot), you must ensure that each camera in the system has a unique camera number. For example, if your system includes five Sony cameras and five CamBot cameras, you might number the Sony cameras as 1, 2, 3, 7, and 9, and number the CamBot cameras as 4, 5, 6, 8, and 10. The camera numbers you assign here must correspond with the **Camera Key** numbers in the LCS panel configuration (**Config** interface, **Cameras** tab).

3. If any of the cameras are mounted in an inverted position, select the **Invert Horizontal Axis** and **Invert Vertical Axis** check boxes as required.

Tip: Invert camera axes as required to make all cameras behave consistently when manipulated by any controls, including the Ross Video joystick panel, camera control panels, and LCS panels.

4. On the **Preset Names** tab, name the presets (shots) for each camera. These names will appear in the LCS panel.
Tip: Within the **Preset Names** tab there is a tab for each camera.
5. When you are finished naming your shots, tap the **Send Shot Names** button. This makes the names available to the LCS.
6. If you want to adjust camera shading and other selected controls, tap the **Controls** button, then tap the **Shading Controls** button, and then adjust the following as required:
 - **Exposure** — Choose an exposure mode:
 - › **Full Auto** enables automatic exposure.
 - › **Manual** enables you to manually set the Shutter Speed and Gain.
 - › **Shutter Priority** enables you to manually set the Shutter Speed, but not the Gain.
 - › **Iris Priority** enables the iris to determine exposure.
 - **Shutter Speed** — Select a shutter speed.
Tip: Shutter Speed is available only if Exposure is set to Manual or Shutter Priority.
 - **Gain** — Specify a gain value (-3, or 0 to 24).
Tip: Gain is available only if **Exposure** is set to **Manual**.
 - **White Balance** — Select a white balance option:
 - › **Auto** enables automatic white balance.
 - › **Indoor** sets white balance levels for typical indoor shooting conditions.
 - › **Outdoor** sets white balance levels for typical outdoor shooting conditions.
 - › **One Push** enables you to perform a white balance operation on demand, using the **One Push** button.
 - › **Manual** enables manual white balance. It also enables you to set red gain and blue gain values.
Note: White balance settings are retained in presets, and are recalled when presets are recalled.
 - **One Push WB** — Performs a white balance operation if **White Balance** is set to **Auto** or to **One Push**.
 - **R.Gain** — Specify a red gain value (-128 to 127).
Tip: Red gain is available only if **White Balance** is set to **Manual**.
 - **B.Gain** — Specify a blue gain value (-128 to 127).
Tip: Blue gain is available only if **White Balance** is set to **Manual**.

Note: When you store a shot, shading controls are saved as part of the shot.
7. If you want to turn the camera **ON** or **OFF**, tap the **Power** button until it shows the desired state (**Power ON** or **Power OFF**).

Creating, Storing, and Recalling Shots

An LCS implementation typically includes several hundred camera shots. Creating and storing these shots can be tedious, but the task is easy if the shots are planned in advance. This section assumes that you have a list of shots to be created for each camera, and that the shot numbers have already been assigned to marks in the LCS panel configuration interface. For more information, see “**Assigning Shots to Marks**” on page 4–7.

This section summarizes how to create, store, and recall shots.

For more detailed information about specific controls, see “**Camera Control Window**” on page 6–7.

To create and store a shot:

1. In the camera control panel, tap the **Controls** button.
2. Tap a camera button to control that camera.

Tip: The ten camera buttons are in a row along the top of the window.

3. If you want to move the camera, you can use the Ross Video joystick panel, or the Camera Control window:
 - To use the Ross Video joystick panel:
 - › **Pan** — Push the right joystick right and left.
 - › **Tilt** — Push the right joystick forward and backward.
 - › **Zoom** — Rotate the right joystick.
 - › **Focus** — Turn the **FOCUS** knob.
 - To use the Camera Control window, tap the **PTZ Controls** button, and then adjust the following as required:
 - › **Pan and Tilt** — Tap the **Positioner** button to choose between **PAN** and **TILT** sliders or the **PAN & TILT** positioner, and then move the camera.
 - › **Zoom** — Tap and drag the **ZOOM** slider handle to adjust the zoom.
 - › **Focus** — Tap and drag the **FOCUS** slider handle to adjust the focus.

Note: You cannot adjust the focus if **Auto Focus** is **ON**. Unfortunately, the Auto Focus status may be shown incorrectly because Sony cameras cannot communicate their focus status to the LCS panel. Before you adjust the focus, tap the **Auto Focus** button at least once until the button says **Auto Focus OFF**.
 - › **Iris** — Tap and drag the **IRIS** slider handle to adjust the iris.

Note: You cannot adjust the iris if **Auto Iris** is **ON**. Unfortunately, the Auto Iris status and iris value may be shown incorrectly because Sony cameras cannot communicate their iris status to the LCS panel. Before you adjust the iris, tap the **Auto Iris** button at least once until the button says **Auto Iris OFF**.
4. Tap the **Store/Recall Shots** button.
5. Tap the **Shot** button for the shot number you want to store.

Tip: If you want to store a shot higher than 100, use the Shot Selection keypad to specify the shot number, instead of tapping a **Shot** button.
6. Continue creating and storing shots until all required shots exist for all cameras in your system.

Note: If your LCS setup includes multiple types of cameras (i.e. Sony and Panasonic), you must use the corresponding camera control panel to configure each type of camera, and to create shots for them. For more information, see the chapter corresponding to the camera type(s).

User Interface Reference

This section describes the controls available in the Sony camera control panel.

The camera control panel consists of two interfaces:

- **Camera Configuration (Config) Window** — Enables you to configure camera settings such as camera names, IP addresses, and preset (shot) names. For more information, see “**Camera Configuration Window**” on page 6–4.
- **Camera Control (Controls) Window** — Enables you to operate cameras. You can move cameras, store and recall shots, and adjust shading controls. For more information, see “**Camera Control Window**” on page 6–7.

Camera Configuration Window

The camera configuration window enables you to configure camera settings such as camera names, IP addresses, and preset (shot) names.

To access the camera configuration window:

- Tap the **Config** button.

The **Config** window includes the following tabs:

- “**Cameras Tab**” on page 6–5
- “**Preset Names Tab**” on page 6–6

Cameras Tab

Figure 6.1 shows the **Cameras** tab.

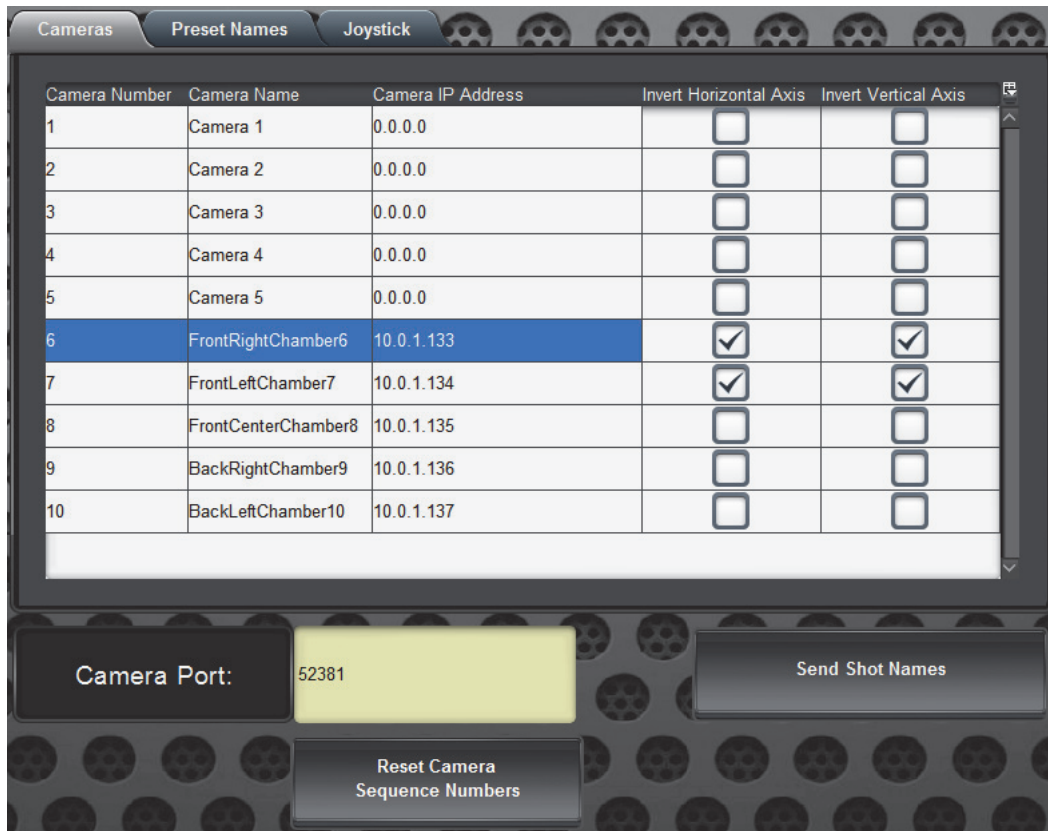


Figure 6.1 Cameras Tab

The **Cameras** tab includes the following settings and buttons:

Setting or Button	Description
Camera Number	The number of the camera being controlled. This is not editable. Each row in the table represents one camera. IMPORTANT: If you are configuring cameras for use in a Ross Video Legislative Control System (LCS) that includes more than one type of camera (Panasonic, Sony, CamBot), you must ensure that each camera in the system has a unique camera number. For example, if your system includes five Sony cameras and five CamBot cameras, you might number the Sony cameras as 1, 2, 3, 7, and 9, and number the CamBot cameras as 4, 5, 6, 8, and 10. The camera numbers you assign here must correspond with the Camera Key numbers in the LCS panel configuration (Config interface, Cameras tab).
Camera Name	Specify a meaningful name for the camera.
Camera IP Address	Specify the IP address of the camera. Every camera must have a unique IP address. IMPORTANT: If you are configuring cameras for use in a Ross Video Legislative Control System (LCS) that includes more than one type of camera (Panasonic, Sony, CamBot), you must ensure that all camera IP addresses in the system are unique.
Invert Horizontal Axis	Reverses the direction the camera pans when manipulated by a joystick or by the Camera Control window. Use this option if the camera is mounted in an inverted position.

Setting or Button	Description
Invert Vertical Axis	Reverses the direction the camera tilts when manipulated by a joystick or by the Camera Control window. Use this option if the camera is mounted in an inverted position.
Camera Port	Shows the computer port over which the cameras communicate. The camera port is not configurable.
Send Shot Names	Tap this button to send the names of presets (shots) to other inter-connected DashBoard panels, such as a Legislative Control System (LCS) panel. Sending the preset names enables the other panel(s) to display them. Tip: Preset names are defined on the Preset Names tab.
Reset Camera Sequence Numbers	This button resets addressing numbers on the Sony cameras, to ensure that the LCS panel has control of the cameras. The numbers can become mismatched between the camera and the LCS panel if another system takes control of one or more cameras.

Preset Names Tab

Figure 6.2 shows the **Preset Names** tab.

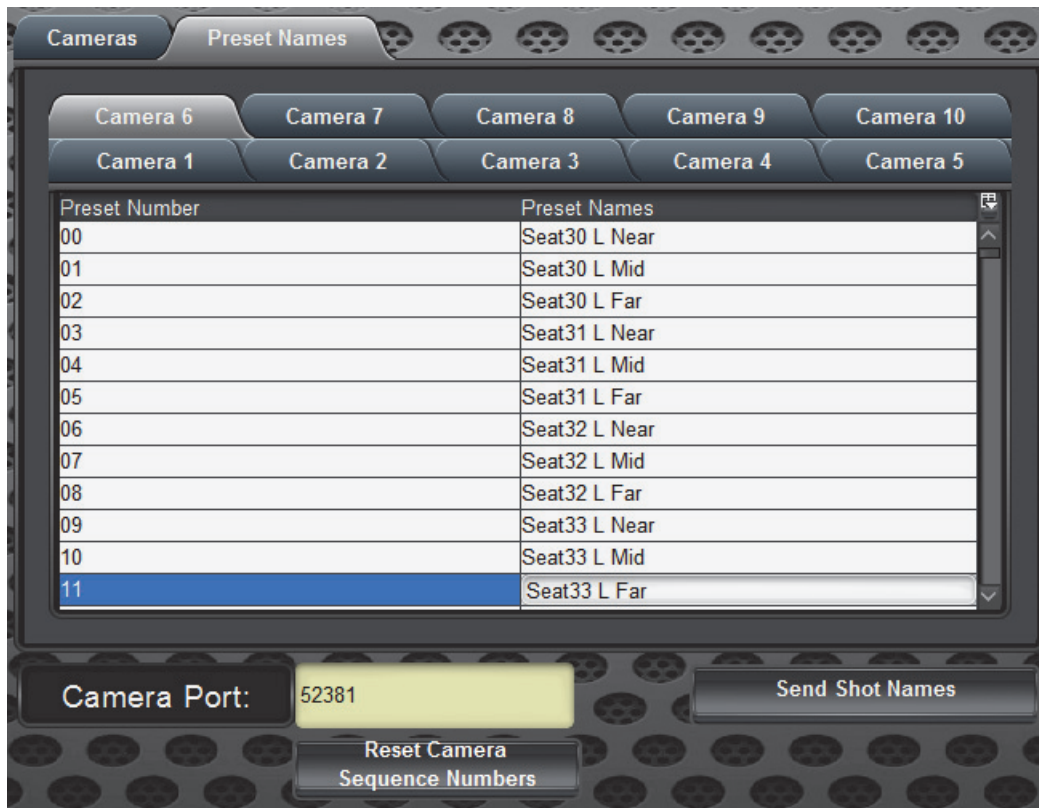


Figure 6.2 Preset Names Tab

The **Preset Names** tab includes the following settings and buttons:

Setting or Button	Description
Camera tabs	Each Camera tab corresponds to a camera in the system. Each camera has a separate list of presets. Tap a tab to set preset names for shots on a different camera.
Preset Names	Specify a meaningful name for the preset (also known as a shot). Examples of typical shot names include, “sitting”, “standing”, “close”, “far”, “tight”, and “wide”.

Setting or Button	Description
Camera Port	Shows the computer port over which the cameras communicate. The camera port is not configurable.
Send Shot Names	Tap this button to send the names of presets (shots) to other inter-connected DashBoard panels, such as a Legislative Control System (LCS) panel. Sending the preset names enables the other panel(s) to display them.
Reset Camera Sequence Numbers	This button resets addressing numbers on the Sony cameras, to ensure that the LCS panel has control of the cameras. The numbers can become mismatched between the camera and the LCS panel if another system takes control of one or more cameras.

Camera Control Window

The camera control window enables you to operate cameras. You can move cameras, store and recall shots, and adjust shading controls.

To access the camera control interface:

- Tap the **Controls** button.

The **Controls** interface includes the following windows:

- “**Store/Recall Shots Window**” on page 6–7
- “**PTZ Controls Window**” on page 6–9
- “**Shading Controls Window**” on page 6–12

Store/Recall Shots Window

The **Store/Recall Shots** window enables you to store camera positions as shots for future recall. It also enables you to recall those shots. The **Store/Recall Shots** window is used as an operator interface for controlling cameras during a presentation.

To access the Store/Recall Shots window:

- From the camera control interface, tap the **Store/Recall Shots** button.

Figure 6.3 shows the **Store/Recall Shots** window.

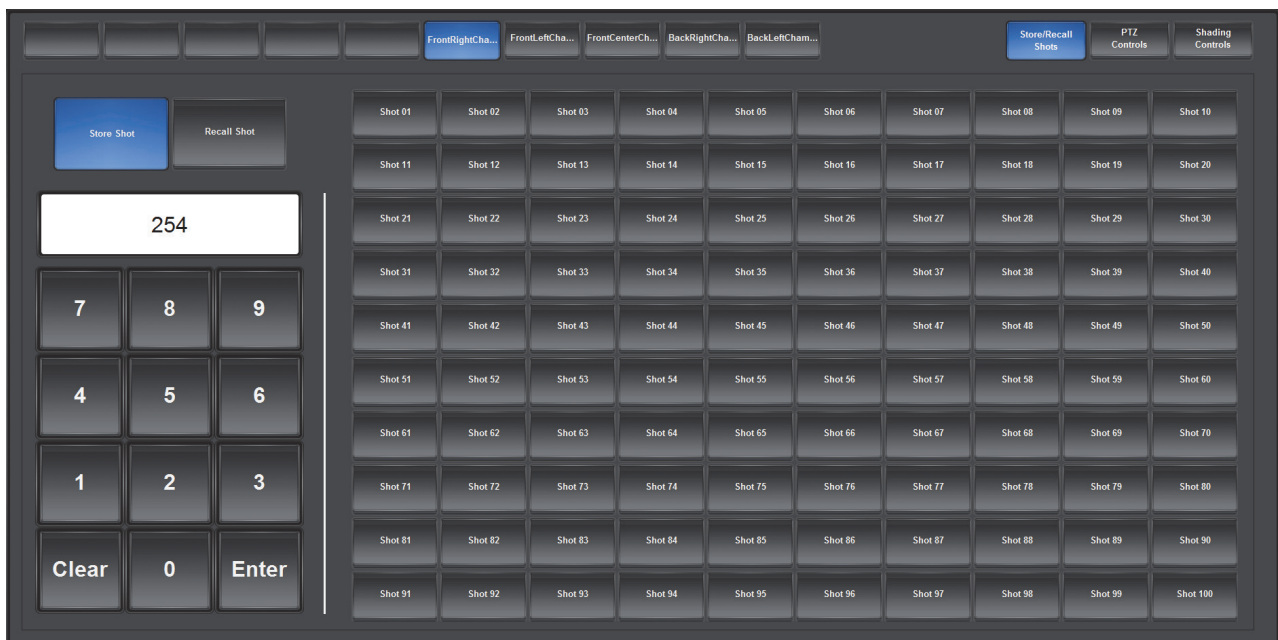


Figure 6.3 Store/Recall Shots Window

The **Store/Recall Shots** window includes the following settings and buttons:

Setting or Button	Description
Camera buttons	<p>The row of ten buttons across the top of the Store/Recall Shots window includes one button per camera.</p> <p>Tap a button to select the camera to which you want to store shots, or from which you want to recall them.</p>
Store Shot button	<p>Tap the button to switch to Store Shot mode.</p> <p>In Store Shot mode, you can save the current camera position as a shot for future recall.</p>
Recall Shot button	<p>Tap the button to switch to Recall Shot mode.</p> <p>In Recall Shot mode, you can recall saved shots for the current camera.</p> <p>Recall Shot mode is used for camera operation.</p>
Shot Selection keypad	<p>Type a shot number and then press the Enter button on the keypad to store or recall a shot, depending on the current mode.</p> <p>Alternatively, you can type a number in the box above the keypad and then press the Enter button on the keypad.</p> <p>Tip: The Shot buttons can also be used to select a shot for storage or recall. There are 100 Shot buttons, numbered 01 to 100. If you want to store or recall a shot higher than 100, use the Shot Selection keypad.</p>
Shot buttons	<p>Tap a Shot button to store or recall a shot, depending on the current mode.</p> <p>Shot buttons are used for camera operation.</p> <p>Tip: Be aware of the current mode (Store Shot or Recall Shot) before you tap a Shot button. If you are in Recall Shot mode and tap a Shot button, the current camera position is stored as that shot.</p> <p>Tip: Sony cameras can store up to 16 shots. The camera control panel also uses virtual shots, enabling you to store up to 1000 shots in total. The camera control panel has 100 Shot buttons, numbered 01 to 100. If you want to store or recall a shot higher than 100, use the Shot Selection keypad.</p> <p>Tip: Shots 01 to 16 are stored on the Sony cameras. The camera control panel stores only shots 17 to 999. If you want all your shots to be saved in data files, use only shots above 16.</p>

PTZ Controls Window

The **PTZ Controls** window enables you to manually adjust the position of the currently-selected camera. You can move cameras during a presentation, or move them into position to store a shot.

To access the PTZ Controls window:

- From the camera control interface, tap the **PTZ Controls** button.

Figure 6.4 shows the **PTZ Controls** window.

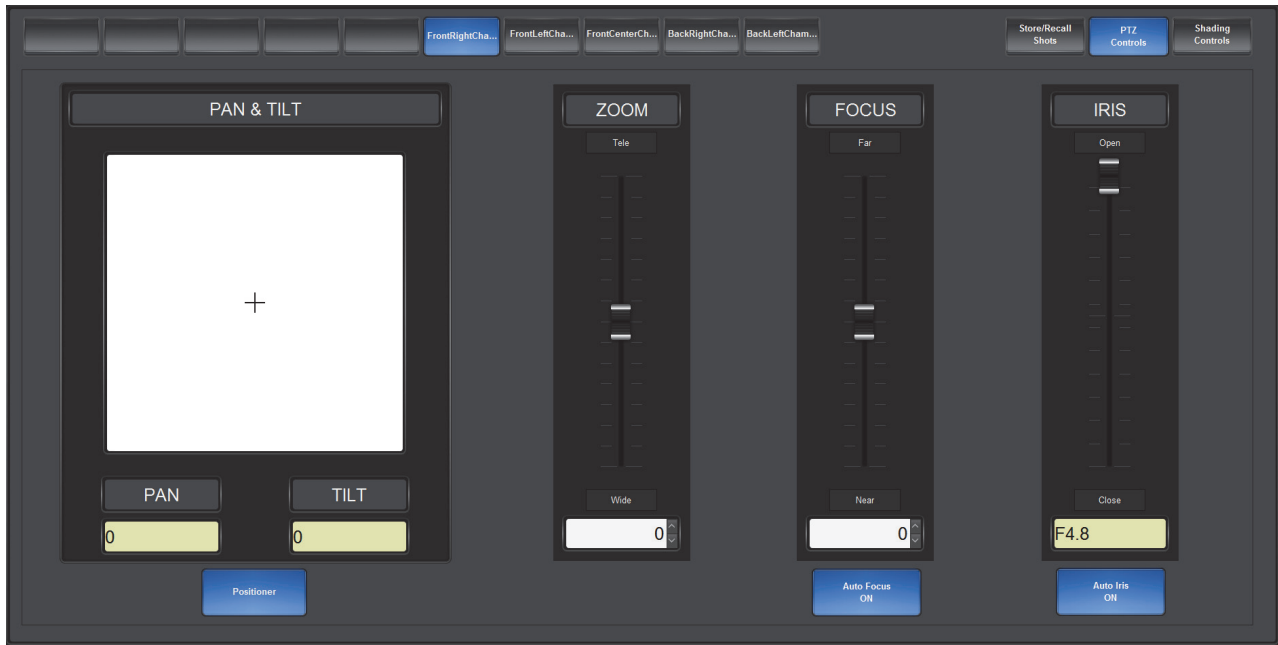


Figure 6.4 PTZ Controls Window (showing Pan/Tilt positioner)

The **PTZ Controls** window includes the following settings and buttons:

Setting or Button	Description
<p>Camera buttons</p>	<p>The row of ten buttons across the top of the PTZ Controls window includes one button per camera.</p> <p>Tap a button to select which camera you want to move.</p>
<p>Positioner button</p>	<p>Switches between interfaces for adjusting pan and tilt positions:</p> <ul style="list-style-type: none"> • PAN and TILT sliders — enable you to adjust pan and tilt separately. • Pan & Tilt Positioner — enables you to adjust pan and tilt simultaneously. <div data-bbox="467 485 1401 1041" style="text-align: center;"> </div>
<p>PAN and TILT sliders</p>	<p>Tap and drag the PAN or TILT slider handles to pan or tilt the camera.</p> <p>Alternatively, you can type a value in the box below the slider, or use the up/down arrows beside the box to select a value.</p> <p>The value range is -24 to 24. Higher pan values pan right. Higher tilt values tilt upwards.</p> <p>Pan and tilt slider values are relative, not absolute. When you release the slider, the value shown returns to zero.</p>
<p>Pan & Tilt Positioner</p>	<p>Tap and drag the cross-hairs within the white box until the camera is in the desired pan/tilt position.</p>
<p>ZOOM slider</p>	<p>Tap and drag the ZOOM slider handle up or down to zoom the lens.</p> <p>Alternatively, you can type a value in the box below the slider, or use the up/down arrows beside the box to select a value.</p> <p>The value range is -7 to 7. Higher values are towards telephoto, and lower values are towards wide.</p> <p>Zoom slider values are relative, not absolute. When you release the slider, the value shown returns to zero.</p>
<p>Auto Focus button</p>	<p>Tap to switch between automatic focus and manual focus control.</p> <p>When Auto Focus is OFF, you can adjust focus using the FOCUS slider.</p> <p>Note: The Auto Focus status may be shown incorrectly because Sony cameras cannot communicate their focus status to the LCS panel. Whenever you want to adjust the focus or know the Auto Focus state of a camera, tap the Auto Focus button at least once, until the desired state is shown.</p>

Figure 6.5 Pan/Tilt Sliders (left) and Pan/Tilt Positioner (Right)

Setting or Button	Description
FOCUS slider	<p>Tap and drag the FOCUS slider handle up or down to focus the lens manually. Alternatively, you can type a value in the box below the slider, or use the up/down arrows beside the box to select a value.</p> <p>The value range is -7 to 7. Higher values are towards far focus, and lower values are towards near focus.</p> <p>Focus slider values are relative, not absolute. When you release the slider, the value shown returns to zero.</p> <p>Note: You cannot adjust the focus if Auto Focus is ON. Unfortunately, the Auto Focus status may be shown incorrectly because Sony cameras cannot communicate their focus status to the LCS panel. Before you adjust the focus, tap the Auto Focus button at least once until the button says Auto Focus OFF.</p>
Auto Iris button	<p>Tap to switch between automatic and manual iris control.</p> <p>When Auto Iris is OFF, you can adjust the iris using the IRIS slider.</p> <p>Note: The Auto Iris status may be shown incorrectly because Sony cameras cannot communicate their iris status to the LCS panel. Whenever you want to adjust the iris or know the Auto Iris state of a camera, tap the Auto Iris button at least once, until the desired state is shown.</p>
Iris slider	<p>If you want to adjust the iris, tap and drag the IRIS slider handle up or down.</p> <p>Iris slider values are absolute. When you release the slider, the value you set remains.</p> <p>Note: You cannot adjust the iris if Auto Iris is ON. Unfortunately, the Auto Iris status and iris value may be shown incorrectly because Sony cameras cannot communicate their iris status to the LCS panel. Before you adjust the iris, tap the Auto Iris button at least once until the button says Auto Iris OFF.</p>

Shading Controls Window

The **Shading Controls** window enables you to adjust selected camera controls, including shading and shutter speed. Shading settings remain until changed again. They are saved as part of the shots.

Note: For more information about the effect of these camera controls, refer to the documentation that came with your camera system.

To access the Shading Controls window:

- From the camera control interface, tap the **Shading Controls** button.

Figure 6.6 shows the **Shading Controls** window.

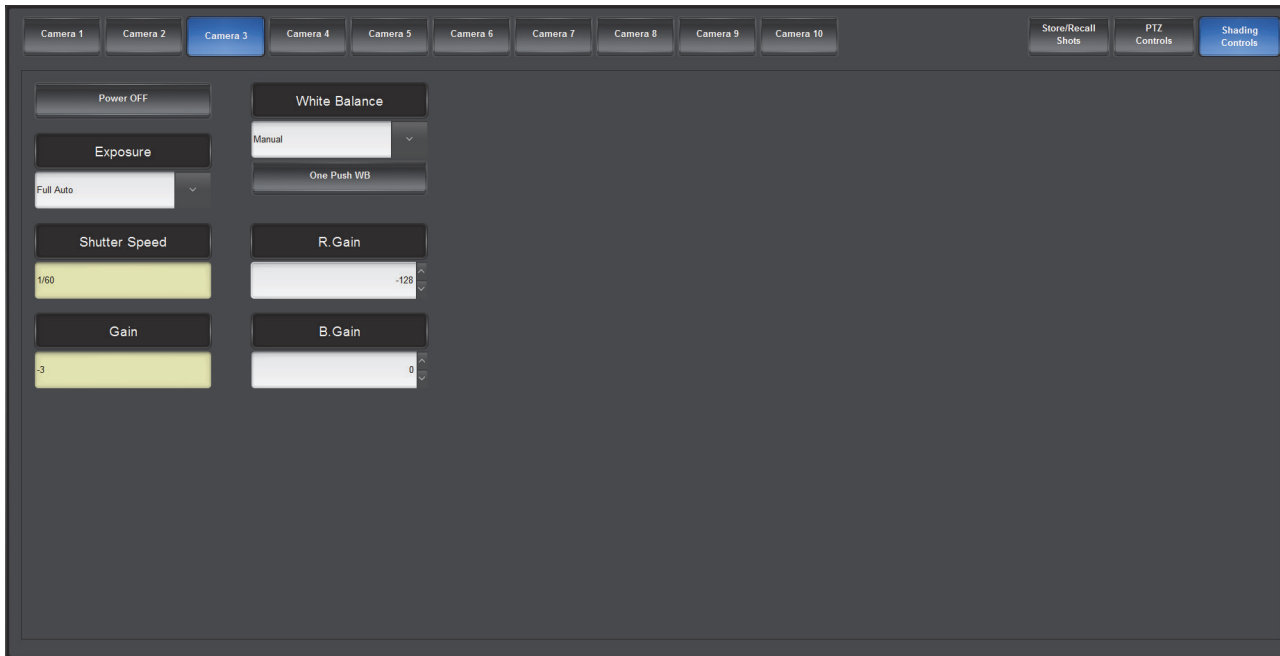


Figure 6.6 Shading Controls Window

The **Shading Controls** tab includes the following settings and buttons:

Setting or Button	Description
Camera buttons	The row of ten buttons across the top of the Shading Controls window includes one button per camera. Tap a button to select which camera you want to adjust.
Power button	Turns the camera ON or OFF . The Power button shows the current state.
Exposure	Select an exposure mode: <ul style="list-style-type: none"> • Full Auto enables automatic exposure. • Manual enables you to manually set the Shutter Speed and Gain. • Shutter Priority enables you to manually set the Shutter Speed, but not the Gain. • Iris Priority enables the iris to determine exposure.
Shutter Speed	Select a shutter speed. Tip: Shutter Speed is available only if Exposure is set to Manual or Shutter Priority .
Gain	Specify a gain value (-3, or 0 to 30). Tip: Gain is available only if Exposure is set to Manual .

Setting or Button	Description
White Balance	<p>White Balance — Select a white balance option:</p> <ul style="list-style-type: none"> • Auto enables automatic white balance. • Indoor sets white balance levels for typical indoor shooting conditions. • Outdoor sets white balance levels for typical outdoor shooting conditions. • One Push enables you to perform a white balance operation on demand, using the One Push button. • Manual enables manual white balance. It also enables you to set red gain and blue gain values.
One Push WB	Performs a white balance operation if White Balance is set to Auto or to One Push .
R.Gain	<p>Specify a red gain value (-128 to 127).</p> <p>Tip: Red gain is available only if White Balance is set to Manual.</p>
B.Gain	<p>Specify a blue gain value (-128 to 127).</p> <p>Tip: Blue gain is available only if White Balance is set to Manual.</p>

The Panasonic Control Panel

The Panasonic camera control panel is a DashBoard panel that enables you to configure and control up to ten Panasonic robotic cameras. You can control cameras manually, store and recall shots, and adjust shading controls and shot recall speeds.

This chapter contains information about the Panasonic camera control interface, and how to use it to commission cameras and create shots for a Legislative Control System (LCS).

The remaining LCS commissioning tasks are as follows:

- “**Installing the Camera Control Panel Files**” on page 7–1
- “**Launching the Camera Control Panel**” on page 7–1
- “**Adding the Joystick Server as a Data Source**” on page 7–2
- “**Configuring Cameras**” on page 7–2
- “**Creating, Storing, and Recalling Shots**” on page 7–3

The section, “**User Interface Reference**” on page 7–4 describes the controls available in the camera control panel.

Note: Each LCS implementation includes one or more camera control panels. There is one camera control panel for each type of camera in your system (Sony, Panasonic, CamBot). You must configure all cameras in your system, using the appropriate camera control panel for each type.

Installing the Camera Control Panel Files

The camera control panel is a DashBoard panel. DashBoard must be installed to run the camera control panel. DashBoard is available as a free download from www.rossvideo.com.

To install the camera control panel:

1. Ensure that DashBoard is installed.
2. Open the camera control panel zip file and then extract the **Panasonic HE-120** folder into the C:\ directory.

Launching the Camera Control Panel

Add the camera control panel to the DashBoard File Navigator, to make it readily available from DashBoard.

To add the camera control panel to DashBoard File Navigator:

1. Start DashBoard.
2. From the **Views** menu, tap **File Navigator**.
3. On the **File Navigator** tab, tap the green + symbol.
The **Browse for Folder** dialog appears.
4. Navigate to the **Panasonic HE-120** folder located in **Computer > OS (C)**, and then tap **OK**.
5. In the **File Navigator** tree, expand the **Panasonic HE-120** folder to show the **PanasonicCamera.grid** file.
6. To open the camera control panel anytime, double-tap the **PanasonicCamera.grid** file.

The camera control panel will always be available from the DashBoard File Navigator.

Adding the Joystick Server as a Data Source

This procedure applies only to systems that include a Ross Video joystick panel.

The joystick server appears as a node you created in the DashBoard device tree. You must add it as a data source in the camera control panel so the joystick can communicate with the LCS panel.

To add the joystick server as a data source:

1. With the camera control panel open, from DashBoard's **Edit** menu, tap **PanelBuilder Edit Mode** to enter **Edit Mode**.

Tip: When a panel is in **Edit Mode**, grid lines are visible over the entire panel.

2. In the **Edit Mode** toolbar, tap the **Data Sources** button.

The **Data Sources** dialog box appears.

3. In the **Data Sources** dialog box, find the following **Tag** entry and click the associated **Edit** button:

abs [id=Joystick, name=Joystick]

The **Select Device for Context** dialog box appears.

4. In the **Select a device** list, tap the joystick server node.

Tip: You created and named the joystick server node in a previous procedure. For more information, see “**Establishing a Device Connection to the Joystick Server**” on page 4–6.

Note: if the node is not green, the MasterPanel application is not running. Start MasterPanel (C:\Cambotics\masterpanel1.exe).

5. Within the joystick server node, select **Local Joystick**, and then tap **OK**.

6. If a **Device Type Mismatch** dialog box appears, tap **Yes**.

7. In the **Data Sources** dialog box, tap **Ok**.

8. Tap the **PanelBuilder Edit Mode** button to exit **Edit Mode**.

Leave the LCS panel open for the next procedure.

Configuring Cameras

This section describes how to configure cameras.

For more detailed information about specific configuration settings, see “**Camera Configuration Window**” on page 7–4.

To configure a camera:

1. In the camera control panel, tap the **Config** button.
2. In the **Remote Control IP** box, type the IP address of the **Panasonic AW-RP120** control console (joystick console), if present.

Note: A Panasonic joystick console is not required to use the Panasonic camera control panel.

3. On the **Cameras** tab, specify names and IP addresses for the Panasonic cameras.

IMPORTANT: If you are configuring cameras for use in a Ross Video Legislative Control System (LCS) that includes more than one type of camera (Panasonic, Sony, CamBot), you must ensure that each camera in the system has a unique camera number. For example, if your system includes five Panasonic cameras and five CamBot cameras, you might number the Panasonic cameras as 1, 2, 3, 7, and 9, and number the CamBot cameras as 4, 5, 6, 8, and 10. The camera numbers you assign here must correspond with the **Camera Key** numbers in the LCS panel configuration (**Config** interface, **Cameras** tab).

4. If any of the cameras are mounted in an inverted position, select the **Invert Horizontal Axis** and **Invert Vertical Axis** check boxes as required.

Tip: Invert camera axes as required to make all cameras behave consistently when manipulated by any controls, including the Ross Video joystick panel, camera control panels, and LCS panels.

5. On the **Recall Speed** tab, set the shot recall speed for each camera.
6. On the **Preset Names** tab, name the presets (shots) for each camera. These names will appear in the LCS panel.

Tip: Within the **Preset Names** tab there is a tab for each camera.

7. When you are finished naming your shots, tap the **Send Camera Preset Names** button. This makes the names available to the LCS.
8. If you want to adjust camera shading and other selected controls, tap the **Controls** button, then tap the **Shading Controls** button, and then adjust the following as required:

- **Camera Output** — Choose between normal camera output and test bars.
- **Shutter Speed** — Select a shutter speed.
- **Gain** — Specify a gain value (0 to 30).
- **Chroma** — Specify a chroma value (-3 to 3).
- **Detail** — Select a level of detail (High, Low, Off)
- **White Balance** — Select a white balance option from the list, to perform a camera white balance:
 - › **ATW** — Auto-Tracing White Balance. White balance adjusts continuously as you shoot.
 - › **AWB A** — Auto White Balance A. Applies a saved white balance preset.
 - › **AWB B** — Auto White Balance B. Applies a saved white balance preset.
 - › **Preset 3200K** — Applies white balance for typical indoor (incandescent) conditions.
 - › **Preset 5600K** — Applies white balance for typical outdoor (daylight) conditions.

Alternatively, to perform a manual white balance, tap the **Execute AWB** button. If **AWB A** or **AWB B** are selected, the **Execute AWB** button also stores the white balance level in the preset shown (**AWB A** or **AWB B**).

- **Execute ABB** — Tap this button to perform a black balance.
- **Pedestal** — Specify a black pedestal level (-150 to 150).
- **Digital Noise Reduction** — Select a level of digital noise reduction (High, Low, Off).
- **Flesh Tone Noise Suppress** — Select a level of flesh tone noise suppression (High, Low, Off).

Note: When you store a shot, shading controls are not saved as part of the shot.

Creating, Storing, and Recalling Shots

An LCS implementation typically includes several hundred camera shots. Creating and storing these shots can be tedious, but the task is easy if the shots are planned in advance. This section assumes that you have a list of shots to be created for each camera, and that the shot numbers have already been assigned to marks in the LCS panel configuration interface. For more information, see “**Assigning Shots to Marks**” on page 4–7.

This section summarizes how to create, store, and recall shots.

For more detailed information about specific controls, see “**Camera Control Window**” on page 7–8.

To create and store a shot:

1. In the camera control panel, tap the **Controls** button.
2. Tap a camera button to control that camera.

Tip: The ten camera buttons are in a row along the top of the window.

3. If you want to move the camera, you can use the Ross Video joystick panel, or the Camera Control window:
 - To use the Ross Video joystick panel:
 - › **Pan** — Push the right joystick right and left.
 - › **Tilt** — Push the right joystick forward and backward.
 - › **Zoom** — Rotate the right joystick.
 - › **Focus** — Turn the **FOCUS** knob.
 - To use the Camera Control window, tap the **PTZ Controls** button, and then adjust the following as required:
 - › **Pan and Tilt** — Tap the **Positioner** button to choose between **PAN / TILT** sliders or the pan/tilt positioner, and then move the camera.
 - › **Zoom** — Tap and drag the **ZOOM** slider handle to adjust the zoom.
 - › **Focus** — Tap and drag the **FOCUS** slider handle to adjust the focus.
 - Tip:** If the **FOCUS** slider is visible but not available, tap the **Auto Focus** button to turn off auto focus.
 - › **Iris** — Tap and drag the **IRIS** slider handle to adjust the iris.
 - Tip:** If the **IRIS** slider is visible but not available, tap the **Auto Iris** button to turn off automatic iris.
4. Tap the **Store/Recall Shots** button.
5. Tap the **Shot** button for the shot number you want to store.
 - Tip:** If you want to store a shot higher than 99, use the Shot Selection keypad to specify the shot number, instead of tapping a **Shot** button.
6. Continue creating and storing shots until all required shots exist for all cameras in your system.
 - Note:** If your LCS setup includes multiple types of cameras (i.e. Sony and Panasonic), you must use the corresponding camera control panel to configure each type of camera, and to create shots for them. For more information, see the chapter corresponding to the camera type(s).

User Interface Reference

This section describes the controls available in the Panasonic camera control panel.

The camera control panel consists of two interfaces:

- **Camera Configuration (Config) Window** — Enables you to configure camera settings such as camera names, IP addresses, recall speeds, and preset (shot) names. For more information, see “**Camera Configuration Window**” on page 7-4.
- **Camera Control (Controls) Window** — Enables you to operate cameras. You can move cameras, store and recall shots, and adjust shading controls. For more information, see “**Camera Control Window**” on page 7-8.

Camera Configuration Window

The camera configuration window enables you to configure camera settings such as camera names, IP addresses, recall speeds, and preset (shot) names.

To access the camera configuration window:

- Tap the **Config** button.

The **Config** window includes the following tabs:

- “**Cameras Tab**” on page 7-5
- “**Recall Speed Tab**” on page 7-6
- “**Preset Names Tab**” on page 7-7

Cameras Tab

Figure 7.1 shows the **Cameras** tab.

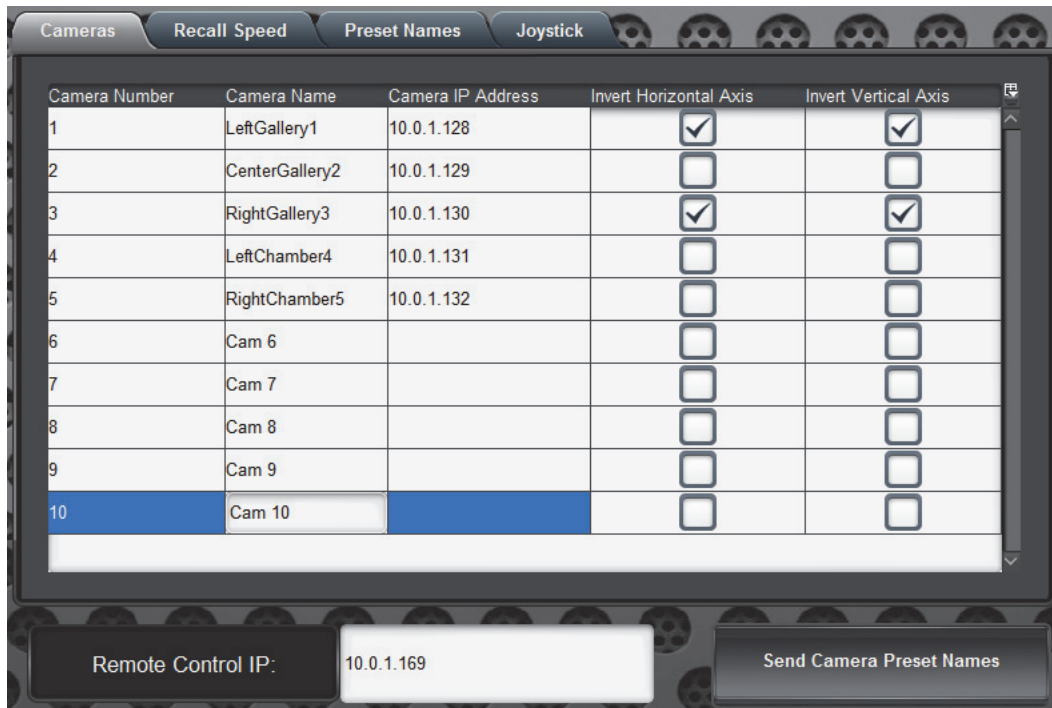


Figure 7.1 Cameras Tab

The **Cameras** tab includes the following settings and buttons:

Setting or Button	Description
Camera Number	The number of the camera being controlled. This is not editable. Each row in the table represents one camera. IMPORTANT: If you are configuring cameras for use in a Ross Video Legislative Control System (LCS) that includes more than one type of camera (Panasonic, Sony, CamBot), you must ensure that each camera in the system has a unique camera number. For example, if your system includes five Panasonic cameras and five CamBot cameras, you might number the Panasonic cameras as 1, 2, 3, 7, and 9, and number the CamBot cameras as 4, 5, 6, 8, and 10. The camera numbers you assign here must correspond with the Camera Key numbers in the LCS panel configuration (Config interface, Cameras tab).
Camera Name	Specify a meaningful name for the camera.
Camera IP Address	Specify the IP address of the camera. Every camera must have a unique IP address. IMPORTANT: If you are configuring cameras for use in a Ross Video Legislative Control System (LCS) that includes more than one type of camera (Panasonic, Sony, CamBot), you must ensure that all camera IP addresses in the system are unique.
Invert Horizontal Axis	Reverses the direction the camera pans when manipulated by a joystick or the Camera Control window. Use this option if the camera is mounted in an inverted position.
Invert Vertical Axis	Reverses the direction the camera tilts when manipulated by a joystick or the Camera Control window. Use this option if the camera is mounted in an inverted position.

Setting or Button	Description
Remote Control IP	Specify the IP address of the Panasonic AW-RP120 control console (joystick console), if present. A joystick console is not required to use Panasonic camera control panel.
Send Camera Preset Names	Tap this button to send the names of presets (shots) to other inter-connected DashBoard panels, such as a Legislative Control System (LCS) panel. Sending the preset names enables the other panel(s) to display them. Tip: Preset names are defined on the Preset Names tab.

Recall Speed Tab

Figure 7.3 shows the **Recall Speed** tab.

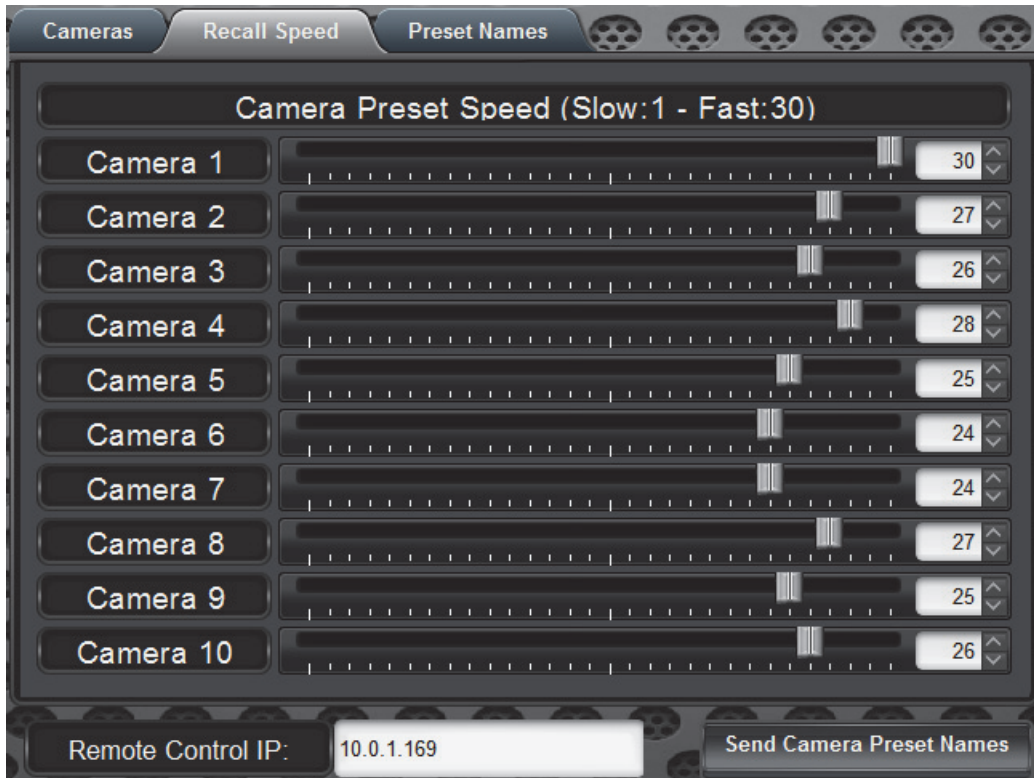


Figure 7.2 Recall Speed Tab

The **Recall Speed** tab includes the following settings and buttons:

Setting or Button	Description
Camera preset speeds	Do one of the following to set the speed of each camera: <ul style="list-style-type: none"> • Tap and drag the speed slider. The speed is shown in a box to the right of the slider. • Type a number in the speed box to the right of the slider. • Tap the up and down arrows beside the speed box. Tip: Higher numbers represent faster speeds

Setting or Button	Description
Remote Control IP	Specify the IP address of the Panasonic AW-RP120 hard IP control panel, if present. Hard control panel is not required to use Panasonic camera control panel.
Send Camera Preset Names	Tap this button to send the names of presets (shots) to other inter-connected DashBoard panels, such as a Legislative Control System (LCS) panel. Sending the preset names enables the other panel(s) to display them. Tip: Preset names are defined on the Preset Names tab.

Preset Names Tab

Figure 7.3 shows the Preset Names tab.



Figure 7.3 Preset Names Tab

The Preset Names tab includes the following settings and buttons:

Setting or Button	Description
Camera tabs	Each Camera tab corresponds to a camera in the system. Each camera has a separate list of presets. Tap a tab to set preset names for shots on a different camera.
Preset Names	Specify a meaningful name for the preset (also known as a shot). Examples of typical shot names include, “sitting”, “standing”, “close”, “far”, “tight”, and “wide”.
Remote Control IP	Specify the IP address of the Panasonic AW-RP120 hard IP control panel, if present. Hard control panel is not required to use Panasonic camera control panel.
Send Camera Preset Names	Tap this button to send the names of presets (shots) to other inter-connected DashBoard panels, such as a Legislative Control System (LCS) panel. Sending the preset names enables the other panel(s) to display them.

Camera Control Window

The camera control window enables you to operate cameras. You can move cameras, store and recall shots, and adjust shading controls.

To access the camera control interface:

- Tap the **Controls** button.

The **Controls** interface includes the following windows:

- “**Store/Recall Shots Window**” on page 7–8
- “**PTZ Controls Window**” on page 7–9
- “**Shading Controls Window**” on page 7–12

Store/Recall Shots Window

The **Store/Recall Shots** window enables you to store camera positions as shots for future recall. It also enables you to recall those shots. The **Store/Recall Shots** window is used as an operator interface for controlling cameras during a presentation.

To access the Store/Recall Shots window:

- From the camera control interface, tap the **Store/Recall Shots** button.

Figure 7.4 shows the **Store/Recall Shots** window.

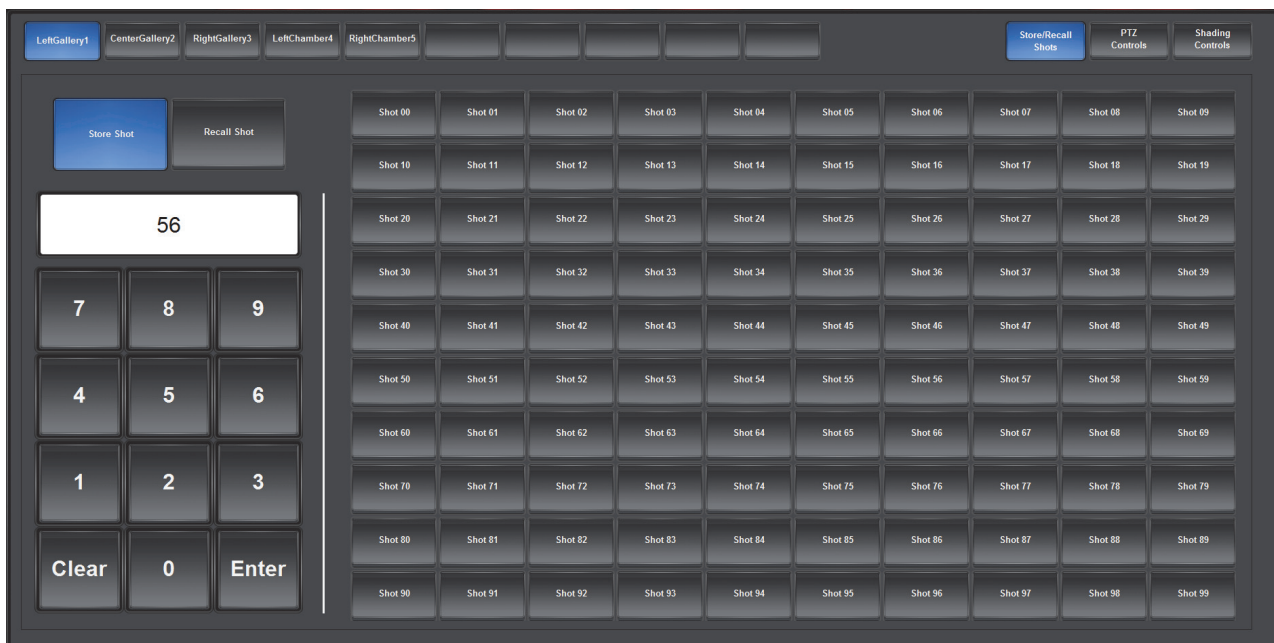


Figure 7.4 Store/Recall Shots Window

The **Store/Recall Shots** window includes the following settings and buttons:

Setting or Button	Description
Camera buttons	The row of ten buttons across the top of the Store/Recall Shots window includes one button per camera. Tap a button to select the camera to which you want to store shots, or from which you want to recall them.
Store Shot button	Tap the button to switch to Store Shot mode. In Store Shot mode, you can save the current camera position as a shot for future recall.

Setting or Button	Description
Recall Shot button	<p>Tap the button to switch to Recall Shot mode.</p> <p>In Recall Shot mode, you can recall saved shots for the current camera.</p> <p>Recall Shot mode is used for camera operation.</p>
Shot Selection keypad	<p>Type a shot number and then press the Enter button on the keypad to store or recall a shot, depending on the current mode.</p> <p>Alternatively, you can type a number in the box above the keypad and then press the Enter button on the keypad.</p> <p>Tip: The Shot buttons can also be used to select a shot for storage or recall. There are 100 Shot buttons, numbered 00 to 99. If you want to store or recall a shot higher than 99, use the Shot Selection keypad.</p>
Shot buttons	<p>Tap a Shot button to store or recall a shot, depending on the current mode.</p> <p>Shot buttons are used for camera operation.</p> <p>Tip: Be aware of the current mode (Store Shot or Recall Shot) before you tap a Shot button. If you are in Recall Shot mode and tap a Shot button, the current camera position is stored as that shot.</p> <p>Tip: Panasonic cameras can store up to 100 shots. The camera control panel also uses virtual shots, enabling you to store up to 1000 shots in total. The camera control panel has 100 Shot buttons, numbered 00 to 99. If you want to store or recall a shot higher than 99, use the Shot Selection keypad.</p> <p>Tip: Shots 00 to 99 are stored on the Panasonic cameras. The camera control panel stores only shots 100 to 999. If you want all your shots to be saved in data files, use only shots above 99.</p>

PTZ Controls Window

The **PTZ Controls** window enables you to manually adjust the position of the currently-selected camera. You can move cameras during a presentation, or move them into position to store a shot.

To access the PTZ Controls window:

- From the camera control interface, tap the **PTZ Controls** button.

Figure 7.5 shows the **PTZ Controls** window.

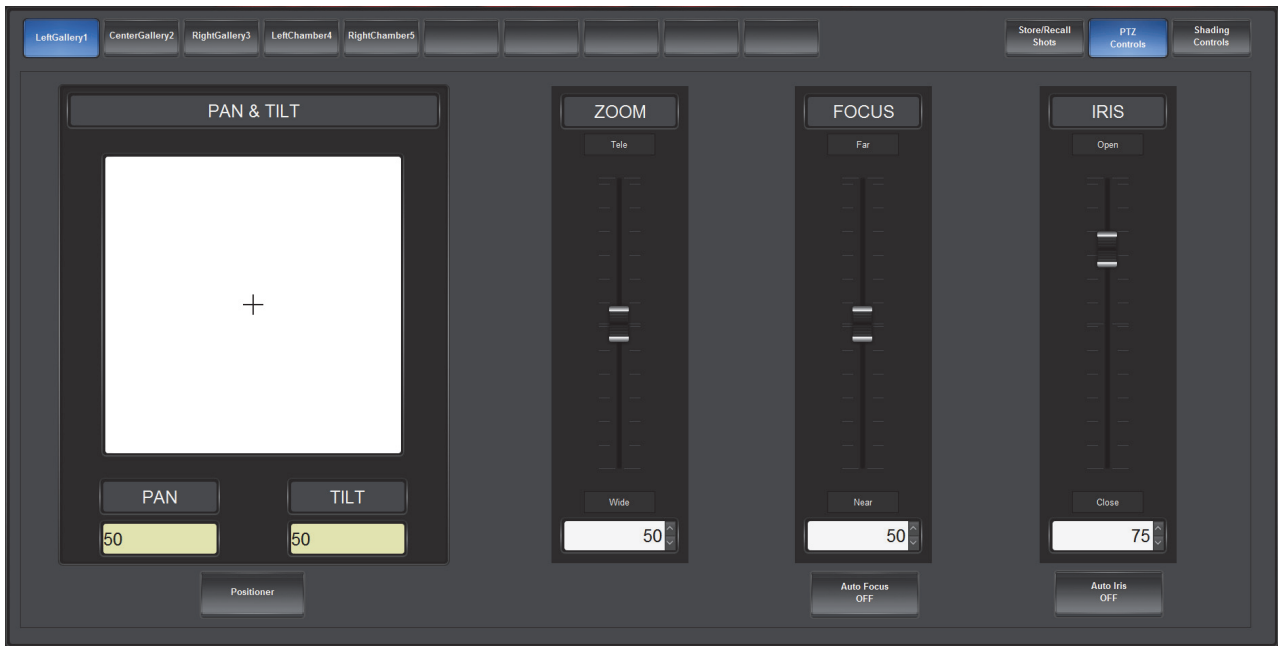


Figure 7.5 PTZ Controls Window (showing Pan/Tilt positioner)

The **PTZ Controls** window includes the following settings and buttons:

Setting or Button	Description
Camera buttons	The row of ten buttons across the top of the PTZ Controls window includes one button per camera. Tap a button to select which camera you want to move.
Positioner button	Switches between interfaces for adjusting pan and tilt positions: <ul style="list-style-type: none"> • PAN and TILT sliders — enable you to adjust pan and tilt separately. • PAN & TILT Positioner — enables you to adjust pan and tilt simultaneously.

This screenshot shows the 'Pan/Tilt Sliders' interface. At the top, there are camera selection buttons from Cam 1 to Cam 6. The main area contains two vertical sliders:

- PAN:** A slider with 'Right' at the top and 'Left' at the bottom. A numerical display at the bottom shows '50'.
- TILT:** A slider with 'Up' at the top and 'Down' at the bottom. A numerical display at the bottom shows '50'.

 A Positioner button is located at the bottom center.

This screenshot shows the 'Pan/Tilt Positioner' interface. At the top, there are camera selection buttons from Cam 1 to Cam 6. The main area features a large white square with a black crosshair in the center. Below the square are two buttons labeled PAN and TILT, each with a numerical display showing '50'. A Positioner button is located at the bottom center.

Figure 7.6 Pan/Tilt Sliders (left) and Pan/Tilt Positioner (Right)

Setting or Button	Description
PAN and TILT sliders	<p>Tap and drag the PAN or TILT slider handles to pan or tilt the camera.</p> <p>Alternatively, you can type a value in the box below the slider, or use the up/down arrows beside the box to select a value.</p> <p>The value range is 1 to 99. Higher pan values pan right. Higher tilt values tilt upwards.</p> <p>Pan and tilt slider values are relative, not absolute. When you release the slider, the value shown returns to zero.</p>
PAN & TILT Positioner	<p>Tap and drag the cross-hairs within the white box until the camera is in the desired pan/tilt position.</p> <p>Positioner values are relative, not absolute. When you release the cross-hairs, they return to the center and the values return to 50.</p>
ZOOM slider	<p>Tap and drag the ZOOM slider handle up or down to zoom the lens.</p> <p>Alternatively, you can type a value in the box below the slider, or use the up/down arrows beside the box to select a value.</p> <p>The value range is 1 to 99. Higher values are towards telephoto, and lower values are towards wide.</p> <p>Zoom slider values are relative, not absolute. When you release the slider, the value shown returns to zero.</p>
Auto Focus button	<p>Tap to switch between automatic focus and manual focus control.</p> <p>When Auto Focus is OFF, you can adjust focus using the FOCUS slider.</p>
FOCUS slider	<p>Tap and drag the FOCUS slider handle up or down to focus the lens manually.</p> <p>Alternatively, you can type a value in the box below the slider, or use the up/down arrows beside the box to select a value.</p> <p>The value range is 1 to 99. Higher values are towards far focus, and lower values are towards near focus.</p> <p>Focus slider values are relative, not absolute. When you release the slider, the value shown returns to zero.</p> <p>Note: If the FOCUS controls are shown but not available, tap the Auto Focus button below the slider to turn auto focus OFF. You cannot adjust focus if auto focus is ON.</p>
Auto Iris button	<p>Tap to switch between automatic and manual iris control.</p> <p>When Auto Iris is OFF, you can adjust the iris using the IRIS slider.</p>
Iris slider	<p>If you want to adjust the iris, tap and drag the IRIS slider handle up or down.</p> <p>Alternatively, you can type a value in the box below the slider, or use the up/down arrows beside the box to select a value.</p> <p>The value range is 1 to 99. Higher values open the iris, and lower values close it.</p> <p>Iris slider values are absolute. When you release the slider, the value you set remains.</p> <p>Note: If the IRIS controls are shown but not available, tap the Auto Iris button below the slider to turn automatic iris OFF. You cannot adjust the iris if automatic iris is ON.</p>

Shading Controls Window

The **Shading Controls** window enables you to adjust selected camera controls, including shading and shutter speed. Shading settings remain until changed again. They are not saved as part of the shots.

Note: For more information about the effect of these camera controls, refer to the documentation that came with your camera system.

To access the Shading Controls window:

- From the camera control interface, tap the **Shading Controls** button.

Figure 7.7 shows the **Shading Controls** window.

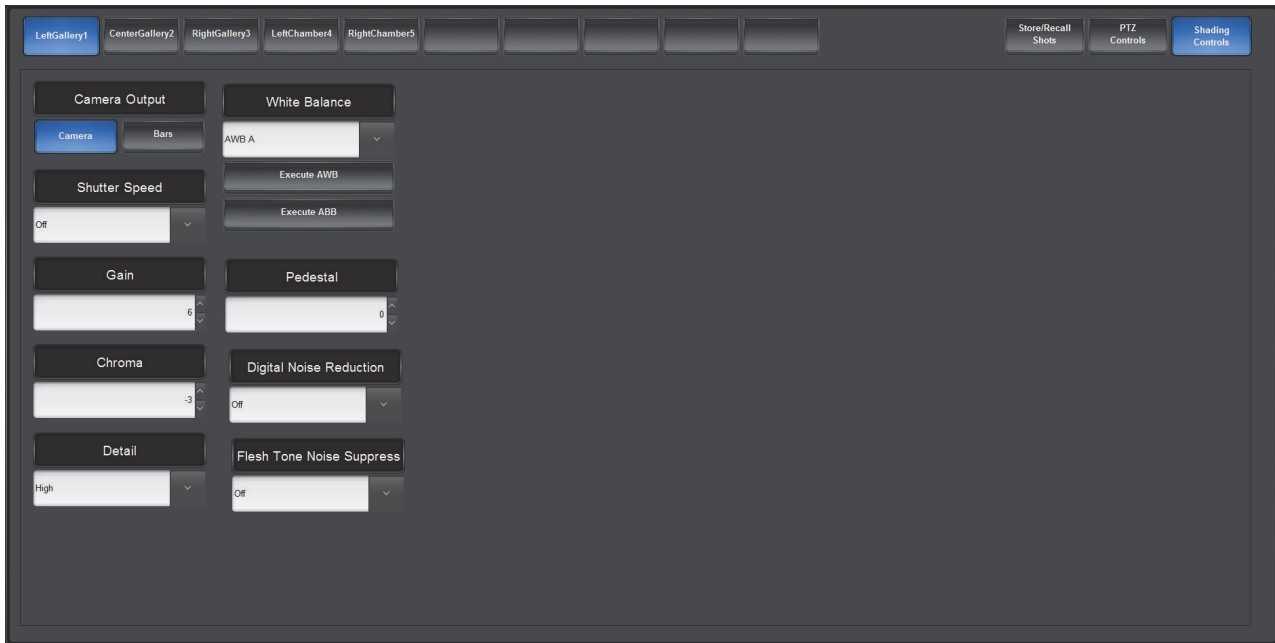


Figure 7.7 Shading Controls Window

The **Shading Controls** tab includes the following settings and buttons:

Setting or Button	Description
Camera buttons	The row of ten buttons across the top of the Shading Controls window includes one button per camera. Tap a button to select which camera you want to adjust.
Camera Output	Switches between normal camera output and test bars.
Shutter Speed	Select a shutter speed from the list, or select Off . Tip: When this setting is Off , the shutter will not operate, even if the Shutter button on the camera is pressed.
Gain	Specify a gain value. The range is 0 to 30.
Chroma	Specify a chroma value. The range is -3 to 3.
Detail	Select a level of image detail (sharpness) from the list. The options are High , Low , or Off . Tip: If Detail is set to High , detail is enhanced.

Setting or Button	Description
White Balance	Select a white balance option from the list, to perform a camera white balance: <ul style="list-style-type: none"> • ATW — Auto-Tracing White Balance. White balance adjusts continuously as you shoot. • AWB A — Auto White Balance A. Applies a saved white balance preset. • AWB B — Auto White Balance B. Applies a saved white balance preset. • Preset 3200K — Applies white balance for typical indoor (incandescent) conditions. • Preset 5600K — Applies white balance for typical outdoor (daylight) conditions.
Execute AWB button	Tap this button to perform a white balance. If AWB A or AWB B are selected, tapping Execute AWB also stores the white balance level in the preset shown (AWB A or AWB B).
Execute ABB button	Tap this button to perform an Automatic Black Balance (ABB).
Pedestal	Specify a black pedestal level. The range is -150 to 150 .
Digital Noise Reduction	Select a level of digital noise reduction. The options are Off , Low , and High .
Flesh Tone Noise Suppress	Select a level of flesh tone noise suppression. The options are Off , Low , and High .

