



# XPression

## Getting Started

⚠ CAUTION: Before you set up and operate this product, see the “Important Safety Instructions” in your Manual.

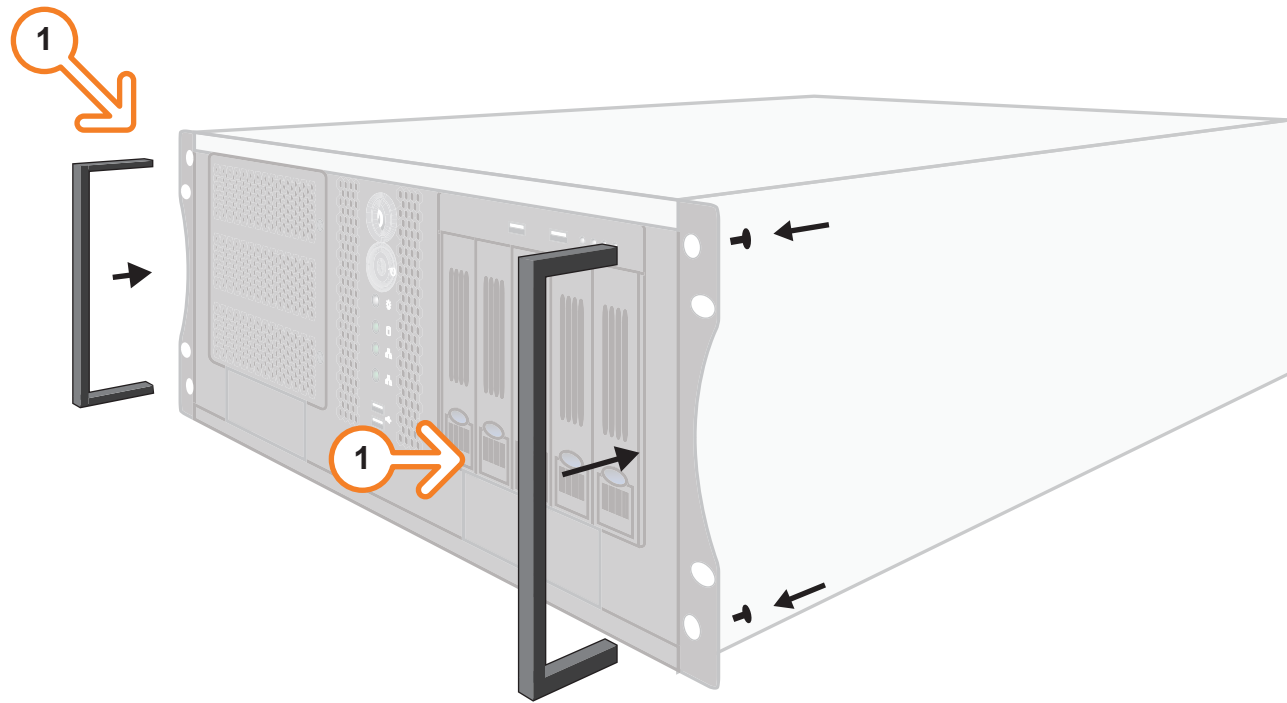

When contacting technical support, please provide the information listed on this label.

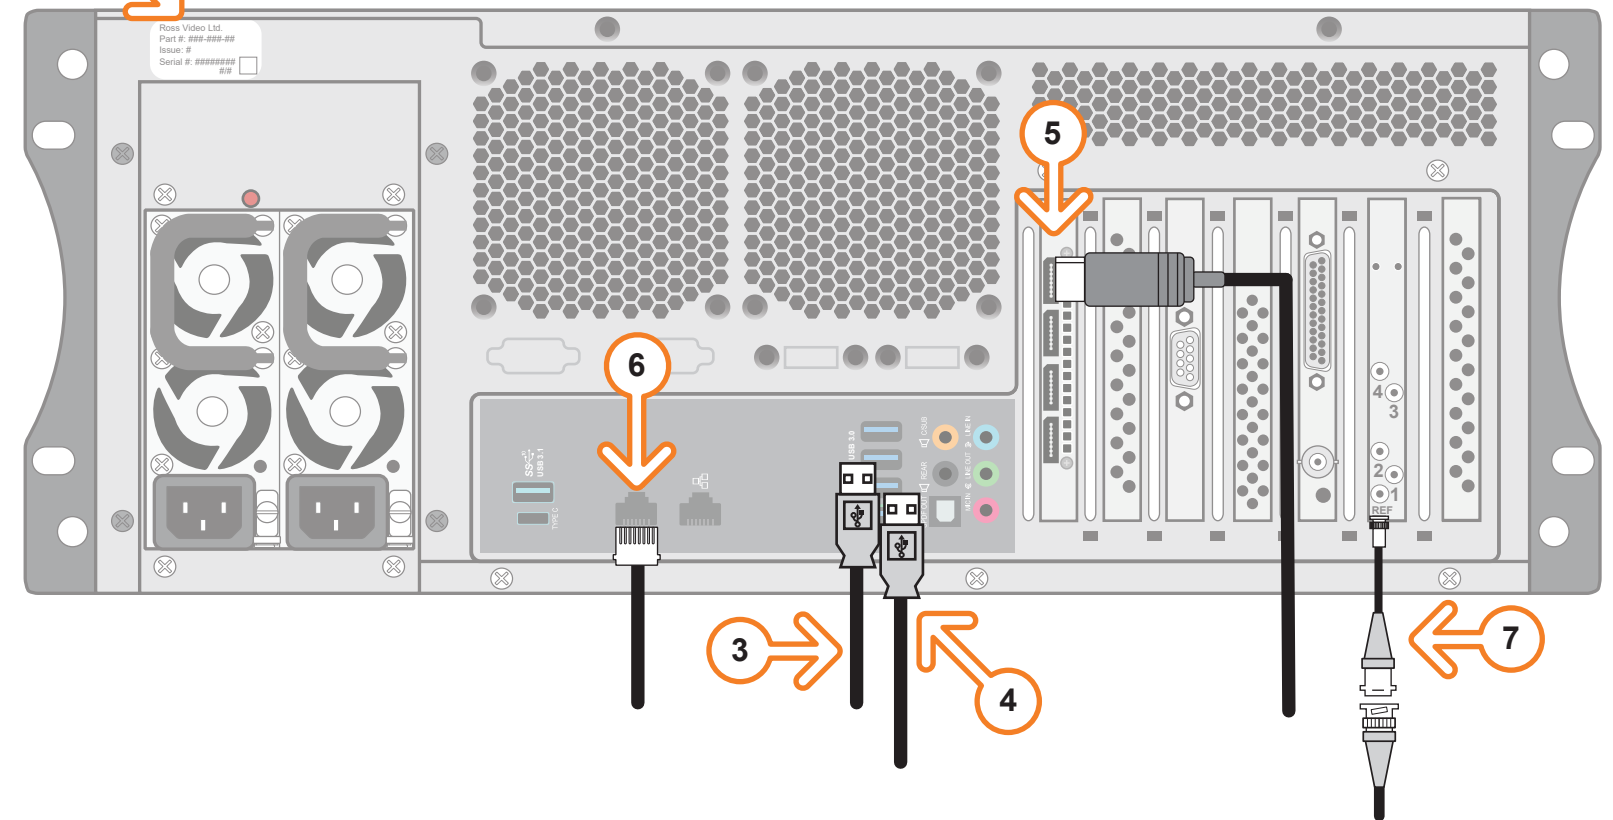


- 1 Attach the handles to the front rack-mount tabs by aligning the handle with the round holes and fastening from the rear with the supplied screws.
- 2 Use the supplied Rack Mount Kit to mount the XPression system in a 19" EIA equipment rack.  
*For information on installing the XPression chassis in a rack, see the provided document “Installing the Chassis in a Rack”.*
- 3 Plug the supplied Keyboard into a **USB** port.
- 4 Plug the supplied Mouse into a **USB** port.
- 5 Connect a Monitor (customer supplied) to any of the four display ports.  
*KVM extenders (customer supplied) are required when the XPression system monitor, keyboard, and mouse are located remotely from the rack room.*


- 6 Plug an Ethernet cable from your Local Area Network into one of the **Ethernet** ports.  
*XPression systems can run standalone or accept a connection to a production network. The network connection is also used for the RossTalk / Smart GPI Feature.*
- 7 Connect your house reference Genlock signal to the **REF** HD-BNC connector.  
*XPression systems accept analog blackburst or tri-level sync as reference inputs. Tri-level sync is recommended for HD installations.*

*Continued on other side...*

## Getting Started continued

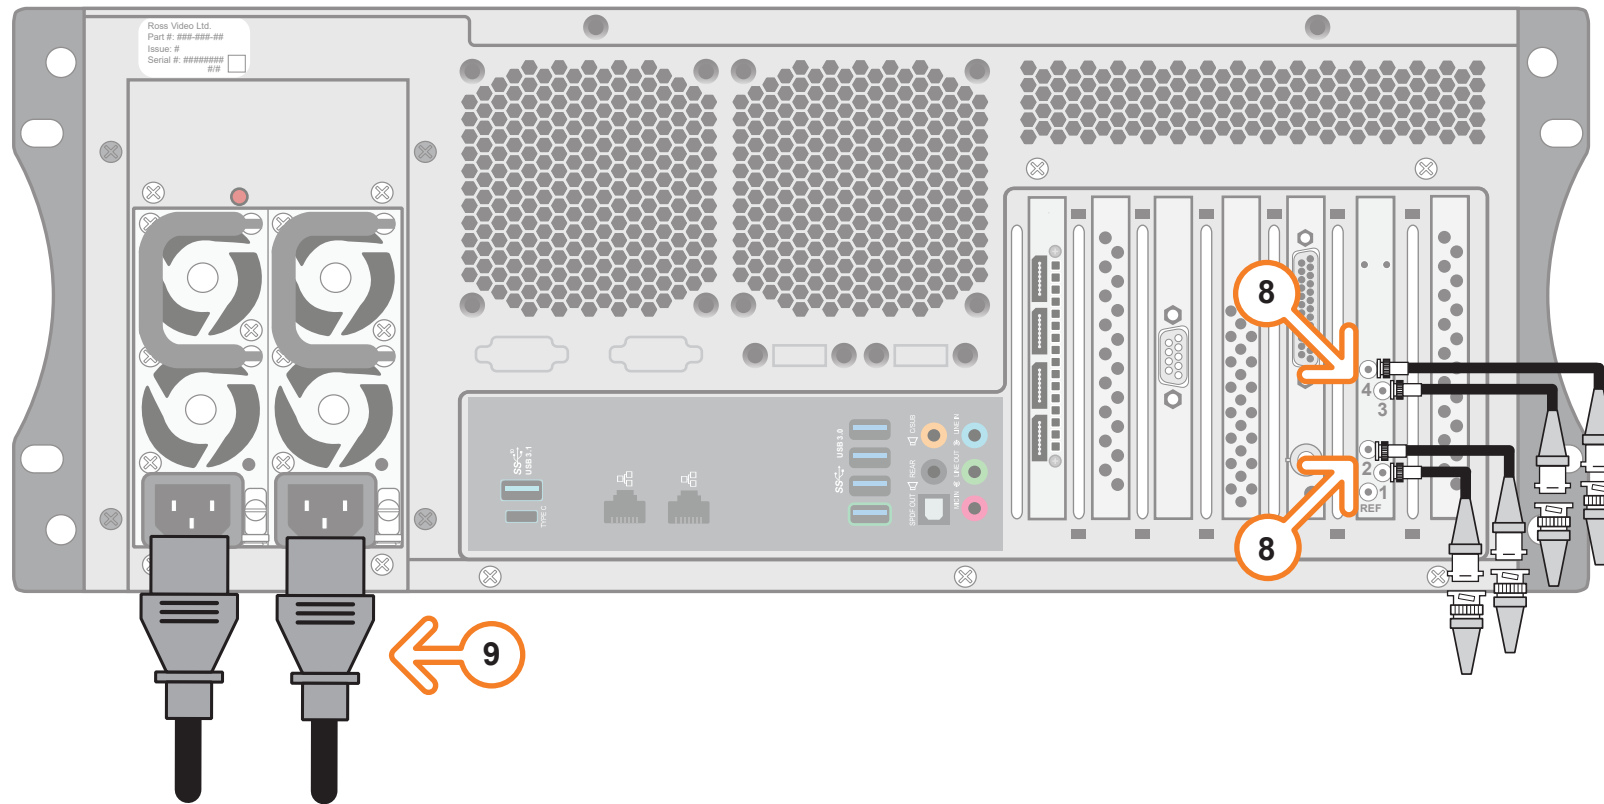

- 8 Connect the HD-BNC cables to HD-BNC connectors **1, 2, 3, and 4**.  
*See table below for supported configuration.*
- 9 Connect power cords from the **AC Ports** on the XPression system to the mains power.  
*XPression system power supplies are auto-sensing and can use either 110 VAC or 220 VAC.*
- 10 Press the **Power** button (⏻) on the front of the XPression system.  
*Ross Video recommends shutting down XPression systems from the Windows operating system.*
- 11 Click the XPression user account icon to log onto the system.
- 12 Launch XPression from the **Start** menu.

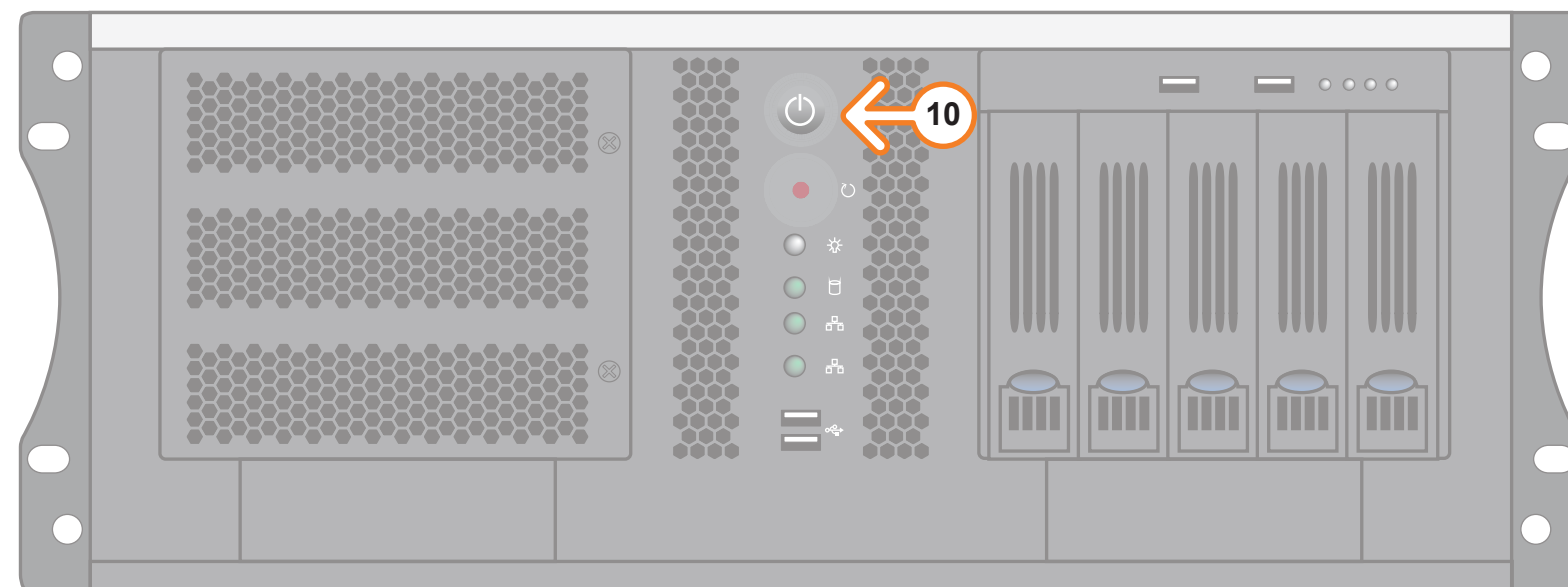

| HD-BNC | 4 Out (Default) | 2 In, 2 Out  |
|--------|-----------------|--------------|
| 1      | OUT 2 (KEY)     | OUT 1 (KEY)  |
| 2      | OUT 2 (FILL)    | OUT 1 (FILL) |
| 3      | OUT 1 (KEY)     | IN 2         |
| 4      | OUT 1 (FILL)    | IN 1         |

?

Need Help?

Technical Support:  
 1-844-652-0645 (North America)  
 +800 1005 0100 (International)  
 Email: [techsupport@rossvideo.com](mailto:techsupport@rossvideo.com)

**For information on...**

- operating XPression, see the “XPression User Guide” available in the C:\Archive folder
- maintenance of the XPression system, see the “XPression Maintenance Guide” in the C:\Archive folder
- other XPression features and functions, see the documents available in the C:\Archive folder