


## Cabling and Control

RS-232


Multiple cameras can be connected via the VISCA RS-232 terminal.

VISCA RS-232 allows connections of up to 15m in length.


**Option 1:** Daisy chain up to 7 PIVOTCams with 1 serial to ip converter.

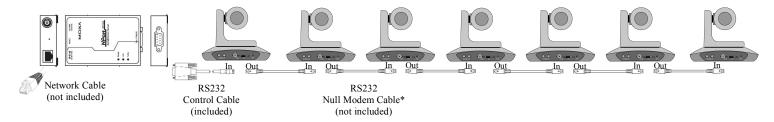


**Option 2:** Designate each PIVOTCam an unique IP address with a serial to ip converter.

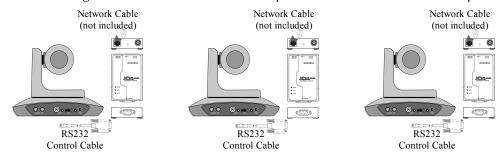

Option 3: Utilize an RS232 Visca controller.

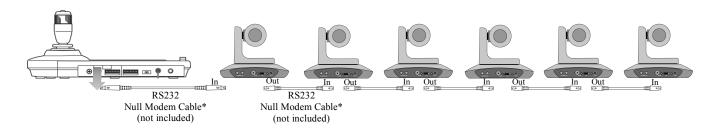

## \*Null Modem Cable Pinout:

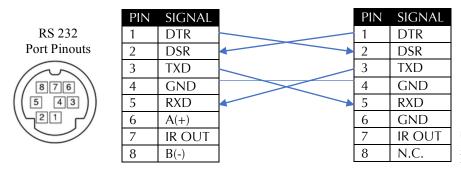

Note: This cable is 4 pieces: 1-A 'straight' RJ45 to DIN cable 2-A 'null-modem like wired' RJ45 to DIN cable 3-Two RJ45 to RJ45 connectors.

