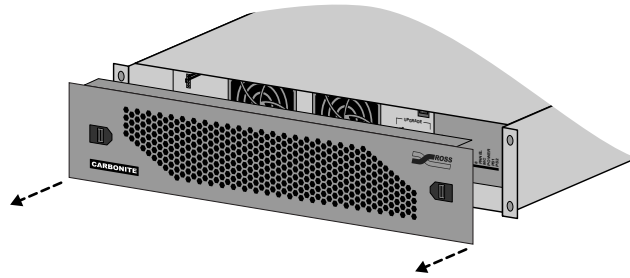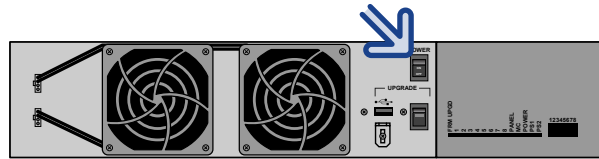**1**

Remove Frame Door.

2
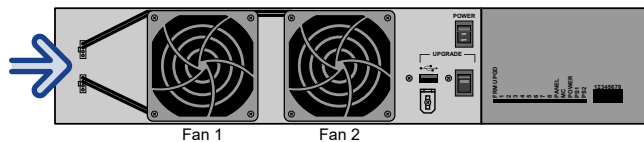
Turn OFF frame power.
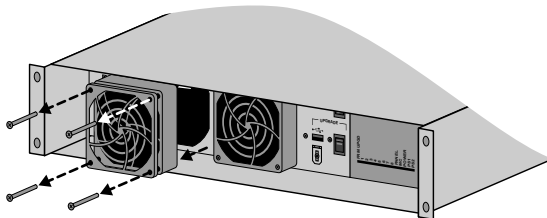

3

Unplug the fan cable for the fan you are replacing.

You may have to cut the cable ties to remove the fan.
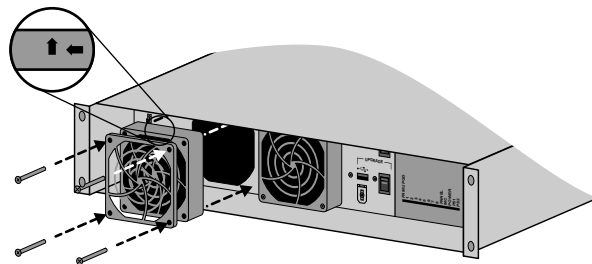

Fan 1   Fan 2

4

Remove the screws securing the fan to the frame and remove the fan and the front bezel.

5

Install the new fan and front bezel using the screws you removed.

Make sure not to pinch the fan cable behind the fan when installing it.

6

Re-connect the fan cable and turn the frame power ON.

Ensure that the new fan is working properly before replacing the frame door.

ROSS

4802DR-300-04