

CMA-9011-R

SDI Component Monitoring Amplifier with Reclocked SDI Outputs

User Manual



Thank you for choosing Ross

You've made a great choice. We expect you will be very happy with your purchase of Ross Technology.

Our mission is to:

1. Provide a Superior Customer Experience
 - offer the best product quality and support
2. Make Cool Practical Technology
 - develop great products that customers love

Ross has become well known for the Ross Video Code of Ethics. It guides our interactions and empowers our employees. I hope you enjoy reading it below.

If anything at all with your Ross experience does not live up to your expectations be sure to reach out to us at solutions@rossvideo.com.



David Ross
CEO, Ross Video
dross@rossvideo.com

Ross Video Code of Ethics

Any company is the sum total of the people that make things happen. At Ross, our employees are a special group. Our employees truly care about doing a great job and delivering a high quality customer experience every day. This code of ethics hangs on the wall of all Ross Video locations to guide our behavior:

1. We will always act in our customers' best interest.
2. We will do our best to understand our customers' requirements.
3. We will not ship crap.
4. We will be great to work with.
5. We will do something extra for our customers, as an apology, when something big goes wrong and it's our fault.
6. We will keep our promises.
7. We will treat the competition with respect.
8. We will cooperate with and help other friendly companies.

We will go above and beyond in times of crisis. *If there's no one to authorize the required action in times of company or customer crisis - do what you know in your heart is right. (You may rent helicopters if necessary.)*

CMA-9011-R User Manual

- Ross Part Number: **9011RDR-004-05**
- Release Date: May 2, 2014.

Copyright

© 2014 Ross Video Limited. Ross®, and any related marks are trademarks or registered trademarks of Ross Video Ltd. All other trademarks are the property of their respective companies. PATENTS ISSUED and PENDING. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, mechanical, photocopying, recording or otherwise, without the prior written permission of Ross Video. While every precaution has been taken in the preparation of this document, Ross Video assumes no responsibility for errors or omissions. Neither is any liability assumed for damages resulting from the use of the information contained herein.

Patents

Patent numbers 4,205,346; 5,115,314; 5,280,346; 5,561,404; 7,034,886; 7,508,455; 7,602,446; 7,834,886; 7,914,332; 8,499,019 B2; 2039277; 1237518; 1127289 and other patents pending.

Important Regulatory and Safety Notices to Service Personnel

Before using this product and any associated equipment, refer to the “**Important Safety Instructions**” listed below to avoid personnel injury and to prevent product damage.

Product may require specific equipment, and/or installation procedures to be carried out to satisfy certain regulatory compliance requirements. Notices have been included in this publication to call attention to these specific requirements.

Symbol Meanings



Protective Earth — *This symbol identifies a Protective Earth (PE) terminal, which is provided for connection of the supply system's protective earth (green or green/yellow) conductor.*



This symbol on the equipment refers you to important operating and maintenance (servicing) instructions within the Product Manual Documentation. Failure to heed this information may present a major risk of damage or injury to persons or equipment.



Warning — *The symbol with the word “Warning” within the equipment manual indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury.*



Caution — *The symbol with the word “Caution” within the equipment manual indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury. It may also be used to alert against unsafe practices.*



Warning Hazardous Voltages — *This symbol is intended to alert the user to the presence of uninsulated “dangerous voltage” within the product enclosure that may be of sufficient magnitude to constitute a risk of shock to persons.*



ESD Susceptibility — *This symbol is used to alert the user that an electrical or electronic device or assembly is susceptible to damage from an ESD event.*

Important Safety Instructions



1. **Warning** – Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. The safe operation of this product requires that a protective earth connection be provided. A grounding conductor in the equipment's supply cord provides this protective earth. To reduce the risk of electrical shock to the operator and service personnel, this ground conductor must be connected to an earthed ground.
6. Do not defeat the safety purpose of the grounding-type plug. A grounding type plug has two blades and a third grounding prong. The third prong is provided for your safety. If the provided plug does not fit in to your outlet, consult an electrician for replacement of the obsolete outlet. Protect the power cord from being walked on or pinching particularly at plugs, convenience receptacles, and point where they exit from the apparatus.



7. **Warning – Indoor Use: WARNING:** To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture.
8. Do not block ventilation openings. Install in accordance with manufacturer's instructions.
9. Do not install near heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
10. Do not use this apparatus near water.
11. Only use attachments/accessories specified by the manufacturer.
12. Unplug this apparatus during lightning storms or when unused for long periods of time.
13. Clean only with a dry cloth.
14. To avoid electrical shock, disconnect the A/C power cord before any servicing.
15. Refer all servicing to qualified personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug damage, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

EMC Notices

United States of America FCC Part 15

This equipment has been tested and found to comply with the limits for a class A Digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.



Notice — *Changes or modifications to this equipment not expressly approved by Ross Video Limited could void the user's authority to operate this equipment.*

CANADA

This Class “A” digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe “A” est conforme à la norme NMB-003 du Canada.

EUROPE

This equipment is in compliance with the essential requirements and other relevant provisions of **CE Directive 93/68/EEC**.

INTERNATIONAL

This equipment has been tested to **CISPR 22:1997** along with amendments **A1:2000** and **A2:2002**, and found to comply with the limits for a Class A Digital device.



Notice — *This is a Class A product. In domestic environments, this product may cause radio interference, in which case the user may have to take adequate measures.*

Maintenance/User Serviceable Parts

Routine maintenance to this GearLite product is not required. This product contains no user serviceable parts. If the module does not appear to be working properly, please contact Technical Support using the numbers listed under the “Contact Us” section on the last page of this manual. All GearLite products are covered by a generous 3-year warranty and will be repaired without charge for materials or labor within this period. See the “Warranty and Repair Policy” section in this manual for details.

Environmental Information

The equipment that you purchased required the extraction and use of natural resources for its production. It may contain hazardous substances that could impact health and the environment.

To avoid the potential release of those substances into the environment and to diminish the need for the extraction of natural resources, Ross Video encourages you to use the appropriate take-back systems. These systems will reuse or recycle most of the materials from your end-of-life equipment in an environmentally friendly and health conscious manner.

The crossed-out wheeled bin symbol invites you to use these systems.



If you need more information on the collection, reuse, and recycling systems, please contact your local or regional waste administration.

You can also contact Ross Video for more information on the environmental performances of our products.

Introduction

Overview

The CMA-9011-R SDI Component Monitoring Amplifier with Reclocked SDI Outputs is a high quality monitoring solution for SDI signals and part of a growing family of GearLite self-contained, small brick-format modules.

The CMA-9011-R addresses high quality imaging requirements by converting the eight MSBs of an SDI signal to analog composite video (CVBS). A 10bit DAC and special filtering techniques used in the design achieve a low-artifact video output.

The front panel of the CMA-9011-R chassis provides a power status LED for visual reference. In addition, user-selectable settings are available to place the CMA-9011-R into the proper operating mode. Some of these modes are: monochrome output, 75% color bar pattern, and vertical interval blanking.

The CMA-9011-R provides conversion of 525 and 625 SDI signals (SMPTE 259M). NTSC, PAL, and PAL-N standards are supported. The CMA-9011-R also has four relocked SDI outputs. Special measures have been taken to ensure excellent return loss at both input and output. This guarantees error-free performance with short cables.

The CMA-9011-R includes a universal power adapter and line cord suitable for the country of use. Various mounting options are included that allow a wide range of installation choices. The CMA-9011-R provides a flexible broadcast-quality SDI component monitoring solution in a small, stand-alone package.

Simplified Block Diagram

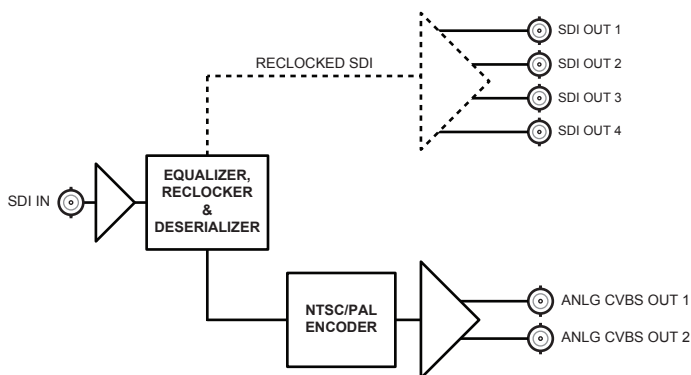


Figure 1 Simplified Block Diagram of CMA-9011-R Functions

Features

The CMA-9011-R includes the following features:

- NTSC, PAL, or PAL-N operation
- 10bit DAC resolution
- 8bit data processing
- Four reclocked SDI outputs
- Reclocking to reduce jitter and noise
- Automatic input cable equalization > 250m (> 820ft) of Belden 8281
- Color bar test signal with valid SDI input
- Excellent I/O specifications
- Terminating input 75ohms
- Visual indicator LED for power status
- Small brick form factor
- 5V universal adapter with locking DC connector
- 3-year warranty

Installation

Static Discharge

Whenever handling the CMA-9011-R and other related equipment, please observe all static discharge precautions as described in the following note:



ESD Susceptibility — *Static discharge can cause serious damage to sensitive semiconductor devices. Avoid handling circuit boards in high static environments, such as carpeted areas, and when wearing synthetic fiber clothing. Always exercise proper grounding precautions when working on circuit boards and related equipment.*

Unpacking

Unpack each CMA-9011-R you received from the shipping container and check the contents to ensure that all items are included. If any items are missing or damaged, contact your sales representative or Ross Video directly.

Mounting and Installation

The CMA-9011-R can be mounted in any convenient location. However, to ensure long life for this product, observe the following precautions and operating requirements:

- Maintain an ambient temperature of 20°C to 40°C.
- Allow for air circulation around the chassis for convectional cooling.

Many different mounting positions are possible with the included mounting hardware. Some installation options are permanent and require careful consideration of the final positioning before installation. Please note that in some mounting locations, the power adapter must be affixed in a similar manner as the chassis.

Other possible options include the use of adhesive magnetic sheets (not included) affixed to the chassis and the power adapter, for removable mounting on metal cabinets etc.

Cable ties may be necessary in some applications to relieve strain on the mounting hardware and the connectors.

Surface Mount Strips

The included VELCRO® brand surface mount strips allow the GearLite module and power supply to be affixed to a permanent location during use and easily

removed for adjustments. Carefully consider the installation location before proceeding; the adhesive is very aggressive and is not easily removed. The adhesive will cure fully in 24 hours.

To install the Surface Mount Strips

1. Remove the **Protective Backing Film** from the adhesive on the bottom of the two VELCRO® brand **Surface Mount Strips**.
2. Adhere the **Surface Mount Strips** to the bottom side of the chassis. (**Figure 2**)

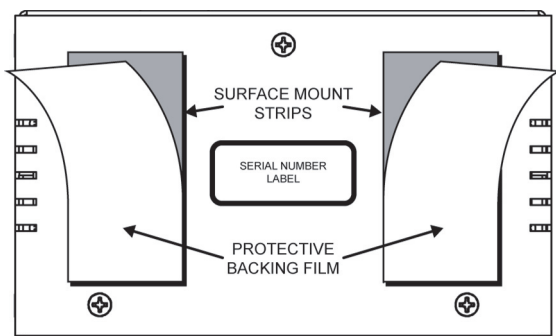


Figure 2 Surface Mount Installation Option

3. Remove the **Protective Backing Film** from the other side of the VELCRO® brand **Surface Mount Strips**.
4. Press the chassis into position on the surface you want to mount it to.



Operating Tip — An additional VELCRO® brand **Surface Mount Strip** is available to mount the power adapter.

Non-Slip Pads

Four non-slip adhesive pads have been supplied for desktop placements. Simply remove the protective backing film from the adhesive and affix one non-slip pad to each of the four corners on the bottom of the chassis.

Optional Mounting Accessories

Ross Video is committed to providing practical solutions for the needs of your high-quality broadcast facility.

Flat Metal Plate

Use the flat metal plate for permanent mounting to a rack, a desk, or any other location where bolts or screws can be applied. Be sure to position the module to allow for operator adjustments, if required.

To install the Flat Metal Plate

1. Remove the **2** screws from the bottom of the chassis.
2. Install the **Flat Metal Plate** onto the bottom of the chassis (**Figure 3**) using the screws provided in the Mounting Kit. Do not use the screws removed during **Step 1**.

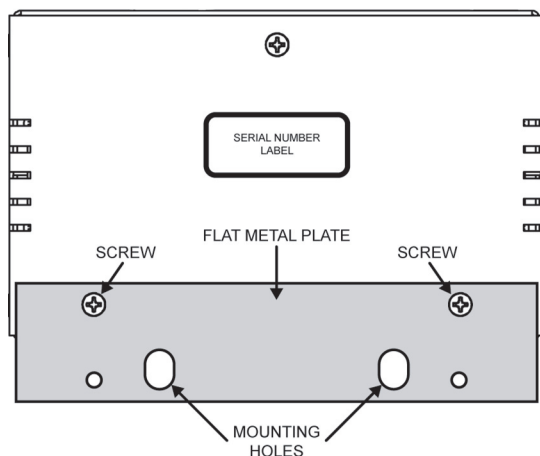


Figure 3 Flat Metal Plate Installation Option

3. Install the chassis in the desired location using the **Mounting Holes** on the **Flat Metal Plate**. Mounting screws are not provided by Ross Video.

Angle Mounting Bracket

The Angle Mounting Bracket (**Figure 4**) allows a single GearLite module to be installed in positions not possible with the flat metal plate. The bracket has a 90° angle. Mounting screws are not provided by Ross Video.

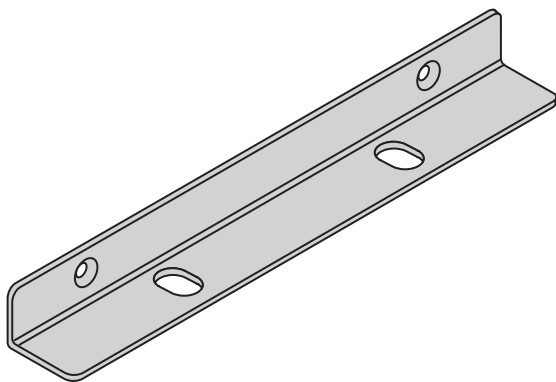


Figure 4 *Angle Mounting Bracket*

Setup

Power Adapter and Supply

Connect the PS-9000 power adapter to the power supply connector. The PS-9000 provides up to 2A of regulated +5V DC (5%). The DC power cord has a locking connector that securely fastens into the power supply DC jack on the CMA-9011-R. The CMA-9011-R has a standard miniature power jack (center pin positive).

If using an adapter other than the PS-9000, ensure that:

- the polarity is correct
- the voltage is +5V DC regulated to 5%
- sufficient current for the CMA-9011-R is supplied



Caution — *Use of improper adapters may damage the CMA-9011-R and will void the warranty.*

Installations outside of North America using line voltages of 200-240V require a plug, certified for the country of use, to be installed on the supplied line cord. Refer to the section “**Important Regulatory and Safety Notices to Service Personnel**” at the front of this manual for details.

Cable Connections Overview

Connect the cables to the CMA-9011-R according to the designations indicated on the chassis label and **Figure 5**. The input is internally terminated at 75ohm. It is not necessary to terminate unused outputs.

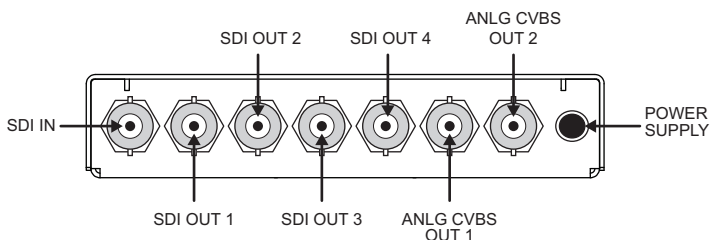


Figure 5 CMA-9011-R Connections

DIP Switch Setup

An 8-position DIP switch allows you to configure the CMA-9011-R to fit into almost any installation. (**Figure 6**) Settings are described in **Table 1**.

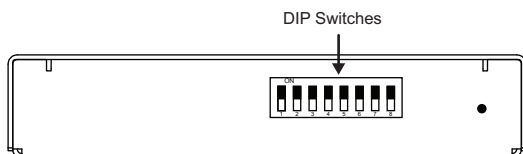


Figure 6 CMA-9011-R Front Edge User Controls

Figure 6 shows all switches in the default UP (↑) position. The DIP switches are number 1-8 starting at the left of the block. The top of the CMA-9011-R chassis includes a label that provides a condensed DIP switch settings chart. This chart is intended as a quick reference guide.



Note — **SW1-7** and **SW1-8** are not implemented and should be left in their default UP (↑) position.

Table 1 outlines how to set **SW1-1** to **SW1-6** and the following conventions are used:

- ↑ Set the DIP switch in the UP position
- ↓ Set the DIP Switch in the DOWN position

Table 1 DIP Switch Positions

Video Standard		Chroma	VI	Setup	Mode	Setting Selections
SW1-1	SW1-2	SW1-3	SW1-4	SW1-5	SW1-6	
↑	↑					NTSC (525)
↑	↓					PAL-N (625)
↓	↓					PAL-B/G (625)
		↑				Chroma On
		↓				Chroma Off
			↑			Pass VI
			↓			Blank VI
				↑		Setup On
				↓		Setup Off
					↑	Normal Mode
					↓	Color Bars

Status LEDs

The front panel of the module has an LED that displays the status of the amplifier. **Figure 7** indicates the location of the LED and **Table 2** describes the LED function.

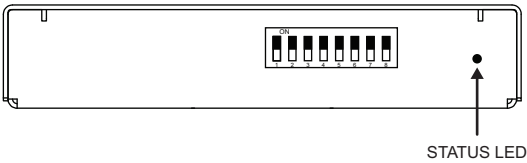


Figure 7 CMA-9011-R Status Indicator LEDs

Table 2 Status LED Descriptions

LED	Color	Function
STATUS	Green	When lit green, this LED indicates that the CMA-9011-R is powered on and functioning correctly.
	Flashing Green	When flashing green, this LED indicates that there is a problem with the input signal or the CMA-9011-R is set to output Color Bars.
	Off	When unlit, this LED indicates a loss of power to the CMA-9011-R.

Specifications

Technical Specifications

Specifications are subject to change without notification.

Table 3 CMA-9011-R — Technical Specifications

Category	Parameter	Specification
Serial Digital Video Input	Number of Inputs	1
	Signal Standards Accommodated	SMPTE 259M (conversion at 270Mbps only)
	Input Impedance	75ohm terminating
	Return Loss	>19dB to 270MHz
	Equalization	Automatic, up to 26dB (250m of Belden 8281 cable) @ 270Mbps
Serial Video Output	Number of Outputs	4
	Signal Standards Accommodated	SMPTE 259M
	Output Impedance	75ohm
	Output Return Loss	>20dB to 270MHz
	Signal Level	800mV ±10%
	DC Offset	<±50mV
	Rise and Fall Time	>750pS typical (20-80%)
	Overshoot	<7% typical
	Outputs Short Circuit Protected	Yes
	Propagation Delay	>14ns

Table 3 CMA-9011-R — Technical Specifications

Category	Parameter	Specification
Analog Monitoring Output	Number of Outputs	2
	Video	Composite Analog Video
	Output Impedance	75ohm
	Output Return Loss	>45dB to 6MHz
	Output Isolation	>44dB to 6MHz
	Signal Level	1Vp-p nominal
	DC Offset for RGB or Composite Video	<± 50mV
	Frequency Response	±0.25dB to 5MHz typically -1dB @ 5.75MHz
	Differential Phase	<1%
	Differential Gain	<1°
	Outputs Short Circuit Protected	Yes
	RMS Noise (unweighted)	-53dB 0-5MHz
Power	Required Voltage	+5V DC (5% regulation)
	Current Consumption	>425mA typical
	Total Power	>2.2W typical
Other	Operating Range	20°C to 40°C ambient
	Dimensions (approx.)	13cm x 9cm x 2.5cm (5" x 3.5" x 1")
	Weight (approx.)	312g (11oz)

Service Information

Warranty and Repair Policy

The GearLite CMA-9011-R is warranted to be free of any defect with respect to performance, quality, reliability, and workmanship for a period of THREE (3) years from the date of delivery to the customer. In the event that your GearLite CMA-9011-R proves to be defective in any way during this warranty period, Ross Video Limited reserves the right to repair or replace this piece of equipment with a unit of equal or superior performance characteristics.

Should you find that this GearLite CMA-9011-R has failed after your warranty period has expired, we will repair your defective product should suitable replacement components be available. You, the owner, will bear any labor and/or part costs incurred in the repair or refurbishment of said equipment beyond the THREE (3) year warranty period.

In no event shall Ross Video Limited be liable for direct, indirect, special, incidental, or consequential damages (including loss of profits) incurred by the use of this product. Implied warranties are expressly limited to the duration of this warranty.

This GearLite CMA-9011-R User Manual of our Digital Products line provides all pertinent information for the safe installation and operation of your GearLite Product. Ross Video policy dictates that all repairs to the GearLite CMA-9011-R are to be conducted only by an authorized Ross Video Limited factory representative. Therefore, any unauthorized attempt to repair this product, by anyone other than an authorized Ross Video Limited factory representative, will automatically void the warranty. Please contact Ross Video Technical Support for more information.

In Case of Problems

Should any problem arise with your GearLite CMA-9011-R, please contact the Ross Video Technical Support Department. (Contact information is supplied at the end of this publication.)

A Return Material Authorization number (RMA) will be issued to you, as well as specific shipping instructions, should you wish our factory to repair your GearLite CMA-9011-R. If required, a temporary replacement module will be made available at a nominal charge. Any shipping costs incurred will be the responsibility of you, the customer. All products shipped to you from Ross Video Limited will be shipped collect.

The Ross Video Technical Support Department will continue to provide advice on any product manufactured by Ross Video Limited, beyond the warranty period without charge, for the life of the equipment.

Notes:

Notes:

Notes:

Contact Us

Contact our friendly and professional support representatives for the following:

- Name and address of your local dealer
- Product information and pricing
- Technical support
- Upcoming trade show information

Technical Support

Telephone: +1 613 • 652 • 4886
After Hours Emergency: +1 613 • 349 • 0006
Email: techsupport@rossvideo.com

General Information

Telephone: +1 613 • 652 • 4886
Fax: +1 613 • 652 • 4425
Email: solutions@rossvideo.com
Website: <http://www.rossvideo.com>

Visit Us

Visit our website for:

- Company information and news
- Related products and full product lines
- Online catalog
- Testimonials