



User Guide

Version 3.6

Thank You for Choosing Ross

You've made a great choice. We expect you will be very happy with your purchase of Ross Technology. Our mission is to:

1. Provide a Superior Customer Experience
 - offer the best product quality and support
2. Make Cool Practical Technology
 - develop great products that customers love

Ross has become well known for the Ross Video Code of Ethics. It guides our interactions and empowers our employees. I hope you enjoy reading it below.

If anything at all with your Ross experience does not live up to your expectations be sure to reach out to us at solutions@rossvideo.com.



David Ross
CEO, Ross Video
dross@rossvideo.com

Ross Video Code of Ethics

Any company is the sum total of the people that make things happen. At Ross, our employees are a special group. Our employees truly care about doing a great job and delivering a high quality customer experience every day. This code of ethics hangs on the wall of all Ross Video locations to guide our behavior:

1. We will always act in our customers' best interest.
2. We will do our best to understand our customers' requirements.
3. We will not ship crap.
4. We will be great to work with.
5. We will do something extra for our customers, as an apology, when something big goes wrong and it's our fault.
6. We will keep our promises.
7. We will treat the competition with respect.
8. We will cooperate with and help other friendly companies.
9. We will go above and beyond in times of crisis. *If there's no one to authorize the required action in times of company or customer crisis - do what you know in your heart is right. (You may rent helicopters if necessary.)*

Ross Platform Manager · User Guide

- Ross Part Number: **7900DR-004-3.6**
- Release Date: February 27, 2024. Printed in Canada.
- Software Issue: **3.6**

The information contained in this Guide is subject to change without notice or obligation.

Copyright

© 2016 - 2024 Ross Video Limited. Ross® and any related marks are trademarks or registered trademarks of Ross Video Limited. All other trademarks are the property of their respective companies. PATENTS ISSUED and PENDING. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, mechanical, photocopying, recording or otherwise, without the prior written permission of Ross Video. While every precaution has been taken in the preparation of this document, Ross Video assumes no responsibility for errors or omissions. Neither is any liability assumed for damages resulting from the use of the information contained herein.

Patents

Patent numbers 4,205,346; 5,115,314; 5,280,346; 5,561,404; 7,034,886; 7,508,455; 7,602,446; 7,834,886; 7,914,332; 8307284, 2039277; 1237518; 1127289 and other patents pending.

Warranty and Repair Policy

Ross Video Limited (Ross) warrants its Ross Platform Manager systems to be free from defects under normal use and service a time period of 15 months from the date of shipment:

If an item becomes defective within the warranty period Ross will repair or replace the defective item, as determined solely by Ross.

Warranty repairs will be conducted at Ross, with all shipping FOB Ross dock. If repairs are conducted at the customer site, reasonable out-of-pocket charges will apply. At the discretion of Ross, and on a temporary loan basis, plug in circuit boards or other replacement parts may be supplied free of charge while defective items undergo repair. Return packing, shipping, and special handling costs are the responsibility of the customer.

This warranty is void if products are subjected to misuse, neglect, accident, improper installation or application, or unauthorized modification.

In no event shall Ross Video Limited be liable for direct, indirect, special, incidental, or consequential damages (including loss of profit). Implied warranties, including that of merchantability and fitness for a particular purpose, are expressly limited to the duration of this warranty.

This warranty is TRANSFERABLE to subsequent owners, subject to Ross' notification of change of ownership.

Extended Warranty


For customers that require a longer warranty period, Ross offers an extended warranty plan to extend the standard warranty period by one year increments. For more information about an extended warranty for your Ross Platform Manager system, contact your regional sales manager.

Environmental Information

The equipment that you purchased required the extraction and use of natural resources for its production. It may contain hazardous substances that could impact health and the environment.

To avoid the potential release of those substances into the environment and to diminish the need for the extraction of natural resources, Ross Video encourages you to use the appropriate take-back systems. These systems will reuse or recycle most of the materials from your end-of-life equipment in an environmentally friendly and health conscious manner.

The crossed-out wheeled bin symbol invites you to use these systems.



If you need more information on the collection, reuse, and recycling systems, please contact your local or regional waste administration.

You can also contact Ross Video for more information on the environmental performances of our products.

Use of Hazardous Substances in Electrical and Electronic Products (China RoHS)

Ross Video Limited has reviewed all components and processes for compliance to:

“Management Methods for the Restriction of the Use of Hazardous Substances in Electrical and Electronic Products” also known as China RoHS.

The “Environmentally Friendly Use Period” (EFUP) and Hazardous Substance Tables have been established for all products. We are currently updating all of our Product Manuals.

The Hazardous substances tables are available on our website at:

<http://www.rossvideo.com/about-ross/company-profile/green-practices/china-rohs.html>

电器电子产品中有害物质的使用

Ross Video Limited 按照以下的标准对所有组件和流程进行了审查：

“电器电子产品有害物质限制使用管理办法” 也被称为中国RoHS。

所有产品都具有“环保使用期限”（EFUP）和有害物质表。目前，我们正在更新我们所有的产品手册。

有害物质表在我们的网站：

<http://www.rossvideo.com/about-ross/company-profile/green-practices/china-rohs.html>

Company Address

Ross Video Limited

8 John Street
Iroquois, Ontario
Canada, K0E 1K0

Ross Video Incorporated

P.O. Box 880
Ogdensburg, New York
USA 13669-0880

General Business Office: (+1) 613 • 652 • 4886

Fax: (+1) 613 • 652 • 4425

Technical Support: (+1) 613 • 652 • 4886

After Hours Emergency: (+1) 613 • 349 • 0006

E-mail (Technical Support): techsupport@rossvideo.com

E-mail (General Information): solutions@rossvideo.com

Website: <http://www.rossvideo.com>

Contents

Introduction	1
A Word of Thanks	1-1
About This Guide	1-2
Documentation Conventions	1-2
Getting Help	1-4
Getting Started	2
Open Ross Platform Manager	2-2
Explore the Ross Platform Manager User Interface	2-3
Using a Desktop Computer with Ross Platform Manager	2-3
Entering Text for Right-to-Left Languages	2-8
Monitoring the System	3
Monitor System Health	3-2
User Defined System Monitors	3-3
Monitor and Control Connected Users	3-5
Manage the Ross Platform Manager SNMP Agent	3-6
Managing the Audit Log	3-11
User Preferences	4
Set User Preferences	4-2
Configuring System Properties	5
Configure Database Connectivity	5-2
Activating a Product Key for Ross Platform Manager Software	5-3
Reactivating a Product Key	5-4
Deactivating a Product Key	5-5
Configure Default System Settings	5-5
Viewing File Synchronization Information	5-7
Managing a Product Key	6
Activating a Product Key	6-2
Deactivating a Product Key	6-10
Editing a Product Key's Notes	6-12
Modifying Product Key Settings	6-12
Managing Product Keys	6-13
Generating a License Usage Report	6-14
Managing a Target	7
Adding a Target	7-2
Authorizing a Target	7-5
Transitioning an SDPE Blade Target	7-7
Copying Info from the Target Manager	7-7
Taking a Snapshot of a Ross Platform Target	7-8
Using the Visual Workflow Manager	7-8
Managing a Deployment	8
Adding a Product to the Release Manager	8-2

Creating or Modifying a Deployment	8-3
Executing a Deployment	8-4
Saving and Restoring a Deployment Snapshot	8-4
Managing DashBoard CustomPanels	9
CustomPanel Features Overview	9-2
Using the CustomPanel Manager	9-3
CustomPanel File Versioning	9-4
Configuring User Permissions	10
Create a User Role	10-2
Modify a User Role	10-3
Delete a User Role	10-4
Create a User Account	10-5
Modify a User Account	10-6
Delete a User Account	10-7
Configure Target Permissions	10-7
Configuring LDAP Authentication	11
Connect to an LDAP Directory Server	11-2
Map to LDAP User Data	11-3
Map to LDAP Group (Role) Data	11-4
Changing Your Password	12
Change Your Ross Platform Manager Password	12-2
Managing Perspectives	13
Create a New Perspective	13-2
Open a Saved Perspective	13-3
Rename a Perspective	13-4
Change the Layout of a Perspective	13-4
Revert a Perspective to the Default Layout	13-5
Make a User Perspective Global	13-5
Delete a Perspective	13-6
Using the Log Viewer	14
Downloading the Log	14-2
Clearing the Log	14-2

Introduction

A Word of Thanks

Thank you for choosing the Ross Platform Manager as your product orchestration solution.

We are committed to providing you with the highest level of customer satisfaction possible. If, for any reason, you have questions or comments, please call Ross Video at +1-613-652-4886 or send us an e-mail at techsupport@rossvideo.com.

We hope that you visit our website www.rossvideo.com to stay up to date with ongoing software releases, join our customer forum and learn more about the complete range of Ross Video products.

Note that software maintenance and extended warranties are available for your system to protect and extend the life of your investment. Our sales team are more than happy to provide further information on the plans available. Members of our sales team promptly respond to e-mails sent to: solutions@rossvideo.com.

Again, thank you for your purchase of Ross Platform Manager from Ross Video. We are confident of your future pleasure with your choice.

Yours Sincerely,

A handwritten signature in black ink that reads "John R. Naylor". The signature is written in a cursive, flowing style.

John R. Naylor
Vice President - Enterprise Management
john.naylor@rossvideo.com

About This Guide

This guide contains the following chapters that cover the use of the Ross Platform Manager interconnection system:

1. “**Introduction**” summarizes the guide and provides important terms, conventions, and features.
2. “**Getting Started**” provides an overview of the Ross Platform Manager user interface.
3. “**Monitoring the System**” provides instructions on how to monitor the health of a Ross Platform Manager system.
4. “**User Preferences**” provides instructions on how to override the default language, time zone, and font sizes set by the Ross Platform Manager administrator.
5. “**Configuring System Properties**” provides instructions on how to configure a Ross Platform Manager system.
6. “**Managing a Product Key**” provides instructions on how to manage multiple product key licenses and feature activations from the Product Key Manager view
7. “**Managing a Target**” provides instructions on instantiating and authorizing a connection to a target.
8. “**Managing a Deployment**” provides instructions on creating a deployment.
9. “**Managing DashBoard CustomPanels**” provides instructions on using DashBoard CustomPanels in Ross Platform Manager.
10. “**Configuring User Permissions**” provides instructions on how to set role-base user permissions for Ross Platform Manager users.
11. “**Configuring LDAP Authentication**” provides instructions on how to use LDAP to create Ross Platform Manager user accounts and roles.
12. “**Changing Your Password**” provides instruction on how to change your Ross Platform Manager account password
13. “**Managing Perspectives**” provides instructions on how to create global perspectives available to all Ross Platform Manager users.
14. “**Using the Log Viewer**” provides instructions on how to download and clear application data logs from Ross Platform Manager.

If you have questions pertaining to the operation of the Ross Video product, please contact us at the numbers listed in the section “**Contacting Technical Support**” on page 1–4. Our technical staff is always available for consultation, training, or service.

Documentation Conventions

This guide uses special text formats to identify parts of the user interface, text that a user must enter, or a sequence of menus and submenus that a user must follow to reach a particular command.

Interface Elements

Bold text identifies a user interface element such as a dialog box, a menu item, or a button. For example:

In the **Media Manager Client**, click **Channel 1** the **Channels** section.

User Entered Text

Courier text identifies text that a user must enter. For example:

In the **File Name** box, enter **Channel101.property**.

Referenced Guides

Italic text identifies the titles of referenced guides, manuals, or documents. For example:

For more information, refer to the section “**Twitter Configuration**” on page 3–6 in the *Ross Platform Manager User Guide*.

Menu Sequences

Menu arrows identify a sequence of menu items that a user must follow to reach a particular command. For example: if a procedure step contains “**Server > Save As**,” a user should click the **Server** menu and then click **Save As**.

Important Instructions

Star icons identify important instructions or features. For example:

- ★ After installing Ross Platform Manager software, you must obtain Ross Platform Manager feature licenses from Ross Video Technical Support before users can access Ross Platform Manager features.

Getting Help

To access the Ross Platform Manager Online Help system, click the **Help** icon in the main toolbar. For help about the currently open panel, click the **Help** button in a panel title bar to view a help topic about the panel.

The Online Help system contains the following navigation tabs to locate and access Online Help topics:

- **Contents** — table of contents
- **Search** — full text search
- **Favorites** — preferred information storage and access

Ross Video also supplies a print-ready PDF file of the *Ross Platform Manager User Guide* on the Ross Platform Manager Software Installation DVD.

Contacting Technical Support

Technical Support is staffed by a team of experienced specialists ready to assist you with any question or technical issue.

Ross Video has technical support specialists strategically located around the globe to ensure a prompt response to technical inquiries. Our primary technical support center is located in Ottawa, Ontario, Canada. In addition, we have offices in The United Kingdom (London), Australia (Sydney), and Singapore with satellite locations in New York City, The Netherlands, and China. As we expand our presence globally, we are constantly evaluating other key locations to have a local technical support specialist in order to better service our customers.

North America

Our North America center located in Ottawa, Ontario, Canada and is open Monday to Friday 8:30 a.m. to 6:00 p.m. EST, with 24/7/365 on-call service after hours.

Our telephone number is: +1-613-652-4886

Toll free within North America: +1 844-652-0645

EMEA

Our EMEA center is located in Buckinghamshire, England, United Kingdom and is open Monday to Friday 8:30 a.m. to 5:00 p.m. GMT. After hours support is provided by our North America location.

Our telephone number is: +44 (0)1189502446

International toll free: +800 1005 0100

Emergency After-hours Support

Our telephone number is: +1-613-349-0006

Toll free within North America: +1 844-652-0645

International toll free: +800 1005 0100

Online

E-mail: techsupport@rossvideo.com

Website: use the link <http://www.rossvideo.com/support/tech-support.html> to open a support request.

Getting Started

Ross Platform Manager (RPM) is an enterprise grade software solution which acts as a gateway to your Ross Ecosystem. RPM aspires to provide customers with a unified approach to manage, coordinate, and securely access production control systems. RPM aims at improving operational efficiencies in an efficient, easy to use, and secure approach.

RPM provides the following capabilities.

1. Software Licensing
2. Software Orchestration and Configuration Management
3. AWS instance lifecycle management
4. Role Based Access Control for OpenGear devices

This chapter discusses the following topics:

- Open Ross Platform Manager
- Explore the Ross Platform Manager User Interface
- Using a Desktop Computer with Ross Platform Manager
- Entering Text for Right-to-Left Languages


Open Ross Platform Manager

Ross Platform Manager is a web based application that you access through a web browser.

To open Ross Platform Manager

1. Use one of the following supported web browsers to open the Ross Platform Manager web page provided by your Ross Platform Manager administrator:
 - Microsoft Internet Explorer® version 9 or greater
 - Mozilla Firefox® version 3.6 or greater
 - Google Chrome™ browser version 17.x or higher
 - Apple Safari® version 5.1.x or greater

The **Login** panel opens.

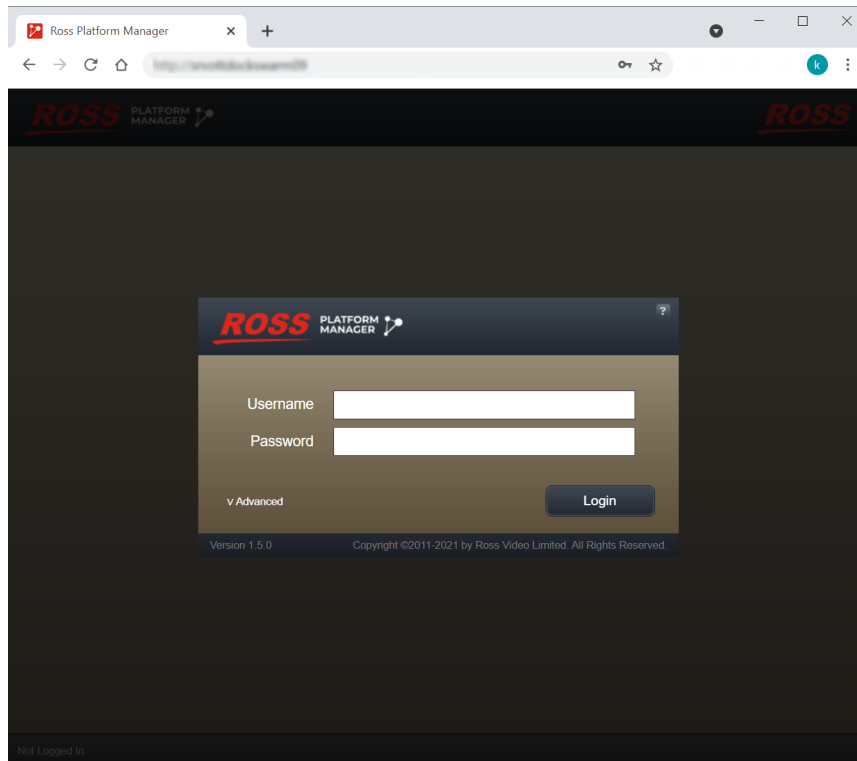


2. In the **Login** panel, enter your Ross Platform Manager login credentials in the **Username** and **Password** boxes.
3. Click or tap **Login**.

Ross Platform Manager opens.

- ★ If a message indicates that the system is in maintenance mode, a system administrator must establish a database connection before you can log in as a Ross Platform Manager user.

To close Ross Platform Manager

- On the main toolbar, click or tap the  **Logout** icon.

Explore the Ross Platform Manager User Interface

The Ross Platform Manager user interface consists of a main toolbar and various types of workspace panels that open as required.

- ★ Ross Platform Manager is a suite of tools that has many optional features. The Ross Platform Manager Online Help system describes all Ross Platform Manager features, but the options available to you depend on which features your organization has purchased and the user permissions that your Ross Platform Manager administrator has granted to your user account. If you want to use a feature that you learned about from the Help system but is not visible, contact your Ross Platform Manager administrator.

Main Toolbar

The icons in the main toolbar enable you to open workspace panels to access almost all features of Ross Platform Manager. The icons that you can access from the main toolbar depends on the features your organization purchased and the user permissions that your Ross Platform Manager administrator assigned to your user account. Ross Platform Manager tailors the main toolbar to display the features available on the following supported devices:

- **Desktop Computer** — for an overview of the desktop computer main toolbar, refer to the following section “**Main Toolbar**” on page 2–3.

Using a Desktop Computer with Ross Platform Manager

The Ross Platform Manager user interface consists of a main toolbar and various types of workspace panels that open as required. Each type of panel opens in a pre-designated position in the Ross Platform Manager layout. You can open, close, resize, or move individual panels.














Main Toolbar

The icons in the main toolbar enable you to open workspace panels to work with Ross Platform Manager features. The icons available in the main toolbar depend on the features your organization purchased and the user permissions that your Ross Platform Manager administrator assigned to your user account.

When you want more space on your screen for Ross Platform Manager panels, press **Ctrl+F11** to hide the main toolbar. Press **Ctrl+F11** once again to show a hidden main toolbar.

The main toolbar may contain the following icons:

Table 2.1 Desktop Computer Main Toolbar Icons

Icon	Name	Description
	Browse Product Keys	Allows you to open the Product Key Manager and Product Key Summary interfaces. For more information, refer to the chapter “ Managing a Product Key ” on page 6–1.
	Releases	Opens the Release Manager interface. For more information, refer to the section “ Adding a Product to the Release Manager ” on page 8–2.
	Browse Configuration Snapshots	Opens the Snapshot Manager interface. For more information, refer to the section “ Taking a Snapshot of a Ross Platform Target ” on page 7–8.
	CustomPanel Manager	Opens the CustomPanel Manager interface. For more information, refer to the chapter “ Managing DashBoard CustomPanels ” on page 9–1.
	Browse Deployments	Opens the Deployment Manager interface. For more information, refer to the chapter “ Managing a Deployment ” on page 8–1.
	Browse Targets	Opens the Target Manager interface. For more information, refer to the chapter “ Managing a Target ” on page 7–1.
	Configuration	Opens the Configuration interface. For more information, refer to the chapter “ Configuring System Properties ” on page 5–1.
	Change Password	Enables you to change your Ross Platform Manager password. For more information, refer to the chapter “ Changing Your Password ” on page 12–1.
	Perspectives	Enables you to switch to a different perspective, or to manage perspectives. For more information, refer to the section “ Managing Perspectives ” on page 13–1.
	Visual Workflow Manager	Opens the Visual Workflow Manager interface. For more information, refer to the section “ Using the Visual Workflow Manager ” on page 7–8.
	Log Viewer	Opens the Log Viewer interface. For more information, refer to the chapter “ Using the Log Viewer ” on page 14–1.
	Help	Opens the Online Help system.
	Logout	End your current session and log out of Ross Platform Manager.

Panel Positions and Perspectives

When accessed from a desktop computer, the Ross Platform Manager user interface layout consists of the main toolbar and eight panel positions. Each panel position can contain various types of Ross Platform Manager panels. When panel positions are unoccupied, Ross Platform Manager optimizes the layout by expanding open panels to fill all available space.

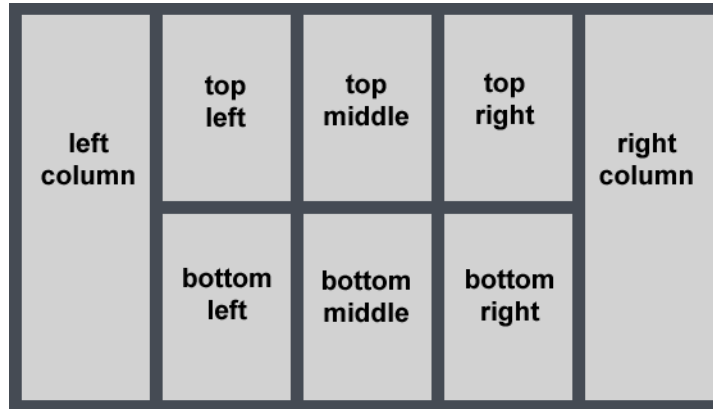


Figure 2.1 Arrangement of the Eight Panel Positions

A user perspective is a customized view of the Ross Platform Manager user interface. It is a mapping of Ross Platform Manager panel types to positions in the user interface layout.

Perspectives are especially useful for people who perform many different tasks in Ross Platform Manager. For example, an administrator may use one perspective for configuring Ross Platform Manager, and another perspective for monitoring Ross Platform Manager. All Ross Platform Manager users can create perspectives for their own use. Ross Platform Manager administrators can also create global perspectives available to all users.

★ Panels may not always appear exactly where you expect. As you open and close panels, Ross Platform Manager adjusts the layout to optimize use of the available space.

Default Panel Positions

When you first use Ross Platform Manager, it opens certain types of panels in certain panel positions by default. Ross Platform Manager continues to use the default layout until you move a panel or open a saved perspective.

By default, Ross Platform Manager does not occupy all panel positions. Ross Platform Manager optimizes the layout by expanding open panels to fill all available space.

For More Information on...

- creating and managing perspectives, refer to the section “**Managing Perspectives**” on page 13–1.


Move a Panel from One Layout Position to Another

You can move a panel to any of the available eight layout positions.

To move a panel from one layout position to another

1. Place the mouse pointer on the title of the panel to move, then click and hold the mouse button.
2. Drag the selected panel.

The layout guide opens.

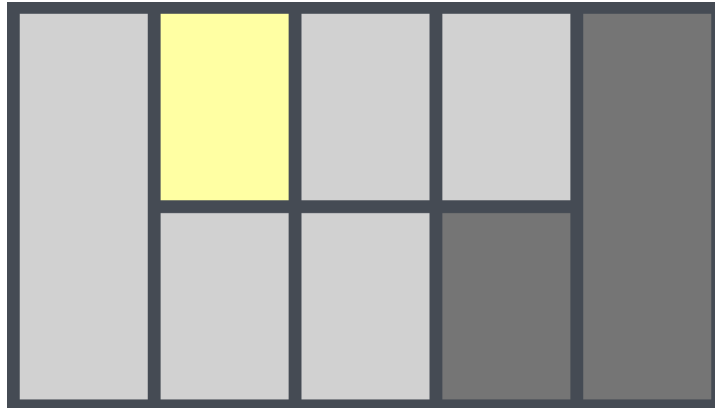

3. Drag the pointer over the layout guide to select the new position for your panel.

As you drag the pointer over the layout guide, the current drop position for the panel turns yellow. Light gray positions indicate unoccupied positions. Dark gray positions indicate occupied positions that can accept additional panels.

4. Release the mouse button to place the panel at the selected position, highlighted in yellow.

The panel opens at the selected position. When you select an occupied position, the panel opens as a new tab in the panel. After you have arranged panels to your liking, you can save the layout as a perspective.

For More Information on...

- saving a layout as a perspective, refer to the section “**Manage Perspectives**” on page 36–2.

Rearrange Panel Tabs Within a Layout Position

When a panel contains multiple panel tabs, you can rearrange the order of panel tabs within the layout position to customize the layout to suit your typical workflow.

To rearrange the order of panel tabs within a layout position

1. Place the mouse pointer on the title of the panel tab to move, then click and hold the mouse button.
2. Drag the selected panel tab within the tab row at the top of the layout position.

As you drag the pointer over the tab row, a dotted rectangle indicates the current drop position for the selected panel tab. If the rectangle surrounds a tab name, the drop position is to the left of that tab.

3. When the dotted rectangle indicates the desired position, release the mouse button to drop the panel tab.

You can also move a panel to a different layout position by dragging and dropping the panel name tab into the tab row of the destination panel. After you have arranged panel tabs to your liking, you can save the layout as a perspective.

Navigating within Panels


This section describes how to resize and close panels and how to navigate within column-based panels.

To resize a panel

1. Hover the mouse pointer over an edge or corner of the panel until the resizing icon displays.
2. Click and drag the edge or corner to resize the panel.

★ Ross Platform Manager does not save custom panel sizing as part of a perspective.

To close a panel

- Click the  **Close** icon in the top right corner of the panel.

When a layout position contains more than one open panel, only the current panel closes.

Entering Text for Right-to-Left Languages

When you enter text in Ross Platform Manager using a right-to-left language, text entry starts from the right of a text box and continues to the left as you enter text. Arabic is one of the most widespread right-to-left languages of modern times.

To enter text in a right-to-left language:

1. In the system settings for your desktop computer or mobile device, select a right-to-left language for the system language or input keyboard.
2. Click in a Ross Platform Manager text box.
3. Enter your text.

Text starts from the right of the text box and continues to the left as you type. To return to left-to-right text entry, select a left-to-right language for the system language or input keyboard.

Monitoring the System

Ross Platform Manager system monitors enable you to quickly view the health of your Ross Platform Manager system. If your Ross Platform Manager falters, you can use system monitors to help diagnose the cause of the system fault. Along with monitoring the health of your Ross Platform Manager system, you can also monitor and control the users connected to your Ross Platform Manager system.

This chapter discusses the following topics:

- Monitor System Health
- User Defined System Monitors
- Monitor and Control Connected Users
- Manage the Ross Platform Manager SNMP Agent
- Managing the Audit Log

Monitor System Health

As a Ross Platform Manager administrator, you can monitor the health of your Ross Platform Manager system through the Configuration window of Ross Platform Manager.


★ You cannot monitor Ross Platform Manager from a mobile device. The Configuration window is only accessible from a desktop computer.

To monitor system health


1. Use your Ross Platform Manager administrator credentials to log in to the Ross Platform Manager web page.

The default administrator login credentials are as follows:

- **Username** — `root`
- **Password** — `password`

2. On the main toolbar, click the  **Configuration** icon. If the **Configuration** icon is not visible, you are not an administrator and cannot configure the server.


The **Configuration** window opens.

3. On the **Configuration** window toolbar, click the  **System Monitor** icon.

The **System Monitor** panel opens.


4. Click the **System Health** tab.

The **System Health** tab opens.

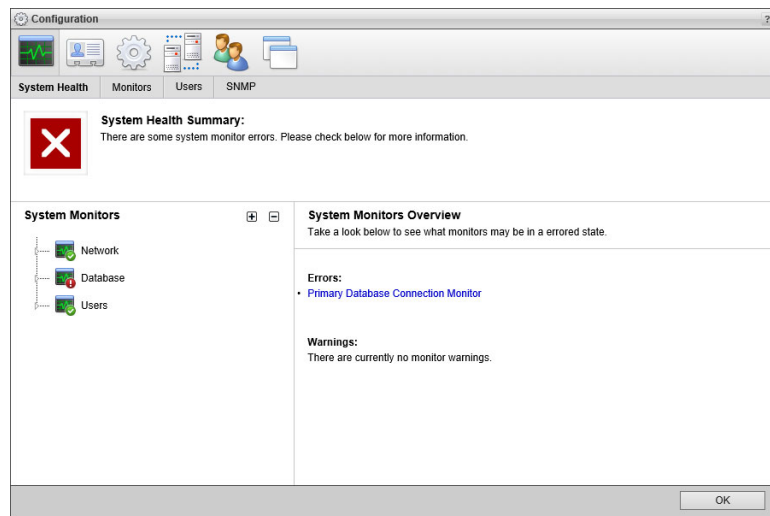

The **System Health** Summary field displays a description of the current overall state of the Ross Platform Manager system. The monitors in the **System Monitors** tree view report details about the state of the Ross Platform Manager system.


- Double-click a **folder** in the **System Monitors** tree view to open the folder and display the monitors contained in the folder.



The icon in the lower right corner of System Monitors tree view nodes indicate the following health levels:

- — **Healthy**
- — **Warning**
- — **Error**

- Click a monitor in the **System Monitors** tree view to view health details reported by the selected monitor.

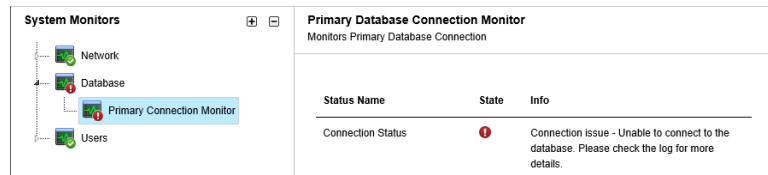

User Defined System Monitors

Ross Platform Manager enables to add your own monitors to monitor the remaining storage space on a disk or the connectivity between your Ross Platform Manager system and a web site. The Monitors tab of the System Monitor panels enables you to add, edit, and delete user defined monitors.

To add a user defined monitor to the System Health tab

- On the **Configuration** window toolbar, click the **System Monitor** icon.
The **System Monitor** panel opens.
- Click the **Monitors** tab.
The **Monitors** tab opens.
- Click **Add**.
The **Create New System Monitor** page opens.
- Use the **Monitor** list to select the type of monitor to add. The available monitor types are as follows:
 - **Disk Usage Monitor** — check a selected hard drive to make sure that the available storage does not fall below a set level.
 - **Internet Connectivity Monitor** — check that there is connectivity between the Ross Platform Manager system and a selected web site.
- Click **Next**.
Depending on the type of monitor you are adding, the **Add a Disk Usage Monitor** or **Add an Internet Connectivity Monitor** page opens.
- Define the selected monitor as follows:
 - Disk Usage Monitor**
 - In the **Name** box, enter a name for the monitor.
 - In the **Interval** box, enter the amount of time to wait between checks of available hard disk space.

- c. Use the list to the right of the **Interval** box to select **Minute(s)** or **Second(s)** as the time unit for the time entered in the **Interval** box.
- d. Use the **Drive** list to select the Ross Platform Manager computer hard drive to monitor.
- e. In the **Minimum Free Space** box, enter the minimum amount of disk space that the selected Drive must contain. The monitor reports an **Error** when the available space on a **Drive** drops below the set minimum disk space.
- f. Use the list to the right of the **Minimum Free Space** box to select **Gigabyte(s)** or **Megabyte(s)** as the disk space unit for the amount entered in the **Minimum Free Space After** box.

Internet Connectivity Monitor

- a. In the **Name** box, enter a name for the monitor.
 - b. In the **Interval** box, enter the amount of time to wait between connectivity checks for a web site.
 - c. Use the list to the right of the **Interval** box to select **Minute(s)** or **Second(s)** as the time unit for the time entered in the **Interval** box.
 - d. In the **URL** box, enter the web address (for example: <http://www.rossvideo.com>) of the web site that you want to check connectivity with the Ross Platform Manager system.
7. Click **Save**.

Ross Platform Manager adds the new monitor to the **System Monitor Management** list.

To edit a user defined monitor

1. In the **System Monitor Management** list, select the monitor to edit.
2. Click **Edit**.

Depending on the type of monitor you are editing, the **Edit Disk Usage Monitor** or **Edit Internet Connectivity Monitor** page opens.

3. Edit production monitor settings as required.
4. After completing the required monitor setting edits, click **Save**.

To delete a user defined monitor

1. In the **System Monitor Management** list, select the monitor to delete.
2. Click **Edit**.

A confirmation message opens, asking whether you want to delete the selected monitor. To keep the monitor, click **Cancel**.


3. In the confirmation message, click **OK**.

Ross Platform Manager deletes the selected monitor from the **System Monitor Management** list and the **System Monitors** tree view on the **System Health** tab.

Monitor and Control Connected Users

The Users tab of the System Monitor panel enables you to monitor and control the users connected to your Ross Platform Manager system.


To monitor users connected to a Ross Platform Manager system

1. On the **Configuration** window toolbar, click the  **System Monitor** icon.

The **System Monitor** panel opens.

2. Click the **Users** tab.

The **Users** tab opens.

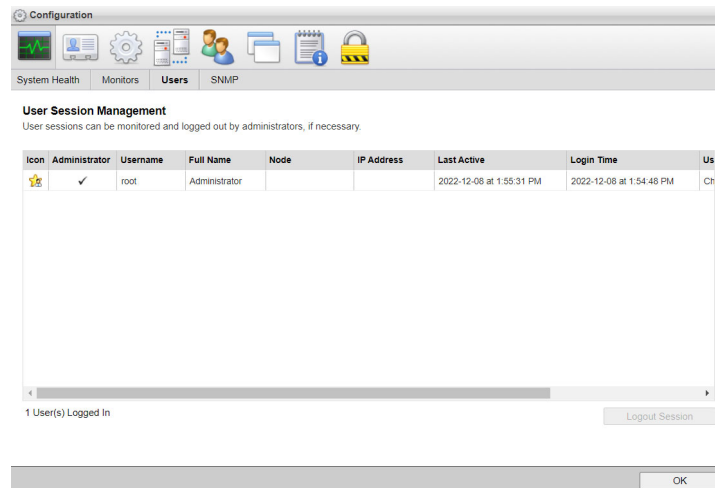

The **User Session Management** table displays the following information about the users connected to the Ross Platform Manager system:

- **Icon** — this column displays an icon that identifies the user logged into the Ross Platform Manager system.
- **Administrator** — this column displays a check mark for users that are Ross Platform Manager Administrators.
- **Username** — this column displays the Ross Platform Manager username of the user logged into the Ross Platform Manager system.
- **Full Name** — this column displays the first and last name of the user logged into the Ross Platform Manager system.
- **IP Address / Hostname** — this column displays the IP address and hostname of the computer that the user is using to work on the Ross Platform Manager system.
- **Last Active** — this column displays the date and time that the user last made a change to Ross Platform Manager.
- **Login Time** — this column displays the date and time that the user logged into the Ross Platform Manager system.

Delete User Sessions

When required, you can delete user sessions from your Ross Platform Manager system. Deleting a user session logs the selected user off of the Ross Platform Manager system. Ross Platform Manager saves user changes before logging the user off of the Ross Platform Manager system.

To delete a user session

1. In the **User Session Management** table, select the user session to delete.
2. Click **Delete User Session**.

A confirmation message opens, asking whether you want to delete the selected user session. To keep the session running, click **Cancel**.

3. In the confirmation message, click **OK**.

Ross Platform Manager deletes the selected user session and logs the user off of the Ross Platform Manager system.

Manage the Ross Platform Manager SNMP Agent

Ross Video uses two Simple Network Management Protocol (SNMP) agents to monitor the software and hardware of your Ross Platform Manager system. SNMP traps enable an agent to send unsolicited SNMP messages to the Network Management Station (NMS) to notify the station of significant events.

The Ross Platform Manager SNMP agent monitors the Ross Platform Manager system and reports significant events to your NMS as SNMP traps. Ross Platform Manager system hardware changes and errors are monitored by the Windows SNMP agent running on the Ross Platform Manager computer. The Ross Platform Manager SNMP agent forwards SNMP traps from the Windows SNMP agent to your NMS (**Figure 3.1**).





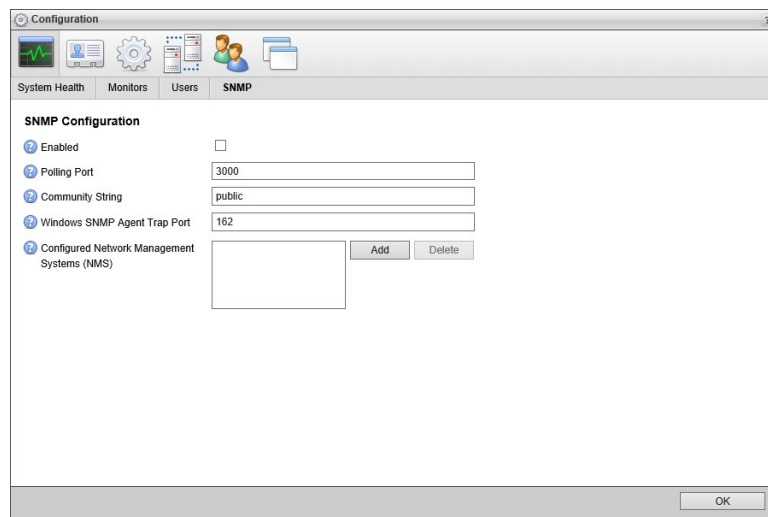
Figure 3.1 SNMP Connections

Configure the Ross Platform Manager SNMP Agent

The SNMP tab of the System Monitor panel enables you to configure the Ross Platform Manager SNMP agent to send SNMP trap messages to your NMS.

To configure the Ross Platform Manager SNMP agent

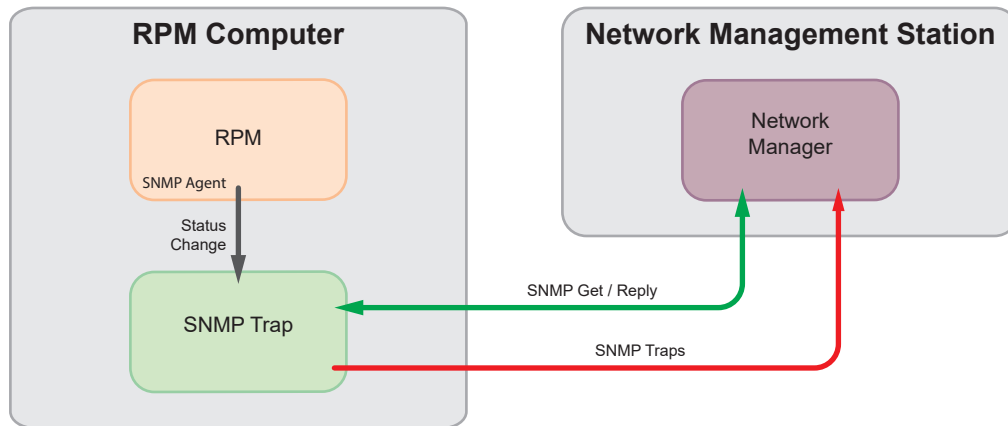1. On the **Configuration** window toolbar, click the  **System Monitor** icon.
The **System Monitor** panel opens.
2. Click the **SNMP** tab.
The **SNMP** tab opens.



3. Select the **Enabled** check box to send SNMP trap messages from the Ross Platform Manager SNMP agent to your NMS.
4. In the **Polling Port** box, enter the port number through which the Ross Platform Manager SNMP agent receives commands from and replies to the NMS.

5. In the **Community String** box, enter the password that allows your NMS to access the Ross Platform Manager SNMP agent on your Ross Platform Manager computer.
 - ★ When you change the **Community String** from `public` to your own password, you must enter your password on the NMS to allow access to your Ross Platform Manager computer.
6. In the **Windows SNMP Agent Trap Port** box, enter the port number that the Windows SNMP agent running on the Ross Platform Manager computer uses to send SNMP trap messages.

The Ross Platform Manager SNMP agent forwards SNMP trap messages from the Windows SMNP agent to your NMS through the NMS Trap Port.
7. To send SNMP trap message from the Ross Platform Manager SNMP agent to one or more NMSs, add NMSs as follows:
 - a. Click **Add** to the right of the **Configured Network Management Systems (NMS)** box.

An **Alert** dialog box opens.
 - b. Enter the IP address and port number (`<IP Address>:<Port Number>`) of an NMS to receive SNMP trap message from the Ross Platform Manager SNMP agent. For example:
`10.0.2.160:3000`
 - c. To add an additional NMS, repeat step `<UI_Element>a` to step `<UI_Element>b`.

Delete an NMS

When you no longer require an NMS, you can delete the NMS configuration.

To delete an NMS

1. In the **Configured Network Management Systems (NMS)** box, select the NMS to delete.
2. Click **Delete** to the right of the **Configured Network Management Systems (NMS)** box.

An **Alert** dialog box opens.
3. Click **OK** to delete the NMS.

Ross Platform Manager deletes the selected NMS from the **Configured Network Management Systems (NMS)** box.

Configure Your NMS for Ross Platform Manager

You must load the Ross Video and Ross Platform Manager Management Information Base (MIB) files into your NMS to enable it to interpret the SNMP trap messages it receives from a Ross Platform Manager SNMP agent. The Ross Platform Manager MIB file describes the SNMP trap messages sent by the Ross Platform Manager SNMP agent.

To load the Ross Video and OverDrive MIB files into your NMS

1. Get the **ROSS-VIDEO.mib** and **RWP-MIB.mib** files from one of the following locations:
 - Copy from the Ross Platform Manager system (`C:\Program Files\Ross Video\Ross Platform Manager\utilities\snmp`)
 - Download from the Ross Video web site (www.rossvideo.com)
2. Load the **ROSS-VIDEO.mib** file into your NMS.
3. Load the **RWP-MIB.mib** file into your NMS.


Configure the Windows SNMP Agent

To enable the Ross Platform Manager SNMP agent to forward hardware SNMP trap messages to your NMS, you need to configure an SNMP agent. You can use any type of SNMP agent.

To configure a Windows SNMP agent:

1. From the Windows Desktop, press **Windows Key+R**.

The **Run** dialog box opens.




2. In the **Open** box, type the following application name:

```
services.msc
```

3. Click **OK**.

The **Services** window opens.

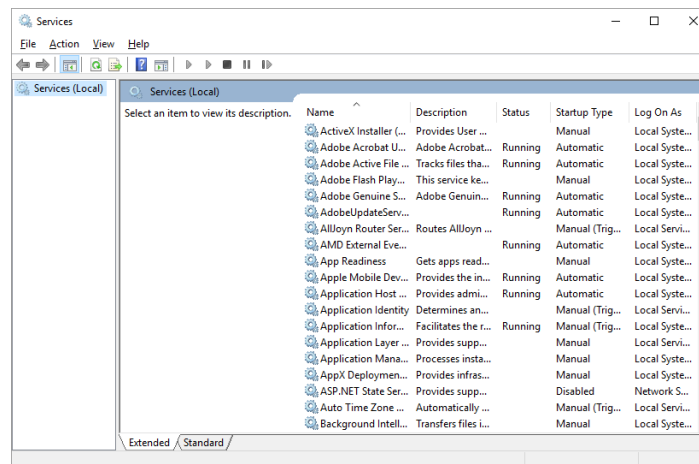


4. In the **Services** list, locate the **SNMP Service** service.

★ If you cannot find the **SNMP Service** service in the **Services** list, install the **SNMP Service** on your Ross Platform Manager computer.


- Right-click the **SNMP Service** service and select **Properties** from the shortcut menu.

The **SNMP Service Properties** dialog box opens.

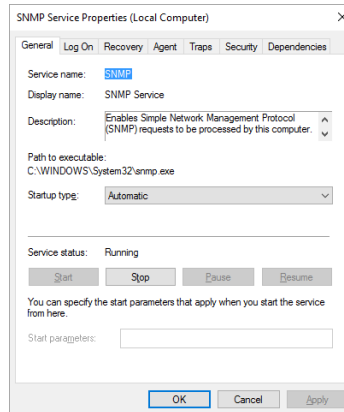

- Click the **Traps** tab.

The **Traps** tab opens.

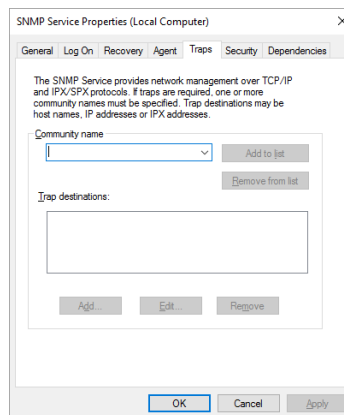


- In the **Community name** box, enter the password that you set for the **Community String** in step <UI_Element>5 of the procedure “**To configure the Ross Platform Manager SNMP agent**” on page 3–7.

- Click **Add to list**.

- In the **Trap destinations** section, click **Add**.

The **SNMP Service Configuration** dialog box opens.



- In the **Host name, IP or IP address** box, enter localhost.

- Click **Add**.

The **SNMP Service Configuration** dialog box closes.

- In the **SNMP Service Properties** dialog box, click **OK**.

The **SNMP Service Properties** dialog box closes.

- In the **Services** window, click **Restart** for the **SNMP Service** service.

- Use the **File** menu to select **Exit**.

The **Services** window closes.


Managing the Audit Log

Ross Platform Manager automatically records occurrences of failed login attempts, successful logins, maintenance mode logins, and new target creations. The record of these occurrences can be viewed via the audit log. By accessing this record, you can track user and IP address logins, allowing you to improve the security of your system by blocking IP addresses if needed. The audit log feature is automatically enabled.

To access the audit log

1. Follow the file path

C:/Program Files/Ross Video/Ross Platform Manager/workspace/.metadata/logs

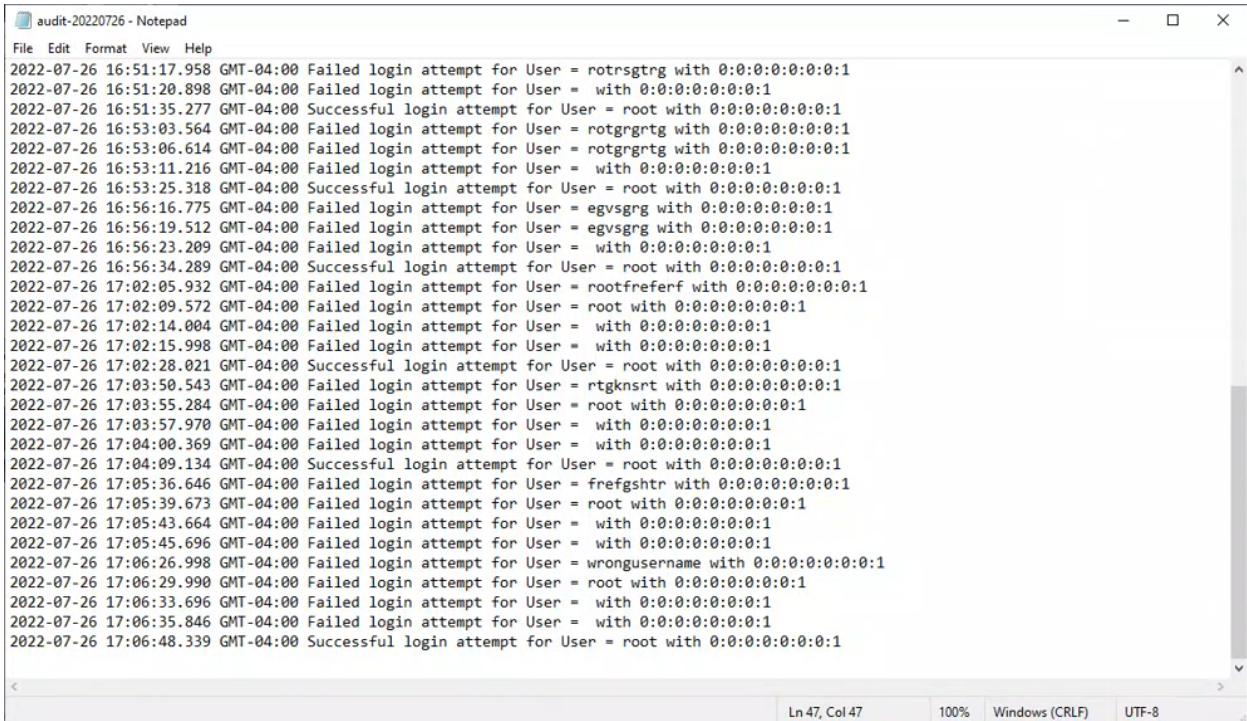

```
audit-20220726 - Notepad
File Edit Format View Help
2022-07-26 16:51:17.958 GMT-04:00 Failed login attempt for User = rotgrgrtg with 0:0:0:0:0:0:1
2022-07-26 16:51:20.898 GMT-04:00 Failed login attempt for User = with 0:0:0:0:0:0:1
2022-07-26 16:51:35.277 GMT-04:00 Successful login attempt for User = root with 0:0:0:0:0:0:1
2022-07-26 16:53:03.564 GMT-04:00 Failed login attempt for User = rotgrgrtg with 0:0:0:0:0:0:1
2022-07-26 16:53:06.614 GMT-04:00 Failed login attempt for User = rotgrgrtg with 0:0:0:0:0:0:1
2022-07-26 16:53:11.216 GMT-04:00 Failed login attempt for User = with 0:0:0:0:0:0:1
2022-07-26 16:53:25.318 GMT-04:00 Successful login attempt for User = root with 0:0:0:0:0:0:1
2022-07-26 16:56:16.775 GMT-04:00 Failed login attempt for User = egvsgrg with 0:0:0:0:0:0:1
2022-07-26 16:56:19.512 GMT-04:00 Failed login attempt for User = egvsgrg with 0:0:0:0:0:0:1
2022-07-26 16:56:23.209 GMT-04:00 Failed login attempt for User = with 0:0:0:0:0:0:1
2022-07-26 16:56:34.289 GMT-04:00 Successful login attempt for User = root with 0:0:0:0:0:0:1
2022-07-26 17:02:05.932 GMT-04:00 Failed login attempt for User = rootfreferf with 0:0:0:0:0:0:1
2022-07-26 17:02:09.572 GMT-04:00 Failed login attempt for User = root with 0:0:0:0:0:0:1
2022-07-26 17:02:14.004 GMT-04:00 Failed login attempt for User = with 0:0:0:0:0:0:1
2022-07-26 17:02:15.998 GMT-04:00 Failed login attempt for User = with 0:0:0:0:0:0:1
2022-07-26 17:02:28.021 GMT-04:00 Successful login attempt for User = root with 0:0:0:0:0:0:1
2022-07-26 17:03:50.543 GMT-04:00 Failed login attempt for User = rtgknsrt with 0:0:0:0:0:0:1
2022-07-26 17:03:55.284 GMT-04:00 Failed login attempt for User = root with 0:0:0:0:0:0:1
2022-07-26 17:03:57.970 GMT-04:00 Failed login attempt for User = with 0:0:0:0:0:0:1
2022-07-26 17:04:00.369 GMT-04:00 Failed login attempt for User = with 0:0:0:0:0:0:1
2022-07-26 17:04:09.134 GMT-04:00 Successful login attempt for User = root with 0:0:0:0:0:0:1
2022-07-26 17:05:36.646 GMT-04:00 Failed login attempt for User = frefgshtr with 0:0:0:0:0:0:1
2022-07-26 17:05:39.673 GMT-04:00 Failed login attempt for User = root with 0:0:0:0:0:0:1
2022-07-26 17:05:43.664 GMT-04:00 Failed login attempt for User = with 0:0:0:0:0:0:1
2022-07-26 17:05:45.696 GMT-04:00 Failed login attempt for User = with 0:0:0:0:0:0:1
2022-07-26 17:06:26.998 GMT-04:00 Failed login attempt for User = wrongusername with 0:0:0:0:0:0:1
2022-07-26 17:06:29.990 GMT-04:00 Failed login attempt for User = root with 0:0:0:0:0:0:1
2022-07-26 17:06:33.696 GMT-04:00 Failed login attempt for User = with 0:0:0:0:0:0:1
2022-07-26 17:06:35.846 GMT-04:00 Failed login attempt for User = with 0:0:0:0:0:0:1
2022-07-26 17:06:48.339 GMT-04:00 Successful login attempt for User = root with 0:0:0:0:0:0:1
Ln 47, Col 47 100% Windows (CRLF) UTF-8
```


User Preferences

The Ross Platform Manager administrator sets the default language, time zone, and font sizes for the all of the Ross Platform Manager users on a Ross Platform Manager system. Ross Platform Manager users can use the User Preferences tab of the System panel to override the default language, time zone, and font sizes set by the Ross Platform Manager administrator.

This chapter discusses the following topic:



- Set User Preferences


Set User Preferences

Ross Platform Manager users can individually override the default Ross Platform Manager user interface language, time zone, and font sizes set by the Ross Platform Manager administrator for all users of a Ross Platform Manager system.

★ You cannot user preferences from a mobile device, you must use a desktop computer to access the Configuration window.

To set the Ross Platform Manager UI language, time zone, and font sizes

1. The user preferences that you set depend on the credentials that you use to log in to the Ross Platform Manager web page.
 - **Administrator** — set the default Ross Platform Manager user interface language, time zone, and font sizes set for all Ross Platform Manager users. The default administrator login credentials are as follows:
 - › **Username** — root
 - › **Password** — password
 - **User** — set your own Ross Platform Manager user interface language, time zone, and font sizes that override the defaults set by your Ross Platform Manager administrator.
2. On the main toolbar, click the  **Configuration** icon.
The **Configuration** window opens.
3. On the **Configuration** window toolbar, click the  **Preferences** icon.
The **User Preferences** panel of the **Configuration** window opens.

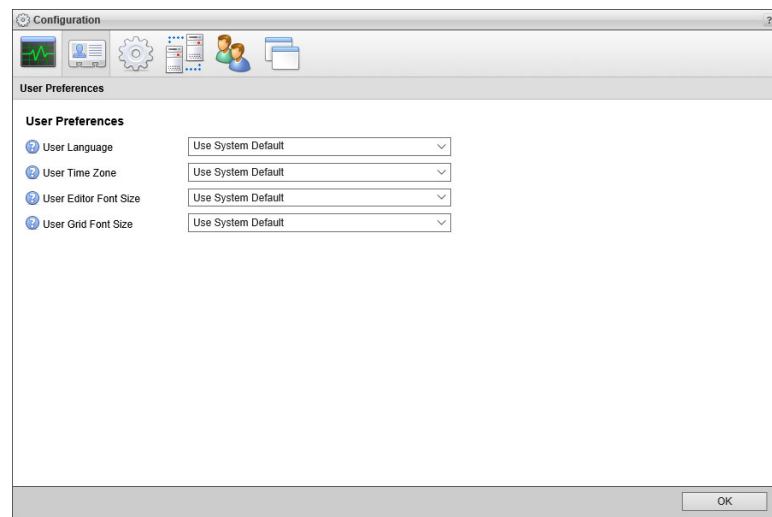

4. In the **User Preferences** tab, use the **User Language** list to select the user interface language that you want to use with Ross Platform Manager. Select **Use System Default** to use the language set by the Ross Platform Manager administrator.
5. Use the **User Time Zone** list to select the time zone which matches your physical location. Select **Use System Default** to use the time zone set by the Ross Platform Manager administrator.
6. Use the **User Editor Font Size** list to select the font size that you want Ross Platform Manager to display text in editor panels. You can select a font size from **6** to **32** points. Select **Use System Default** to use the editor font size set by the Ross Platform Manager administrator.

7. Use the **User Grid Font Size** list to select the font size that you want Ross Platform Manager to display text in panel grids. You can select a font size from **6** to **32** points. Select **Use System Default** to use the grid font size set by the Ross Platform Manager administrator.
8. Click **OK**.

The **Configuration** window closes.

Configuring System Properties

This chapter provides instructions for configuring the general system properties of your Ross Platform Manager system using the following tabs on the System configuration panel:

- **Database** — connect Ross Platform Manager to the database that stores application data.
- **File Sync** — view a list of Ross Platform Manager nodes in the cluster and their file synchronization statuses.
- **Licensing** — license Ross Platform Manager features.
- **System** — set default preferences for users of a Ross Platform Manager system.

This chapter discusses the following topics:

- Configure Database Connectivity
- Activating a Product Key for Ross Platform Manager Software
- Reactivating a Product Key
- Deactivating a Product Key
- Configure Default System Settings
- Viewing File Synchronization Information

Configure Database Connectivity

Ross Platform Manager administrators can use a desktop computer to configure Ross Platform Manager database connectivity settings through the Configuration window.

- ★ You cannot configure Ross Platform Manager from a mobile device. The Configuration window is only accessible from a desktop computer.

Database connectivity settings enable you to set the database used by Ross Platform Manager and the user account that Ross Platform Manager uses to connect with the database. Supported database drivers are listed in **Table 5.1** below.


Table 5.1 Supported Database Drivers

Deployment Pattern	MySQL v5.7	MySQL v8.0	postGres v10-14	MariaDB
Single node	RPM v3.4 and down	RPM v3.5 and up	All	RPM v3.5 and up
Redundant	RPM v3.4 and down	RPM v3.5 and up	Not supported	RPM v3.5 and up

To configure database connectivity

1. Click the **Database** tab.

The **Database** tab opens.

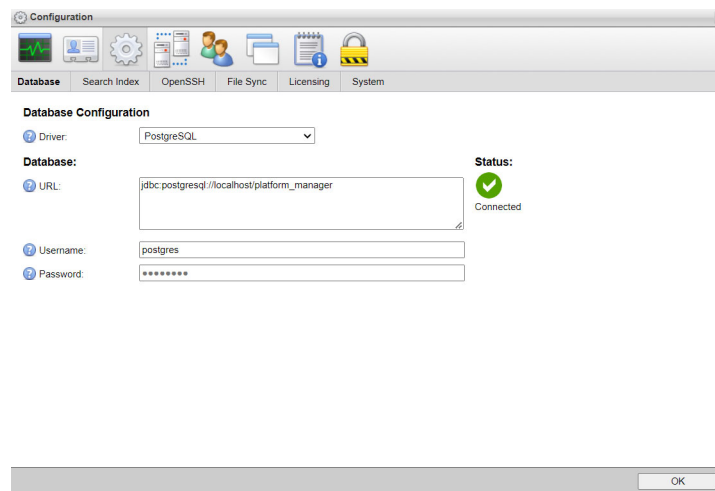

2. Use the **Driver** list to select the database driver used to connect to the Ross Platform Manager Database.
3. In the **URL** box, enter the JDBC URL that connects your Ross Platform Manager system with the Ross Platform Manager Database. For example, for a database named Ross Platform Manager on PostgreSQL, use the following URL:

```
jdbc:postgresql://localhost/platform_manager
```

4. In the **Username** box, enter the username that Ross Platform Manager uses to access the database.
5. In the **Password** box, enter the password associated with the username.
For security purposes, dots replace the entered password.
6. In the bottom toolbar, click **OK**.


The **Configuration** window closes.

Activating a Product Key for Ross Platform Manager Software

Ross Video uses product keys to manage user licenses for Ross Platform Manager. You can obtain a Ross Platform Manager product key from Ross Video Technical Support.

- ★ When you activate a Ross Platform Manager software product key, your Ross Platform Manager computer must contact the Ross Video Activation Server.


To activate a Ross Platform Manager product key

1. Verify that the Ross Platform Manager computer is able to connect to the Internet.
2. On the **Configuration** window toolbar, click the  **System** icon.

The **System** panel opens.

3. Click the **Licensing** tab.

The **Licensing Configuration** tab opens.

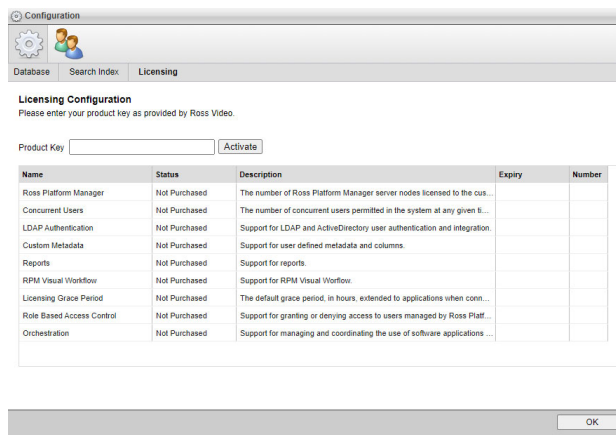


4. Obtain a Ross Platform Manager product key from Ross Video Technical Support.
5. In the **Product Key** box, enter the product key obtained from Ross Video Technical Support.
6. Click **Activate**.






After activating the entered product key, an **Alert** dialog box opens requesting a web browser window refresh.

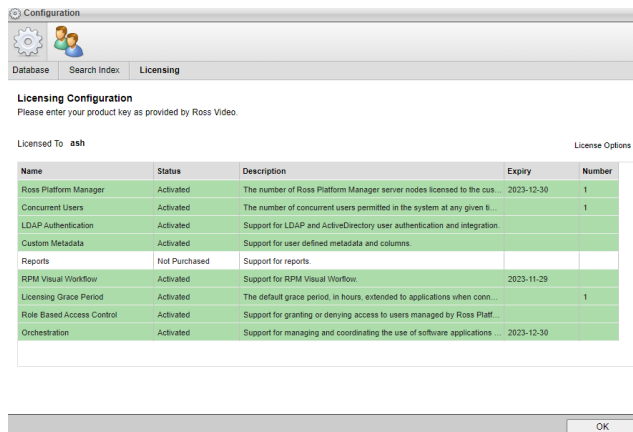7. Click **OK**.

The **Alert** dialog box closes and the **Licensing Configuration** tab updates to display the feature licenses associated with the activated product key.



The **Status** column displays one of the following states:

Background	Status	Description
 Green	Active	The feature is active and available to Ross Platform Manager users.
 Yellow	Expires in # days	The feature availability for Ross Platform Manager users expires in the displayed number of days.
 Red	Expired	The feature has expired and is no longer available to Ross Platform Manager users.
 Red	Invalid MAC	The feature license key is invalid for the active network interface card of the Ross Platform Manager computer.
 White	Not Purchased	The feature is not accessible to Ross Platform Manager users, but it is available for purchase.

8. Click **OK**.

The **Configuration** dialog box closes.

9. Refresh your web browser window.

Ross Platform Manager adds icons to the toolbar for the newly activated features, making the features accessible to Ross Platform Manager users.


For More Information on...

- contacting Ross Video Technical Support, refer to the section “**Contacting Technical Support**” on page 1–4.

Reactivating a Product Key

After purchasing new features for a Ross Platform Manager system, the Ross Platform Manager product key requires a reactivation to make the purchased features available to Ross Platform Manager users.

To reactivate a Ross Platform Manager product key

1. On the **Configuration** window toolbar, click the  **System** icon.

The **System** panel opens.

2. Click the **Licensing** tab.

The **Licensing Configuration** tab opens.

3. Click the **License Options** link.

The **Product Key** field displays the currently activate product key.

4. Click **Reactivate**.

After reactivating the product key, an **Alert** dialog box opens requesting a refresh of the web browser window.

5. Click **OK**.

The **Alert** dialog box closes and the **Licensing Configuration** tab is updates to display with new feature licenses associated with the reactivated product key.

6. Click **OK**.

The **Configuration** dialog box closes.


7. Refresh your web browser window.

Ross Platform Manager adds icons to the toolbar for the newly activated features, making the features accessible to Ross Platform Manager users.

Deactivating a Product Key

When you want to move Ross Platform Manager software on another computer, you must first deactivate the Ross Platform Manager software on the current Ross Platform Manager computer.

To deactivate a Ross Platform Manager product key

1. On the **Configuration** window toolbar, click the  **System** icon.

The **System** panel opens.

2. Click the **Licensing** tab.

The **Licensing Configuration** tab opens.

3. Click the **License Options** link.

The **Product Key** field displays the currently activate product key.

4. Click **Deactivate**.

After deactivating the product key, an **Alert** dialog box opens.

5. Click **OK**.

The **Alert** dialog box closes and the product key shown in the **Product Key** box deactivates. You can use the deactivated product key to activate Ross Platform Manager software on another computer.

Deactivating a product key un-licenses and removes Ross Platform Manager user access to all of the Ross Platform Manager features associated with the product key.


6. Click **OK**.

The **Configuration** dialog box closes.

Configure Default System Settings

Ross Platform Manager administrators can set the default language, time zone, font sizes, and data sharing folder for all of the users of a Ross Platform Manager system.


To set the default language, time zone, font sizes, and data sharing folder a Ross Platform Manager system

1. On the **Configuration** window toolbar, click the  **System** icon.

The **System** panel opens.

2. Click the **System** tab.

The **System** tab opens.

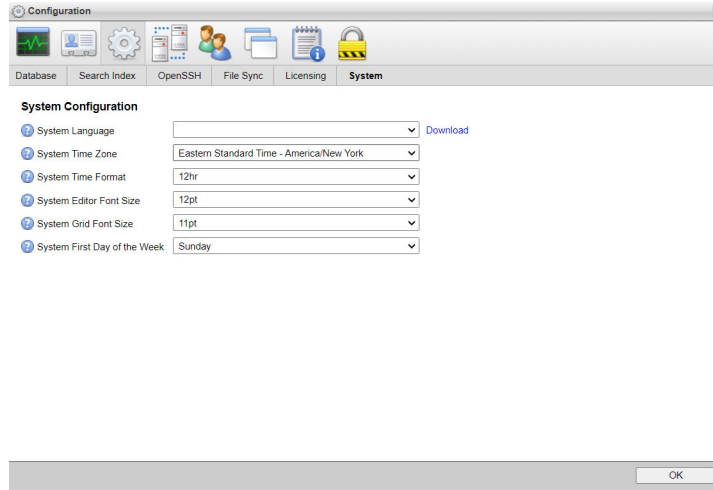

3. Use the **System Language** list to select the Ross Platform Manager user interface language for all users of a Ross Platform Manager system. Ross Platform Manager users can use the **User Preferences** tab of the **System** panel to override the selected **System Language**.

If you want to download a Ross Platform Manager language pack, follow these steps.

- a. Click the **Download** link.

The **Download Selected Language Pack** and **Download Empty Language Pack** buttons display below the **System Language** list.

- b. Click **Download Selected Language Pack** to download the selected **System Language** to your computer as a Ross Platform Manager language pack file.
- c. Click **Download Empty Language Pack** to download a template that you can use to create a Ross Platform Manager language pack file.
4. Use the **System Time Zone** list to select the time zone which matches the physical location of the Ross Platform Manager computer. Ross Platform Manager users can use the **User Preferences** tab of the **Preferences** panel to override the selected **System Time Zone**.
5. Use the **System Time Format** list to select the time format that matches the Ross Platform Manager Server computer. Ross Platform Manager users can use the **User Preferences** tab of the **Preferences** panel to override the selected **System Time Format**.
6. Use the **System Editor Font Size** list to select the font size, **6** to **32** points, that Ross Platform Manager uses to display text in editor panels. Ross Platform Manager users can use the **User Preferences** tab of the **Preferences** panel to override the selected **System Editor Font Size**.
7. Use the **System Grid Font Size** list to select the font size, **6** to **32** points, that Ross Platform Manager uses to display text in panel grids. Ross Platform Manager users can use the **User Preferences** tab of the **Preferences** panel to override the selected **System Grid Font Size**.
8. Use the **System First Day of the Week** list to select the first day of the week that will be used in calendars and date pickers. Ross Platform Manager users can use the **User Preferences** tab of the **Preferences** panel to override the selected **System First Day of the Week**.

Viewing File Synchronization Information

The File Sync tab in the System configuration panel allows the Ross Platform Manager administrator to view a list of the Ross Platform Manager nodes and their statuses. The File Sync tab (**Figure 5.1**) is made up of two tables:

- the Nodes table,
- and the Features table.

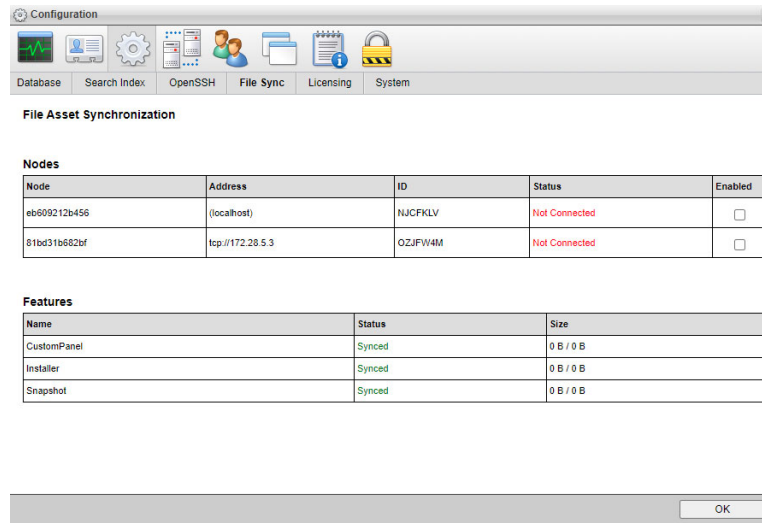



Figure 5.1 File Sync tab

File Sync Nodes Table

The Nodes table of the File Sync tab displays all of the nodes in the cluster. If a node is disconnected and removed from the cluster, it will also be removed from the Nodes table. For each node, the address, ID, and status will all be displayed in the table. There is also the Enabled column, which allows you to select whether or not file synchronization is enabled for a node.

To enable file sync for a node

1. On the **Configuration** window toolbar, click the  **System** icon.

The **System** panel opens.

2. Click the **File Sync** tab.

The **File Sync** tab opens.

3. In the **Enabled** column of the desired node, select the check box.

The **Status** column of the selected node updates to **Connected**, and files are now being synced between the selected node and other nodes in the cluster.

File Sync Features Table

The Features table of the File Sync tab displays all of the files that are being synced within the cluster, as well as their status and size. Note that these files will only be displayed in this table if Orchestration and/or CustomPanel features are licensed.

Managing a Product Key

Ross Platform Manager allows you to manage multiple product key licenses and feature activations from the Product Key Manager view. This workflow is available in an online or offline mode (when the Ross Platform Manager is installed on a computer that cannot reach the Ross Video Activation server at `activation.rossvideo.com`).

- ★ If you are using a computer that already has access to `activation.rossvideo.com`, use the Online Mode procedures. If you are using a computer that does not have access to `activation.rossvideo.com`, use the Offline Mode procedures.

This chapter discusses the following topics:

- Activating a Product Key
- Deactivating a Product Key
- Editing a Product Key's Notes
- Modifying Product Key Settings
- Managing Product Keys
- Generating a License Usage Report

Activating a Product Key


There are two methods to activate your product key, based on your network setup. Your Ross Platform Manager Server must have access to `activation.rossvideo.com` to activate the product license keys. If your Ross Platform Manager Server has access to the Internet, and can reach the `activation.rossvideo.com` server, then proceed to follow the Online Mode activation procedure.

If your Ross Platform Manager Server does not have access to the `activation.rossvideo.com` server, you must use the Offline Mode activation procedure.

★ Activation or deactivation files may only be used once.

To activate a product key (Online Mode)

1. Open **Ross Platform Manager**, and in the **Product Key Manager** click the  **Add Product Key** icon. The **Licensing Configuration** window opens.

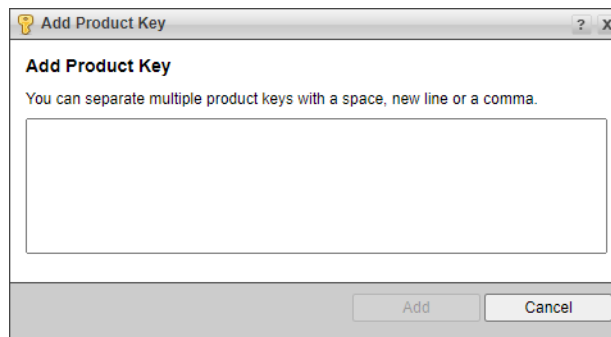


2. Paste the 15 digit product key provided by Ross video in the **Product Key** input field. You may add up to 100 product keys at once, separating each 15 digit product key with a delimiter (either a space, a new line, or a comma).





Note: Ensure there is no delimiter after the final product key. A delimiter after the final product key will cause RPM to expect another product key to be added, and the **Add** button will not be usable.

3. Click **Add**.

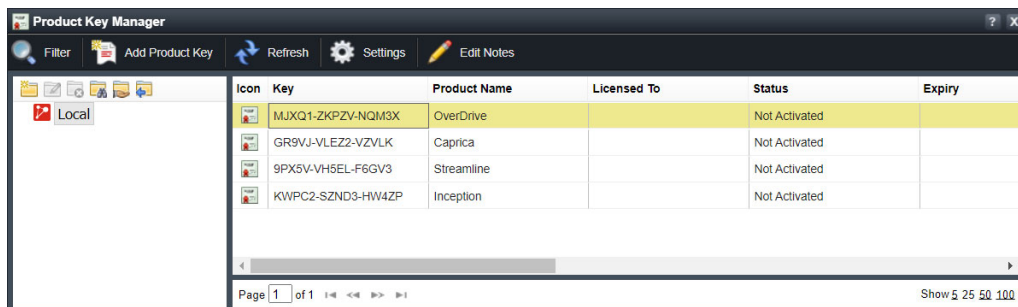If any product keys entered are invalid, the message “Error while adding the following product keys” will be displayed, followed by a list of the invalid product keys.


In the **Product Key Manager** you should see the product key(s) successfully added listed in the table, and the **Status** of **Not Activated** (in this example, MJXQ1-ZKPZV-NQM3X).







Icon	Key	Product Name	Licensed To	Status	Expiry
	MJXQ1-ZKPZV-NQM3X	OverDrive		Not Activated	
	GR9VJ-VLEZ2-VZVLK	Caprica		Not Activated	
	9PX5V-VH5EL-F6GV3	Streamline		Not Activated	
	KWPC2-SZND3-HW4ZP	Inception		Not Activated	

4. Double-click a product key just added in the **Product Key Manager** table.

The selected product key in the **Product Key View** opens.

- In the **Product Key View**, while the appropriate product key is selected, click the  **Activate** icon. The Licensing Configuration dialog opens.

- In the **Licensing Configuration** dialog, enter the product version for the current product instance and click **Activate**.
- In the **Product Key Manager**, verify that the product key status shows the new **Activated** status (highlighted in green).

Icon	Key	Product Name	Licensed To	Status	Expiry
	MJXQ1-ZKPZV-NQM3X	OverDrive	David	Activated	No Expiry
	GR9VJ-VLEZ2-VZVLK	Caprica		Not Activated	
	9PX5V-VH5EL-F6GV3	Streamline		Not Activated	
	KWPC2-SZND3-HW4ZP	Inception		Not Activated	

- Repeat from step 4 of this procedure onwards for each remaining product key added in step 2.

To activate a product key (Offline Mode)

- ★ You only need to follow this procedure if your Ross Platform Manager server does not have access to activation.rossvideo.com.


- Open **Ross Platform Manager**, and in the **Product Key Manager** click the  **Add Product Key** icon. The **Licensing Configuration (Offline)** window opens.

- Paste the 15 digit product key provided by Ross video in the **Product Key** input field. You may add up to 100 product keys at once, separating each 15 digit product key with a delimiter (either a space, a new line, or a comma).


Note: Ensure there is no delimiter after the final product key. A delimiter after the final product key will cause RPM to expect another product key to be added, and the **Add** button will not be usable.


- Click **Add**.


In the **Product Key Manager** you should see the product key listed in the table, and the **Status** of **Not Activated**.

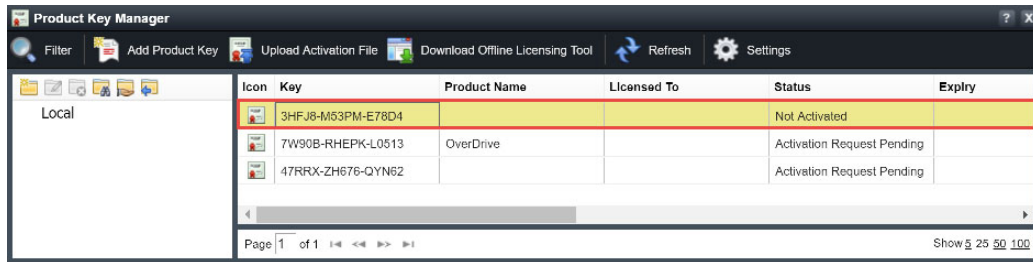

- Double-click a product key just added in the **Product Key Manager** table.
The selected product key in the **Product Key View** opens.

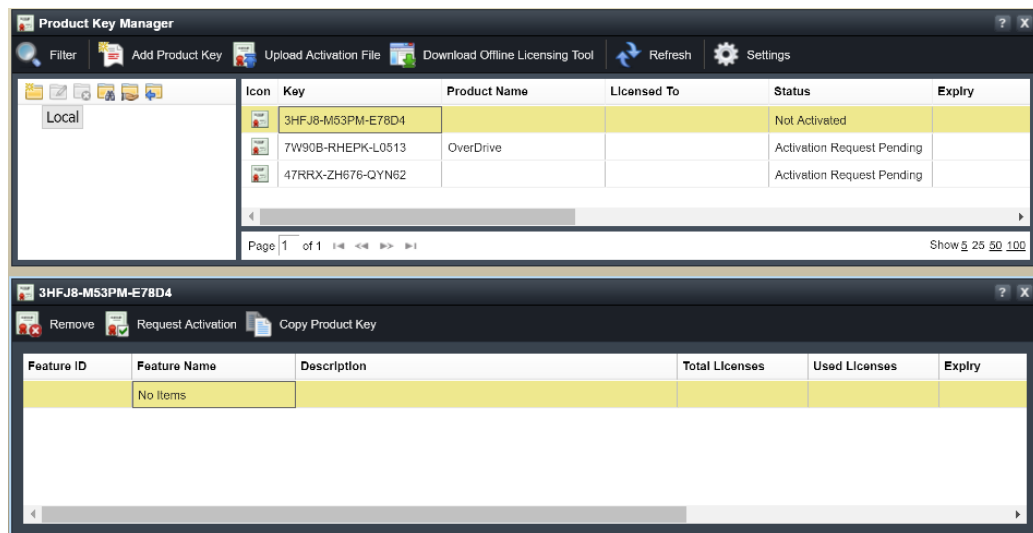


- In the **Product Key View**, click the  **Request Activation** icon.

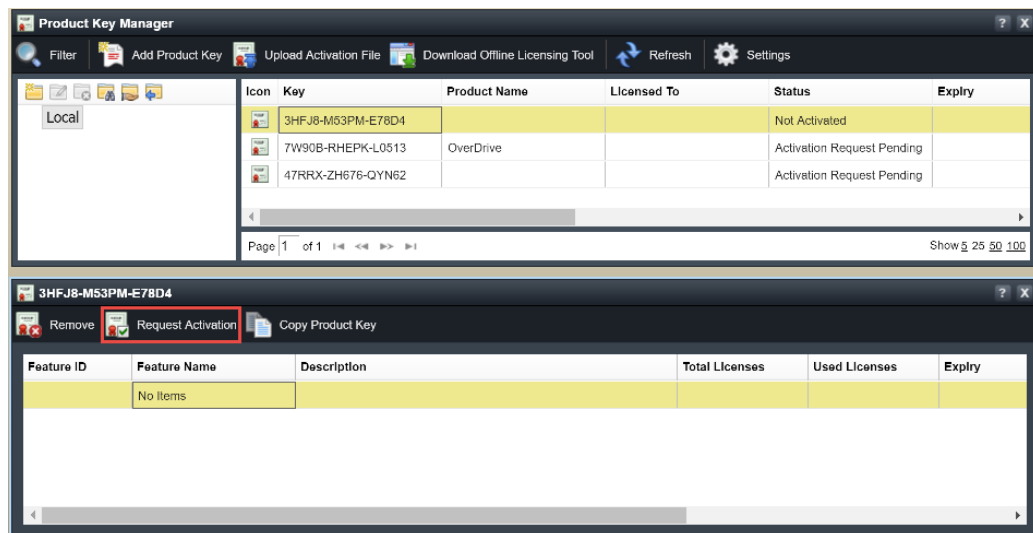



The **Licensing Configuration** dialog opens.

- In the **Licensing Configuration** dialog, enter the current **Product Version** and click **Activate**.

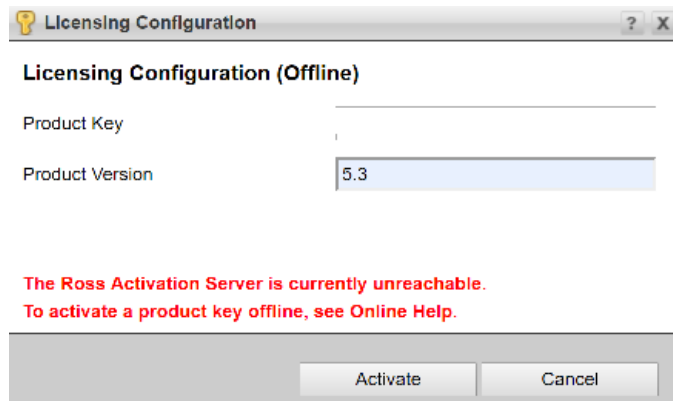


The **license.activation** file downloads.




7. You will need this file, and the **Ross Video Offline Licensing Tool**. Open the Product Key Manager and click the  **Download Offline Licensing Tool** icon.
- ★ The latest version of the Ross Offline Activation Tool is required to perform licensing activations or deactivations.

The Offline Licensing Tool downloads.




8. Make sure that the **license.activation** file, and the **Ross Video Offline Licensing Tool** installer are on a computer that have access to the **activation.rossvideo.com** server.
9. Double-click the **offline-licensing-tool.msi** file to install it.


The **Ross Offline Licensing Tool Setup Installer** opens.

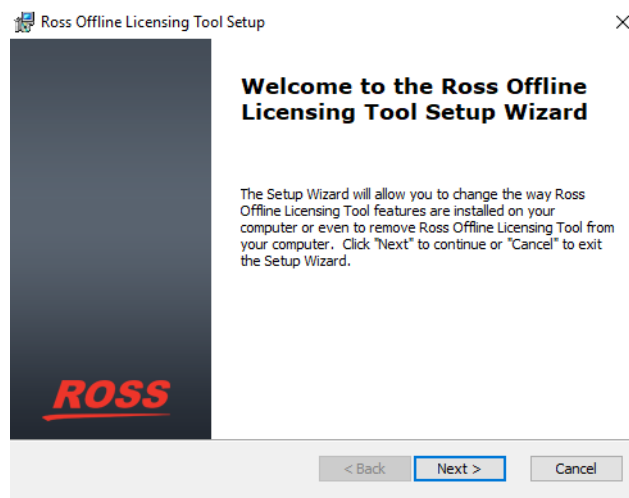

10. Click **Next** to go through each step of the wizard setup, using the default setting selections.

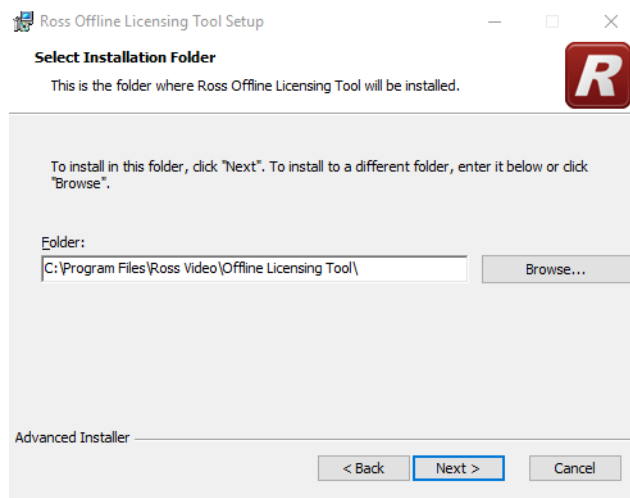


11. Click **Install**.

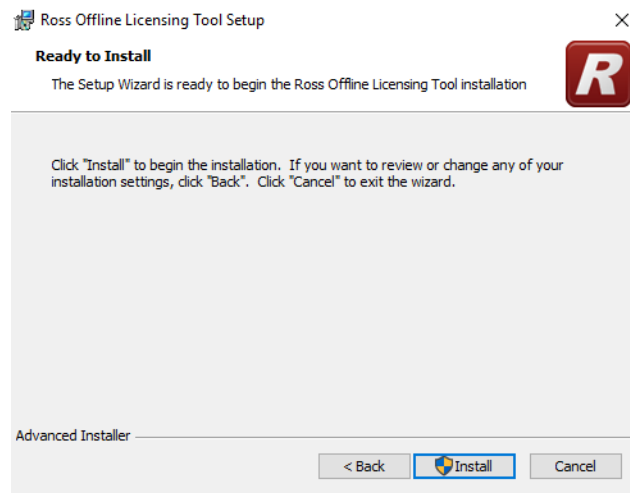


12. When the **Installation Complete** window appears, click **Finish**.


13. In the Windows Explorer, navigate to the directory location you selected in the installation and run the **Ross Offline Licensing Install.exe** application. The default directory location is: `C:\Program Files\Ross Video\Offline Licensing Tool`.

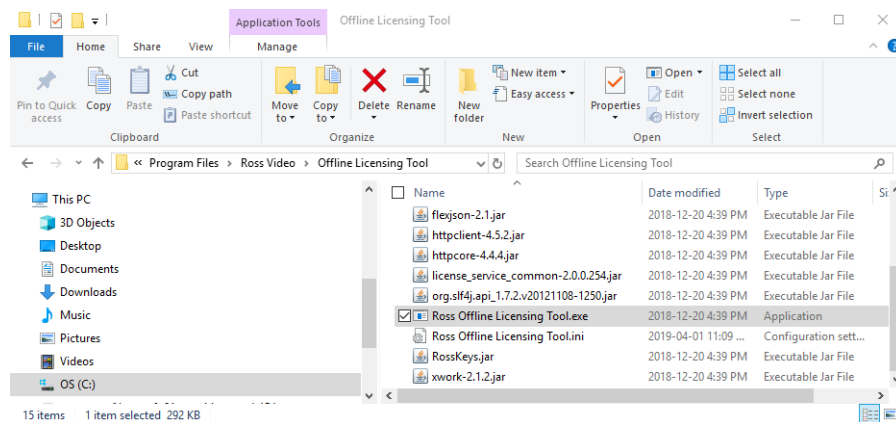


The **Ross Offline Activation Tool** opens.

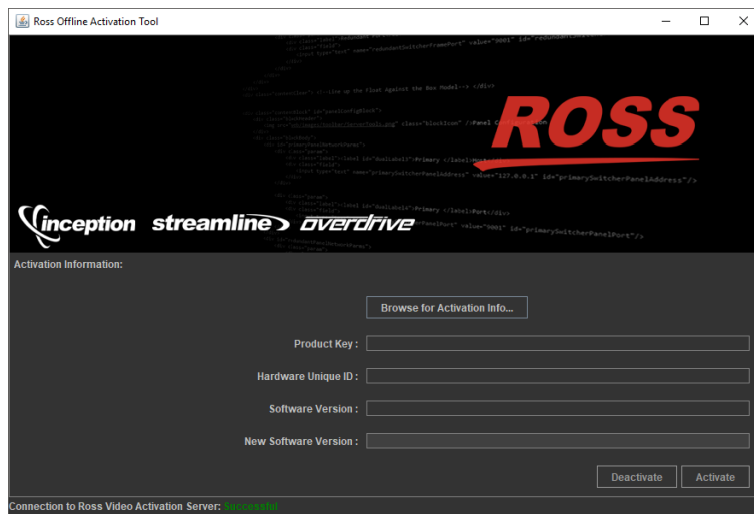

14. Click **Browse for Activation...** and select the **license.activation** file and click **Open**.

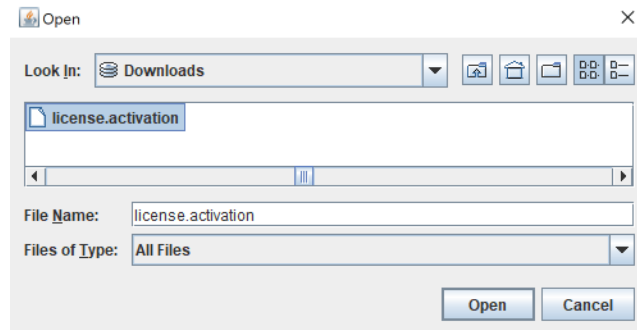



15. The **Activation Information** is automatically filled, and you can change the software version by entering a valid **New Software Version**. To activate this product key, select **Activate**.

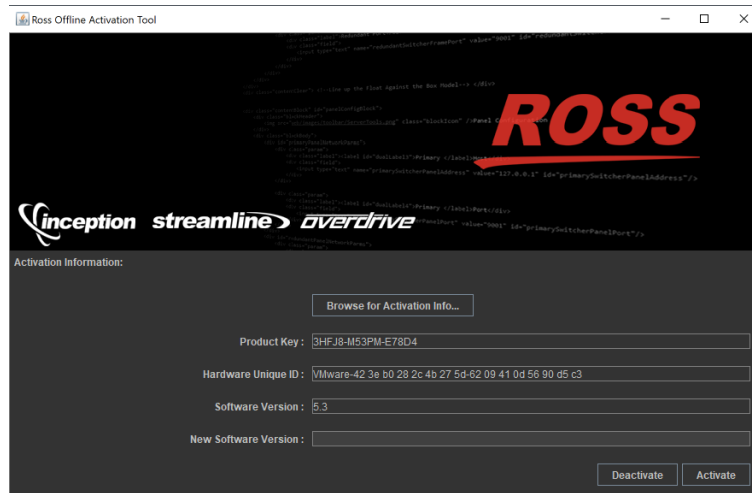


A **Specify a file to save license file** dialog opens.

16. Name the license file. In this example, **My_Caprica_License**.

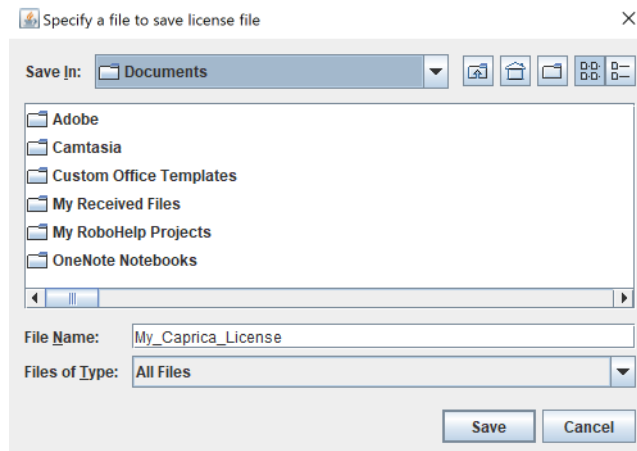


17. Now you can take the newly generated license file, and open the Ross Platform Manager Server, and in the **Product Key Manager**, click the  **Upload Activation File** icon.

The **Activation File** dialog box opens.

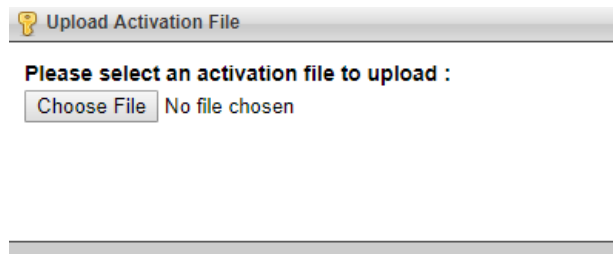


- Select **Choose File**, and select the activation file (in this case **My_Caprica_License**) that the **Ross Offline Activation Tool** generated.

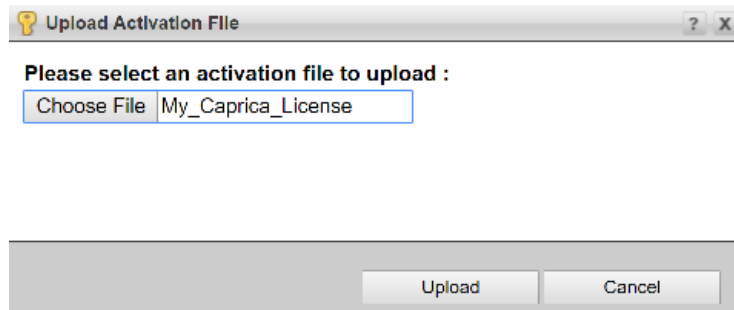

The **License Applied** alert opens.



- Confirm that the product key is active by checking the license status in the **Product Key Manager** view (status will be highlighted in green), and verify that the Product Key View shows all of the licenses included with the product key.

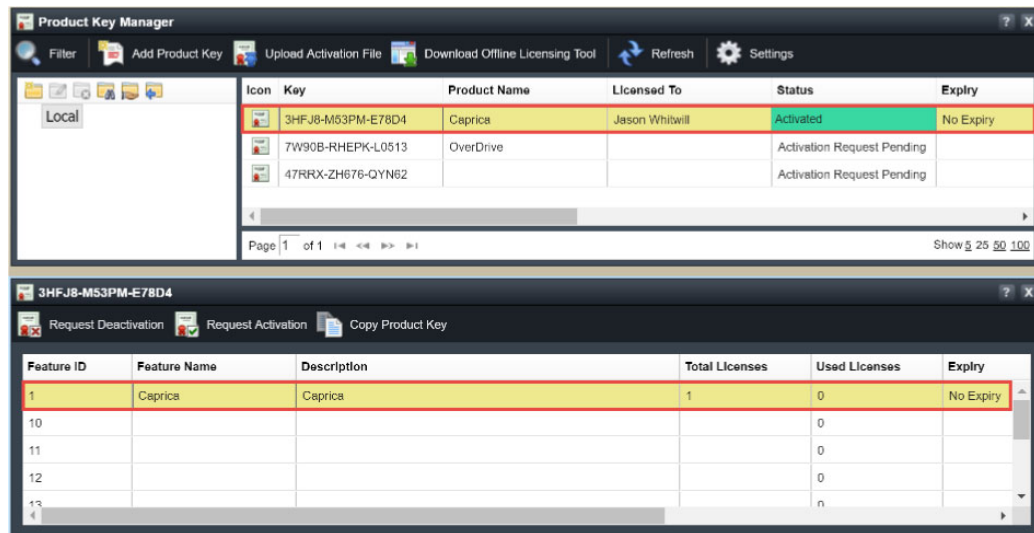

You can also double-click a license in the **Product Key View**, and it will open the activations for the selected license (in this example the “Caprica” license).



- Repeat from step 4 of this procedure onwards for each remaining product key added in step 2.


Deactivating a Product Key


There are two methods to deactivate your product key, based on your network setup. Your Ross Platform Manager Server must have access to **activation.rossvideo.com** to deactivate the product license keys. If your Ross Platform Manager Server has access to the Internet, and can reach the activation.rossvideo.com server, then proceed to follow the Online Mode deactivation procedure.

If your Ross Platform Manager Server does **not** have access to the **activation.rossvideo.com** server, you must use the Offline Mode activation procedure.

★ Activation or deactivation files may only be used once.


To deactivate a product key (Online Mode)

1. Open Ross Platform Manager, and open the **Product Key Manager**. Select the product key you would like to deactivate from the table and double-click to open the **Product Key View**.
2. In the **Product Key View**, click  **Deactivate**.

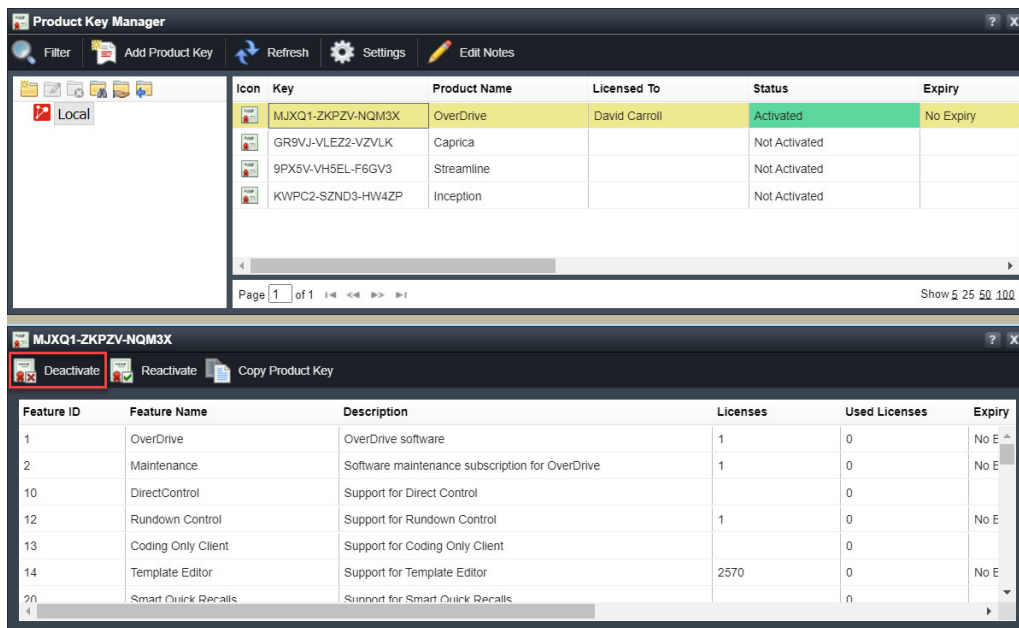

The deactivated **Product Key** is removed from the **Product Key Manager** corresponding **Product Key View**. The **Deactivate** and **Reactivate** icons are replaced by a **Remove** and **Activate** icon in the menu.

3. In the **Product Key View**, click  **Remove**.

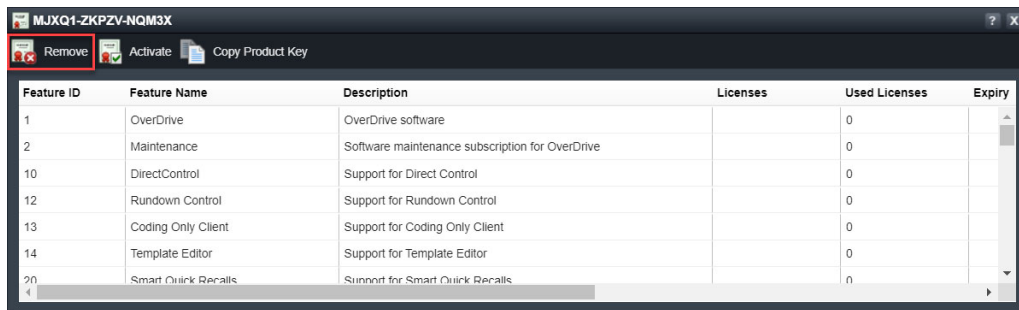


The product key is removed from the **Product Key Manager**, and the **Product Key View** closes.


To deactivate a product key (Offline Mode)

1. Open Ross Platform Manager, and open the **Product Keys > Product Key Manager**. Select the product key you would like to deactivate from the table and double-click to open the **Product Key View**.


The **Product Key View** of the product key you selected opens.

2. In the **Product Key View**, click  **Request deactivation**.

The **license.deactivation** file downloads.




3. 2. Open the **Ross Offline Activation Tool**, and click **Browse for Activation Info...** and then you can select the **license.deactivation** file that you generated in the previous step.

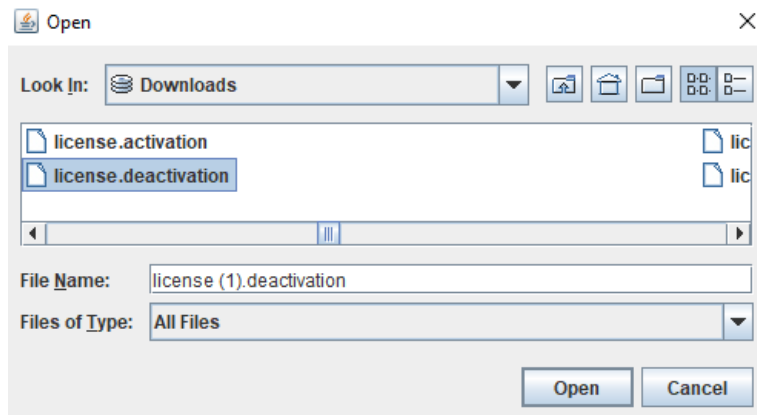

The deactivation is confirmed with a “Deactivated successfully” message.





4. Open Ross Platform Manager and in the Product Key Manager table you can confirm that the license **Status** is **Not Activated**. You can then double-click to open the license in the License Key Manager, and click the  **Remove** icon if you wish to remove the license from the list.

Editing a Product Key's Notes


The Notes column in the Product Key Manager can be used to display any information that may be relevant or helpful to make note of for each product key.

To edit the notes of a product key

1. Open Ross Platform Manager, and open the **Product Key Manager**.
2. Select the product key you would like to edit the note of from the table.
3. Click  **Edit Notes** in the main toolbar.

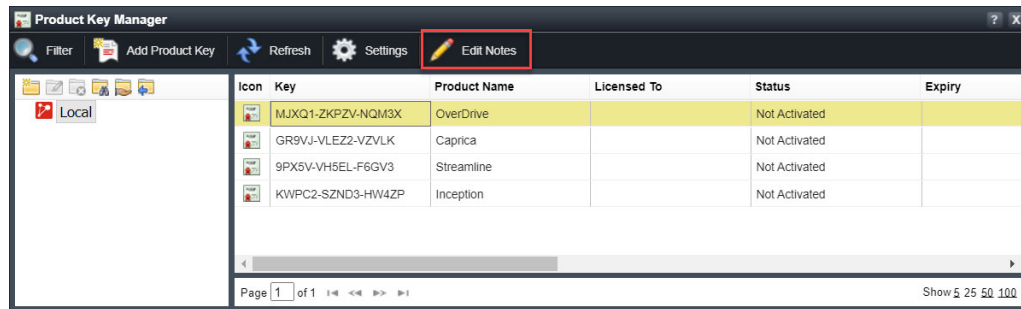

The **Edit Notes** dialog box opens.

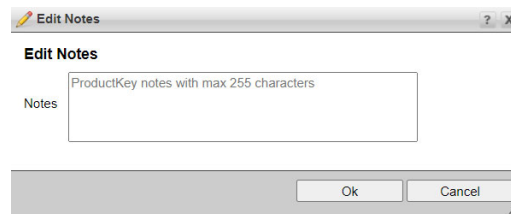


4. Enter the desired information into the **Notes** field. You may enter up to 255 characters.
5. Click **Ok**.

The **Edit Notes** dialog box closes, and your note has been saved to the selected product key. The note will display when the mouse is hovered over the **Notes** column.


Modifying Product Key Settings

You can choose the default settings for product keys, including selecting the settings for activations, reactivations upon version change, and synchronization.

To modify the product key settings

1. In the **Product Key Manager** window, click the  **Settings** icon on the main toolbar.

The **Product Key Settings** dialog box opens.

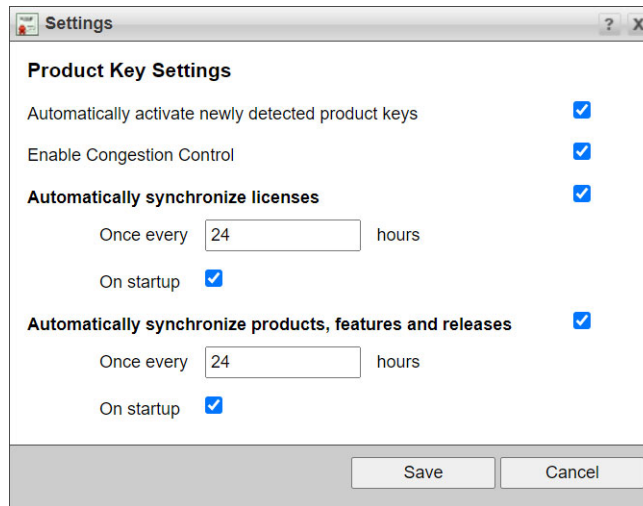

- For the Product Key Settings, you can configure the following options according to your preferences:


Setting	Description
Automatically activate newly detected product keys.	Select this check box if you would like newly added product keys to activate automatically.
Automatically reactivate product keys when version changes.	Select this check box if you want product keys to reactivate automatically when the version changes.
Automatically synchronize licenses.	Select to synchronize licenses. Set the following options: <ul style="list-style-type: none"> For the Once every < > hours entry field, enter a value (in hours) for how often you would like the Ross Platform Manager to synchronize licenses. <p>Note: Ross Platform Manager must be able to connect to the Ross Activation server, and this is not possible when running in offline mode.</p> <ul style="list-style-type: none"> On Startup - select this check box if you want to synchronize licenses upon startup.
Automatically synchronize products, features and releases.	Select this option to automatically synchronize products, features, and releases once every 24 hours. <ul style="list-style-type: none"> On Startup — select this check box if you want to synchronize features upon startup.

- Click **Save**.

Managing Product Keys

You can use the Product Key Summary panel to search for a product key or filter for a particular group of product keys that share the same properties, such as the same product type, feature, or licensed user.

To find a product key or group of similar product keys


- To open the **Product Key Summary** panel, in the RPM top menu click **Product Keys > Product Key Summary**.
- In the **Product Key Summary** panel, click  **Filter** and enter the product key, product name, feature, or the assigned user for the product key(s) that you wish to view.


★ You cannot search by **Total Count**, **Used Count**, **Host Name**, or **IP Address**.

Generating a License Usage Report

You can generate a license usage report for any product key in the Ross Platform Manager. The report includes a history of product key activation and release times, licensed users, and network details.

To Generate a License Usage Report

1. To generate a license report, in the RPM top menu click **Product Keys > Product Key Summary**.
2. Select the product key that you wish to get a report for, and click  **Export**. The **.csv** file will appear in your **Downloads** folder.
3. Open the report using **Microsoft Excel** or a software that supports **.csv** files.

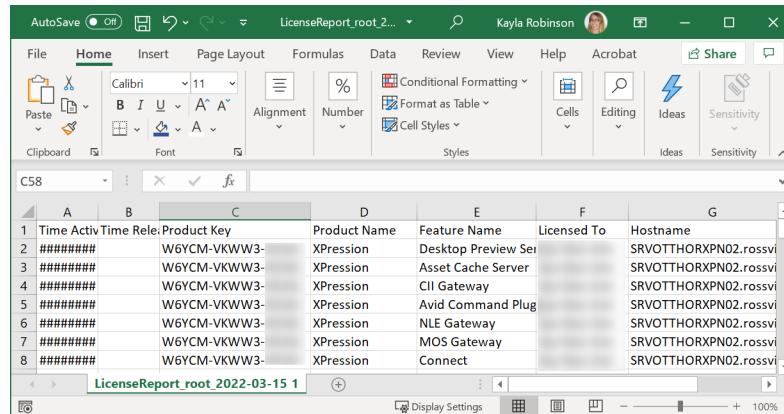

1	Time Activ	Time Rele	Product Key	Product Name	Feature Name	Licensed To	Hostname
2	#####		W6YCM-VKWW3-	XPression	Desktop Preview Ser		SRVOTTHORXPN02.rossvi
3	#####		W6YCM-VKWW3-	XPression	Asset Cache Server		SRVOTTHORXPN02.rossvi
4	#####		W6YCM-VKWW3-	XPression	CII Gateway		SRVOTTHORXPN02.rossvi
5	#####		W6YCM-VKWW3-	XPression	Avid Command Plug		SRVOTTHORXPN02.rossvi
6	#####		W6YCM-VKWW3-	XPression	NLE Gateway		SRVOTTHORXPN02.rossvi
7	#####		W6YCM-VKWW3-	XPression	MOS Gateway		SRVOTTHORXPN02.rossvi
8	#####		W6YCM-VKWW3-	XPression	Connect		SRVOTTHORXPN02.rossvi

Managing a Target

The Ross Platform Manager allows you to instantiate multiple different connections to target devices in the Target Manager. Examples of targets include static Windows or Linux hosts (on bare metal machines, VMs, or Amazon EC2 instances), Cloud hosts, and Ross Platform switchers (Carbonite or Acuity). Once a connection to a target is instantiated, the target must be authorized using a method that is suitable for the type of target.

This chapter discusses the following topics:


- Adding a Target
- Authorizing a Target
- Transitioning an SDPE Blade Target
- Copying Info from the Target Manager
- Taking a Snapshot of a Ross Platform Target
- Using the Visual Workflow Manager


Adding a Target

To start off, you'll add your target to the target manager by providing Ross Platform Manager with information about the target. When a target is added (even by another user), it will display automatically in the list of targets in the sidebar of the Visual Workflow canvas.

★ softGear deployments are supported by Linux targets, and XPression deployments are supported by Windows targets.

To add a Windows or Linux target

1. Open the Ross Platform Manager, and from the top menu under Orchestration, select the **Browse Targets** icon. The **Target Manager** opens.
2. To create a target, click  Add. The **Create Target** window opens.

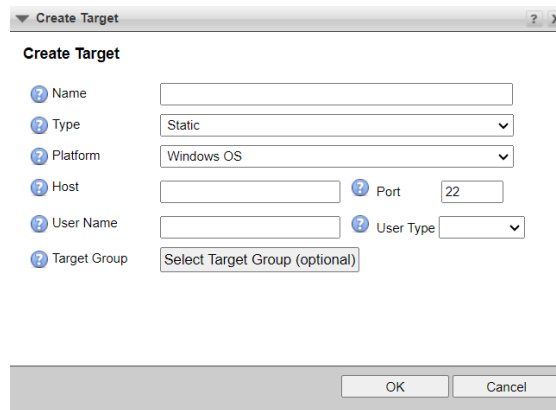




The 'Create Target' dialog box is titled 'Create Target' and has a close button (X) in the top right corner. It contains the following fields:

- Name: Text input field.
- Type: Dropdown menu with 'Static' selected.
- Platform: Dropdown menu with 'Windows OS' selected.
- Host: Text input field.
- Port: Text input field with '22' entered.
- User Name: Text input field.
- User Type: Dropdown menu.
- Target Group: Text input field with 'Select Target Group (optional)' placeholder.

At the bottom of the dialog are 'OK' and 'Cancel' buttons.

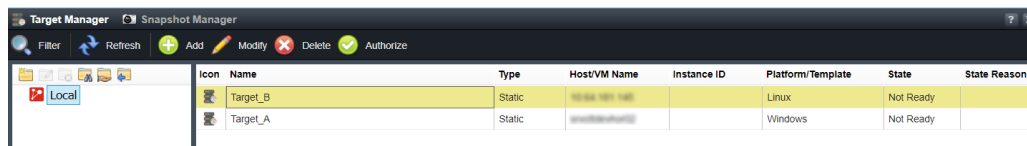
3. In the **Create Target** window, enter the following information:
 - **Name** — Enter a meaningful name for the target.
 - **Type** — Select **Static**.
 - **Platform** — Select either Windows OS or Linux OS.
 - **Host** — Enter your host name or IP address.
 - **Port** — Enter the port number for the target.
 - **User Name** — Enter the user name for the target.
 - **User Type** — Select whether the user account type is AD/LDAP or Local (optional).
 - **Domain** — Available when User Type is set to AD/LDAP. Use this field to enter the domain name (optional).
 - **Target Group** — Select a group for the target (optional).
4. Click **OK** to add the target.
5. Verify that your new target appears in the **Target Manager**.




Icon	Name	Type	Host/VM Name	Instance ID	Platform/Template	State	State Reason
	Target_B	Static	192.168.1.100		Linux	Not Ready	
	Target_A	Static	192.168.1.101		Windows	Not Ready	


★ If you have added a **Windows OS** target, the target will automatically be authorized and appear with **Ready State** if you have downloaded and executed the Open SSH script on the target device.



To add a Ross Platform target

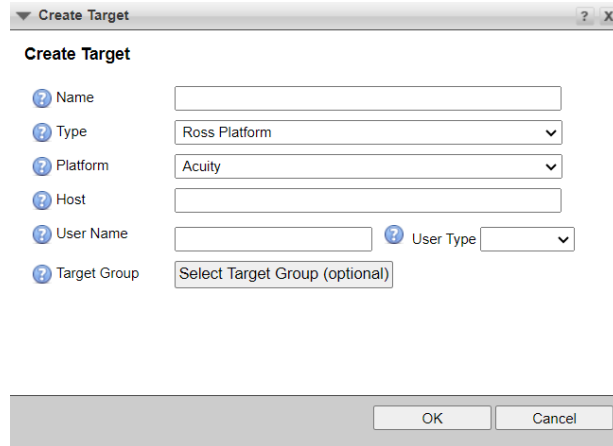1. Open the Ross Platform Manager, and from the top menu under Orchestration, select the **Browse Targets** icon. The **Target Manager** opens.
2. To create a target, click  Add.
The **Create Target** window opens.

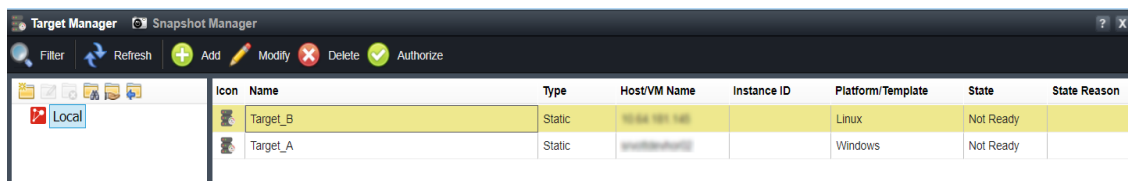


3. In the **Create Target** window, enter the following information:
 - **Name** — Enter a meaningful name for the target.
 - **Type** — Select **Ross Platform**.
 - **Platform** — Select **Acuity**, **Carbonite**, or **SDPE Blade**.
 - **Host/Instance Id** — Enter your host name or IP address.
 - **Port** — If the target is a **Carbonite**, enter the port number.
 - **User Name** — Enter the user name for your target.
 - **User Type** — Select whether the user account type is AD/LDAP or Local (optional).
 - **Domain** — Available when User Type is set to AD/LDAP. Use this field to enter the domain name (optional).
 - **Target Group** — Select a group for the target (optional).
4. Click **OK** to add the target.
5. Verify that your new target appears in the **Target Manager**.



Icon	Name	Type	Host/VM Name	Instance ID	Platform/Template	State	State Reason
	Target_B	Static	10.10.10.10	Target_B	Linux	Not Ready	
	Target_A	Static	10.10.10.10	Target_A	Windows	Not Ready	

To add a Cloud target

1. Open the Ross Platform Manager, and from the top menu under Orchestration, select the **Browse Targets** icon. The **Target Manager** opens.
2. To create a target, click  Add.
The **Create Target** window opens.

3. In the **Create Target** window, enter the following information:
 - **Name** — Enter a meaningful name for the target.
 - **Type** — Select **Cloud**.
 - **Platform** — The Platform will automatically be set to AWS.
 - **Instance Id** — Enter your EC2 instance ID.
 - **Host** — This field will be automatically populated with the host server’s private IP address.
 - **User Name** — Enter the user name for your target.
 - **User Type** — Select whether the user account type is AD/LDAP or Local (optional).
 - **Domain** — Available when User Type is set to AD/LDAP. Use this field to enter the domain name (optional).
 - **Target Group** — Select a group for the target (optional).
4. Click **OK** to add the target.
5. Verify that your new target appears in the **Target Manager**.

Authorizing a Target

Once a target has been added, it will need to be authorized in order to be eligible for use in a deployment. Targets with a Windows OS are automatically authorized if the Open SSH script is installed on the target device. Targets with a Linux OS will need to be authorized using a key-based or password-based method. Ross Platform targets need to be authorized using a password-based method.


Once Ross Platform Manager verifies that a target's operating system is available and successfully connects to it, the target will automatically move into **Ready State** in the **Target Manager**, signaling that it is eligible for a deployment.

To authorize a Windows target


★ This procedure can be completed before the target is added to the Target Manager. If you already have SSH installed on the machine, you are not required to follow this procedure.

1. Open the **Ross Platform Manager**, and from the top menu under **Tools**, select the **Configuration** icon.

The **Configuration** window opens.

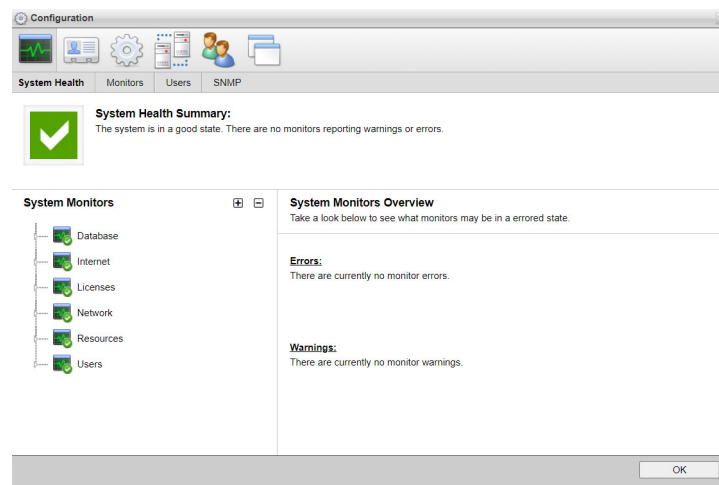

2. Select **System > OpenSSH** to open the OpenSSH download menu.

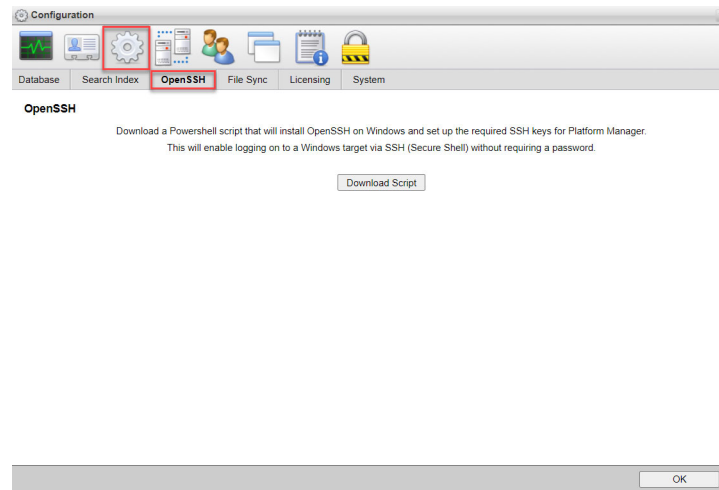

3. Select **Download Script** to download the OpenSSH Script.




The **openssh-download.zip** file containing the OpenSSH Script downloads.

4. Open the **README.txt** file included in the **openssh-download.zip** file.
5. Follow the instructions in the **README.txt** file to install the OpenSSH Script on the Windows target device.
6. In the Target Manager, select the Windows target by clicking on it.
7. Click **Authorize**.
8. Verify that the Windows target is in **Ready State**.

To authorize a Linux or Cloud target (key-based)


★ You must generate a .pem key file for the target device before following this procedure.

1. Select the Linux or Cloud target in the **Target Manager**.
2. Select **Authorize**.

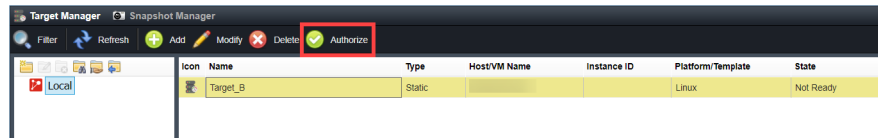

The **Authorize Target** window opens.

3. Select **Choose File** to upload the key file in .pem format.

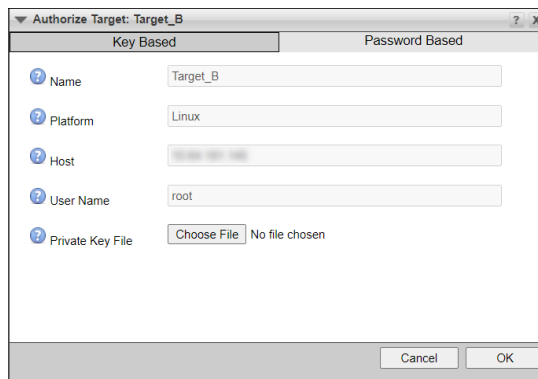

4. Verify that the correct key file is uploaded and click **OK**.
5. Verify that the Linux or Cloud target is in **Ready State** in the Target Manager.


If the **State** status shows **Not Ready** with the **Status Reason** “Failed to retrieve OS information: Auth fail”, there is an error in the key file, or the incorrect user name was used.

★ If you authorize a target with the key-based method, you will automatically be prompted to use the key-based method for future authorizations. You will no longer have access to password-based authorization.

To authorize a Linux, Cloud, or Ross Platform target (password-based)

★ Currently, you may only authorize a Ross Platform target using the password-based method.

1. Select the Linux, Cloud, or Ross Platform target in the **Target Manager**.
2. Click **Authorize > Password Based**.
3. Enter the password that you configured for your device.

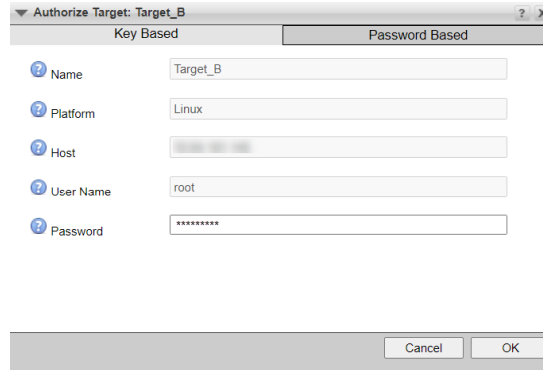

4. Click **OK**.
5. Verify that the target is in **Ready State** in the Target Manager.

Transitioning an SDPE Blade Target

Once you have added an SDPE Blade target in the Target Manager, you can transition the SDPE Blade between Carbonite and Acuity from the Ross Platform Manager.

To transition an SDPE Blade target between Carbonite and Acuity

1. Select an SDPE Blade target in the Target Manager by clicking on it.
2. Click **Transition**.

The SDPE Blade Target will take up to five minutes to transition.

The state column will reflect whether the SDPE Blade is currently in Carbonite or Acuity state.

Copying Info from the Target Manager

You may find that you need information about a target (for troubleshooting, for example). Rather than need to type out the information that is displayed in the Target Manager, you can copy the information from any cell in the Target Manager and have its contents available to paste anywhere you need.

To copy information from the Target Manager

1. Select the cell with the desired information from the **Target Manager**.

The selected cell is outlined in black and highlighted in yellow.

2. Press **Ctrl+C**.

The information from the selected cell is copied and ready to be pasted wherever desired.

Taking a Snapshot of a Ross Platform Target

You can capture a snapshot of a Ross Platform type target (Carbonite, Acuity, or SDPE Blade in Carbonite state). The snapshot will contain a working set of files for the target. You can view the snapshot and its associated files in the **Snapshot Manager**. Once you've taken a snapshot of a Ross Platform target, you can apply the snapshot back to the target in the **Snapshot Manager**.


★ RossTalk functionality must be enabled for Ross Platform Manager to save working set configuration files for switchers. RossTalk functionality will be automatically enabled for Carbonite and Ultrix Carbonite. For instructions on enabling RossTalk functionality for Acuity and Ultrix Acuity switchers, refer to the *Enabling RossTalk on Switchers* document.

★ You can only take a snapshot of an SDPE Blade target when it is in Carbonite mode.

To save a snapshot of a Ross Platform target

1. From the top menu of **Ross Platform Manager**, select **Target Manager**.
2. Select the **Ross Platform** target and once it is highlighted in yellow, click **Get Working Set**.

The **Switcher - Take Snapshot** dialog opens.

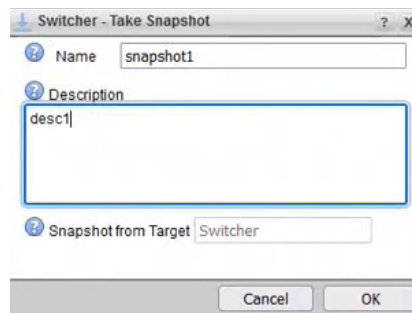



3. In the **Name** box, enter a name for the snapshot.
 4. In the **Description** box, enter a description of the snapshot.
- ★ Each working set snapshot is unique, and will not be overwritten if another snapshot is taken.
5. Click **OK**. Ross Platform Manager will then collect a configuration file from the target, which contains the current working set of files for the target.

Using the Visual Workflow Manager


The Visual Workflow Manager is a tool that allows Ross Platform Manager users to create, modify, and manage workflows in a visual interface. In the visual workflow canvas, you can visually map out flows that start and stop running Cloud targets, and take snapshots of Ross Platform targets. It can be used to:

- Start an EC2 instance.
 - Make a sequential flow. For example: Start Cloud Target A, then Start Cloud Target B.
 - Schedule flows. For example: Start Cloud Target A at 9am, then Stop Cloud Target A at 6pm.
 - Schedule a workflow where a recurring snapshot is taken of a Ross Platform target and applied to multiple Ross Platform targets.
- ★ The Visual Workflow Manager is a paid feature.

To create a visual workflow

1. Open the Ross Platform Manager, and from the top menu under Tools, select  **Visual Workflow Manager**.
2. From the toolbar, select  **Create**.

The **Create Visual Workflow** window opens.

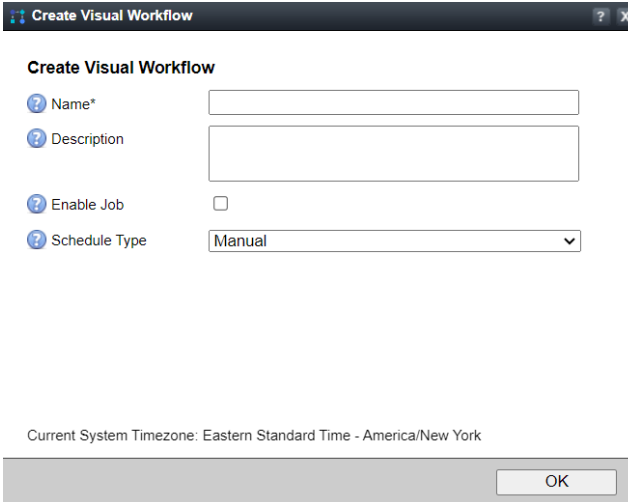

Create Visual Workflow

? Name*

? Description

? Enable Job

? Schedule Type

Current System Timezone: Eastern Standard Time - America/New York


OK

3. In the **Create Visual Workflow** window, enter the following information:
 - **Name** — Enter a meaningful name for the visual workflow.
 - **Description** — Enter a description for the visual workflow.
 - **Enable** — Check this box if you'd like to enable the visual workflow to run on a manual or recurring basis. If this box is unchecked, the visual workflow will remain disabled.
 - **Schedule Type** — Select either **Manual** or **Recurrence**.
 - Visual workflows on a **Manual** schedule run whenever a user manually instructs them to run.
 - Visual workflows on a **Recurring** schedule run according to a regular schedule, as it is set by a user.
 - **Recurrence Pattern** — Select the interval at which to set a recurring time for the visual workflow to run.
 - **Recurs Every** — Enter the specific amount of time to elapse between each recurrence of a run of the visual workflow.

Note: You can edit these settings at any point by selecting **Settings** within the **Visual Workflow Tool**.
4. Select **OK**.

The new Visual Workflow is added to the **Visual Workflow Manager**.
5. Double click on the newly added Visual Workflow in the **Visual Workflow Manager**.


The **Visual Workflow Tool** opens.

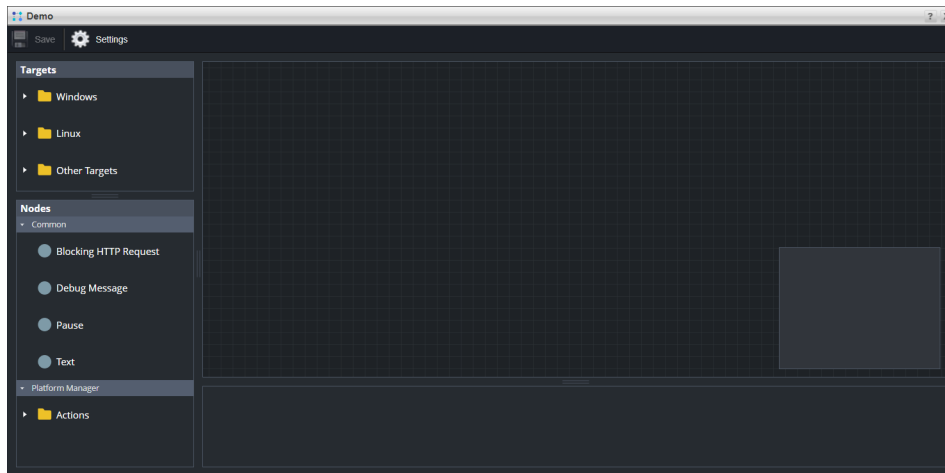


6. Drag and drop **nodes** from the sidebar on the left into the visual workflow canvas. You can add as many nodes as you'd like to create a custom workflow.

Note: Alternatively, you can select a Target from the **Targets** section of the sidebar on the left and the Nodes will be filtered to display only the options supported by the selected Target. Adding Nodes this way also automatically sets the Target for the Node.

7. When you add an **Action** node, select the name of the target that you'd like to start, stop, take or apply a snapshot of from the **Targets** section of the sidebar on the left. Note that a green icon beside a Target indicates that it is in a **Ready State**.

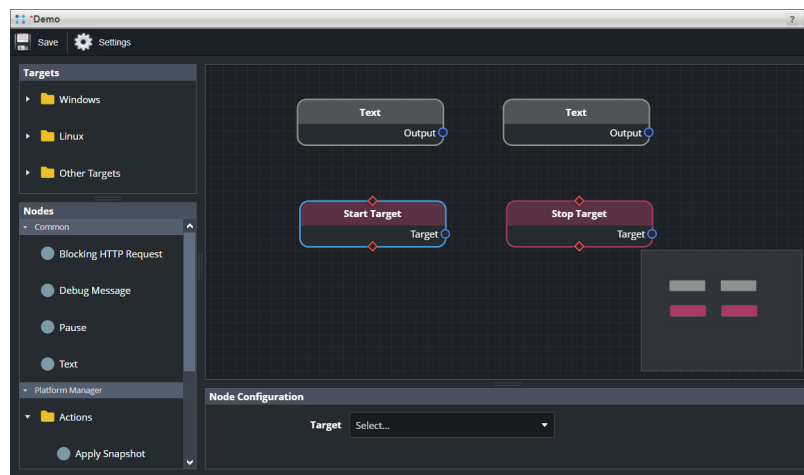



8. To connect two nodes together to make a sequential workflow, click and drag the red circle on the bottom of the first node to connect it to the red circle on the top of the second node.

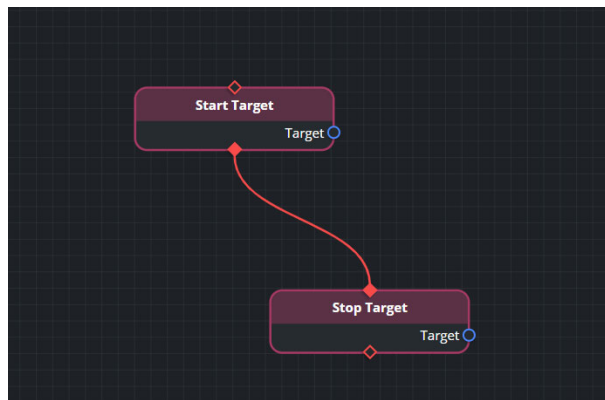


- To connect one node's output to another node's input, drag the blue circle from the right side of the first node to the blue circle on the left side of the second node.

In the below example, a snapshot taken by the Take Snapshot node is sent to three Apply Snapshot nodes.

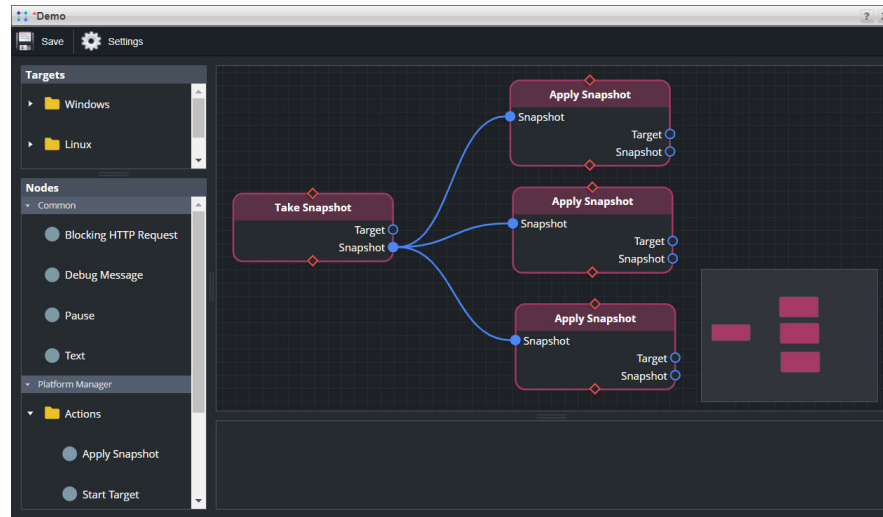

- To delete a node, select it and press the Backspace key.
- When you've completed your visual workflow, click **Save**.
- Your visual workflows will be saved in the **Visual Workflow Manager**. If you opted for a manual workflow, you can run the workflow at any point by selecting a saved workflow from the list so that it is highlighted in yellow, and clicking  **Run**.

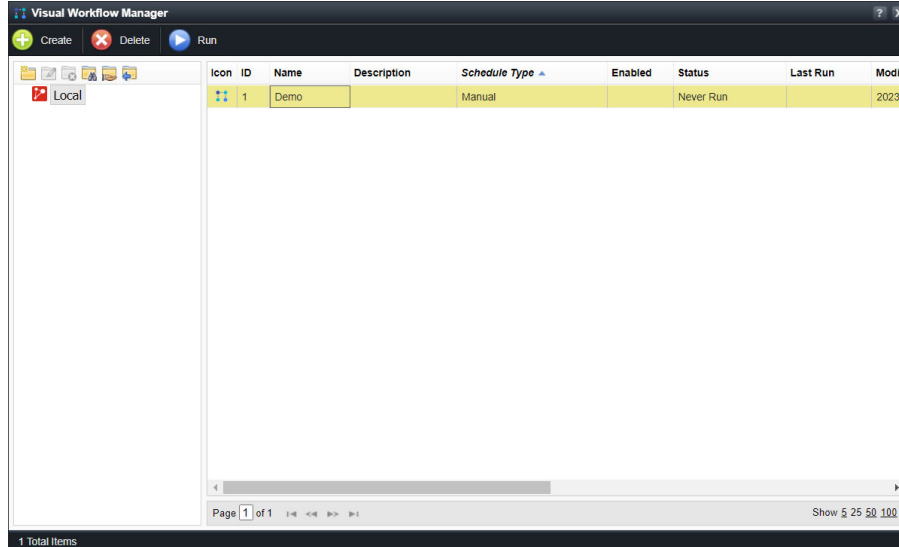

Managing a Deployment

The Ross Platform Manager allows you to manage multiple deployments and orchestrate a workflow for the Ross products XPression and softGear. This workflow allows you to upload the product into the release manager. Once that product is selected in the deployment manager, the release versions available for it are automatically populated. After a release is chosen, you can choose which targets, or target destinations, you want to deploy all the components of the product to. Once a target destination is chosen, you can add additional components to include in the deployment. Components are individual applications for a product that are often specific to a release.

This chapter discusses the following topics:

- Adding a Product to the Release Manager
- Creating or Modifying a Deployment
- Executing a Deployment
- Saving and Restoring a Deployment Snapshot

Adding a Product to the Release Manager

Ross products XPression and softGear can be uploaded to Ross Platform Manager in the Release Manager. This will provide Ross Platform Manager with definitions about the product and information about how to install the product. This will enable you to orchestrate these products through the Ross Platform Manager (**Figure 8.1**).

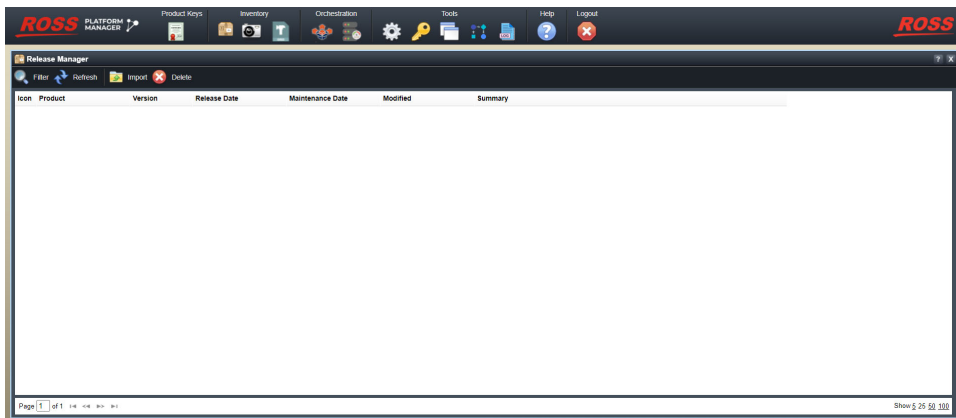




Figure 8.1 Ross Platform Manager

To upload a product to the release manager

1. Open the **Ross Platform Manager**, and from the top menu under Inventory, select the **Releases** icon. The Release Manager opens.

2. To add a product, click  **Import**.

The **Import Release** window opens.

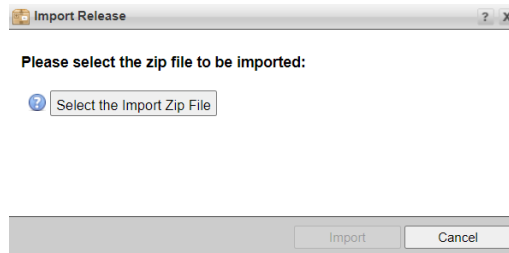

3. Click **Select the Import Zip File** to upload the zip file that corresponds to the product you are uploading.
4. Select **Import**.

The product will populate in the release manager.

Creating or Modifying a Deployment

You can create or modify a deployment to deploy products and product components. Targets and components can be selected and added in sequential order by dragging and dropping components to the appropriate area in the Deployment dialog (Figure 8.2).

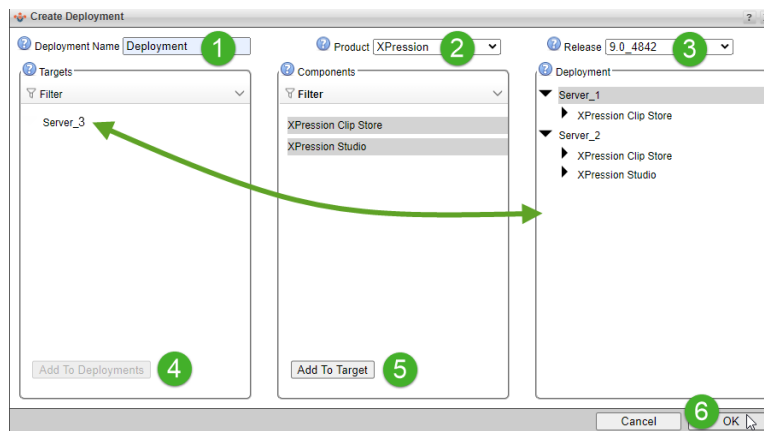



Figure 8.2 Deployment Dialog Box

To create a deployment

1. Open the Ross Platform Manager, and from the top menu under Orchestration, select the **Browse Deployments** icon.

The **Deployment Manager** opens.

2. To create a deployment, select  **Create**.

The **Create Deployment** window opens.

3. In the **Create Deployment** window, enter the following:

- **Deployment Name** — Enter a meaningful name for the deployment. E.g. Branch1_deployment
- **Product** — Select the product you wish to use for this deployment. E.g. XPression
- **Release** — Select from the list of available releases for this product. E.g. 10.0

- ★ softGear deployments must be deployed to Linux targets, and XPression deployments must be deployed to Windows targets.


4. Targets and components can be selected and added to a deployment in sequential order.
 - a. To add a component to the target, select the component, and click the **Add to Target** button or drag it into the Targets Column. For example, you could add an **XPression Clip Store** component to a target called **Server_1**.
 - b. Next, select a target and click the **Add to Deployment** button or drag it to the Deployment column. In this example, the **Server_1** target and associated components would be added to the deployment column.
5. Click **OK** to deploy the product and components to the configured target machine or VM.

To modify a deployment

1. Open the Ross Platform Manager, and from the top menu select Orchestration.

The **Deployment Manager** opens.

2. Select an existing deployment from the list.

3. From the Deployment Manager top menu select  **Modify**.

The **Modify Deployment** dialog box opens.

4. Modify the deployment as desired. Modifications include:
 - Adding or removing targets in sequential order
 - Adding or removing components in sequential order
 - Changing the release version.
5. Click **OK** to apply your changes.

Executing a Deployment

Once a deployment has been created, you can deploy the products and components to the target end point (a machine or VM).

The example (**Figure 8.3**) shows a single deployment highlighted in yellow being deployed across multiple servers when an operator clicks Deploy. The log dialogs show the targets being deployed for Server 1 and Server 2.

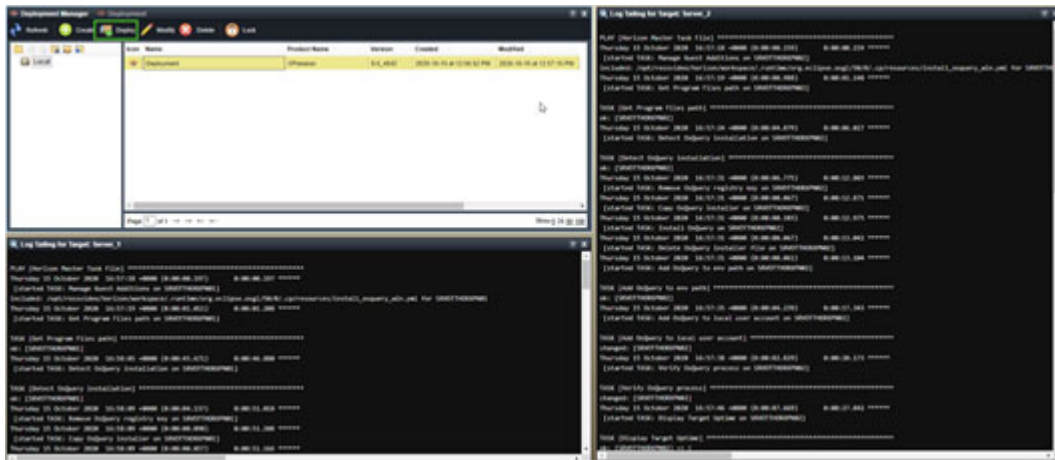



Figure 8.3 Deploying XPression on Multiple Servers

To execute a deployment

1. Open the Ross Platform Manager > Orchestration, and in the Product Deployment Manager select the desired deployment(s) from the list.
 - ★ If you have not yet configured a deployment, go back to the previous step: **“To create a deployment”** on page 8–3.
 2. Select  **Deploy**, and proceed to deploy to one or multiple deployments.
- Note:** To view your deployment, double click on it in the Deployment Manager.

Saving and Restoring a Deployment Snapshot

You can save a snapshot of a deployment as a backup or to reuse the saved configuration later (**Figure 8.4**).



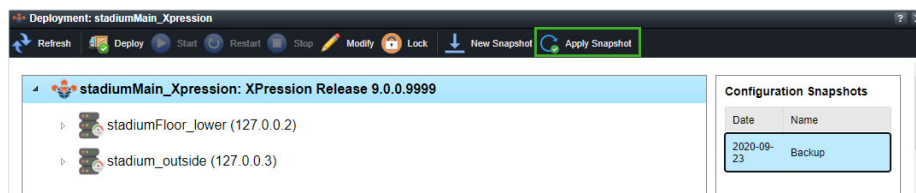


Figure 8.4 Saved Configuration

To save a snapshot of a deployment

1. Open the **Ross Platform Manager**, and from the top menu select **Deployment Manager**. Snapshots allow you to create backups of your deployment.
2. Double click the deployment that you wish to create a snapshot for.
3. In the **Deployment** window, click  **New Snapshot** to save a snapshot of the deployment in its current state.

The **Create Deployment Configuration Snapshot** dialog opens.




4. In the **Name** box, enter a name for the snapshot.
5. In the **Description** box, enter a description of the snapshot.
6. Click **OK**.
7. Confirm that the **Snapshot Manager** contains your new snapshot.


You can apply this snapshot to restore the deployment to the saved snapshot.

To restore a snapshot of a deployment

Once you have saved a snapshot of a deployment, you can restore that saved snapshot to a target.

1. From the top menu of **Ross Platform Manager**, select **Browse Configuration Snapshots**.
- ★ It is recommended that you backup your current deployment by saving a snapshot as a precaution, before over-writing it by restoring a snapshot.
2. Select a snapshot from the list by clicking on it so that it is highlighted in yellow.
3. Click  **Apply**.

The **Apply Snapshot** dialog opens.

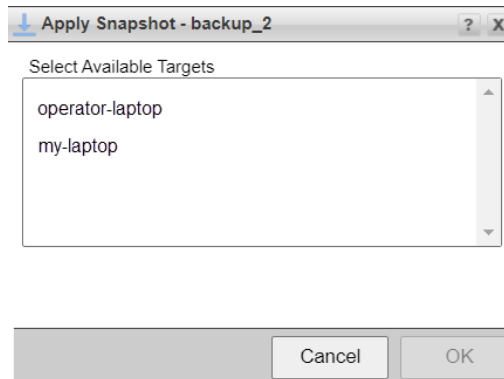

4. Select a target that you'd like to apply the snapshot to from the list of available targets. The target must be in **Ready** status in the **Target Manager** to appear on the list of available targets.

Note: The list of targets that appears will not include targets that are not compatible with your selected snapshot. For example, XPression snapshots cannot be applied to Linux targets, so Linux targets will not appear in the list of available targets.

5. Click **OK**.

To view snapshot files

You can view the list of files associated with a snapshot in the **Snapshot Viewer**.

1. From the top menu of **Ross Platform Manager**, select **Browse Configuration Snapshots**.
2. Right click on a selected snapshot, and click **View Snapshot Files**.

The **Snapshot Viewer** window appears for the selected snapshot.

Snapshot Viewer - XPression Designer (64bit) - backup_2 (L-OTTASHARMA-ash_deployment)

File Name	File Type	Created Date
FFMPEG_COPYING.LGPLV3	txt	2022-08-18 02:06:19.0
table_scene_name	txt	2022-08-18 02:06:06.0
table_item_name	txt	2022-08-18 02:05:52.0
table_content_items	txt	2022-08-18 02:05:41.0
table_content	txt	2022-08-18 02:05:29.0
table	txt	2022-08-18 02:05:18.0
header	txt	2022-08-18 02:05:07.0
...

To view snapshot history

The **Snapshot History** window will display a log of previous snapshot applications, including which snapshots were applied at which times by which users.

1. From the top menu of **Ross Platform Manager**, select **Browse Configuration Snapshots**.
2. Right click on a selected snapshot, and click **View Snapshot History**.

The **Snapshot History** window appears for the selected snapshot.

Snapshot History - XPression License Tool - reboot3snap3 (SRVOTTHORXPN03-REBOOT2)

Destination target	Date Applied	Applied By
SRVOTTHORXPN04	2022-08-19 13:26:02.182	Administrator
SRVOTTHORXPN03	2022-08-19 22:53:10.287	Administrator
SRVOTTHORXPN05	2022-08-22 19:14:19.489	Administrator
SRVOTTHORXPN05	2022-08-22 19:14:42.888	Administrator
SRVOTTHORXPN03	2022-08-22 19:15:17.786	Administrator
SRVOTTHORXPN03	2022-08-22 19:17:19.377	Administrator

Managing DashBoard CustomPanels

The Ross Platform Manager allows you to upload DashBoard CustomPanel files to the CustomPanel Manager. CustomPanel files can be stored in the CustomPanel Manager. From the CustomPanel Manager, you can open and operate CustomPanel files in a browser.

Ross Platform Manager does not currently support the following CustomPanel tags:

- `img`
- `ndi`
- `xml string`

★ The CustomPanel Manager is a paid feature.

This chapter discusses the following topics:

- CustomPanel Features Overview
- Using the CustomPanel Manager
- CustomPanel File Versioning

CustomPanel Features Overview

This section provides an outline of the CustomPanel customization features that are currently supported in Ross Platform Manager.

Tags

- Meta
- lookup
- API
- style
- color

Styling Elements

- Foreground color
- Background color
- Font
- Font size
- State-specific styling for toggle buttons and radio buttons

UI Components

- Push button
- Label
- Check box
- Radio button
- Toggle button

ogScript Functions

- Rename
- Set style
- Hide
- Reveal
- Conditional

Parameters

- Editable text box
- Read-only text box
- Label
- Drop down menu
- Parameter scripting

CustomPanel Layouts

- abs
- tabs
- simplegrid containers


Tasks


- TCP
- HTTP
- UDP
- RossTalk commands
- Debug messages

Using the CustomPanel Manager


In the CustomPanel Manager, you can upload, store, and operate CustomPanel files in Ross Platform Manager.

To upload a CustomPanel file


1. In DashBoard, save your custom panel as a .grid file.
2. Open the Ross Platform Manager, and from the top menu under Inventory, select the  **CustomPanel Manager** icon.

3. From the toolbar, select  **Upload CustomPanel**.

The **Upload CustomPanel™ File** window opens.

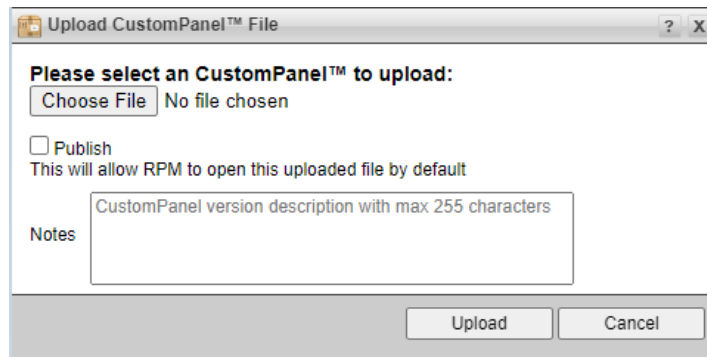

4. Select **Choose File** to upload the CustomPanel file in .grid format.
5. Your **CustomPanel** file will appear in the **CustomPanel Manager**.

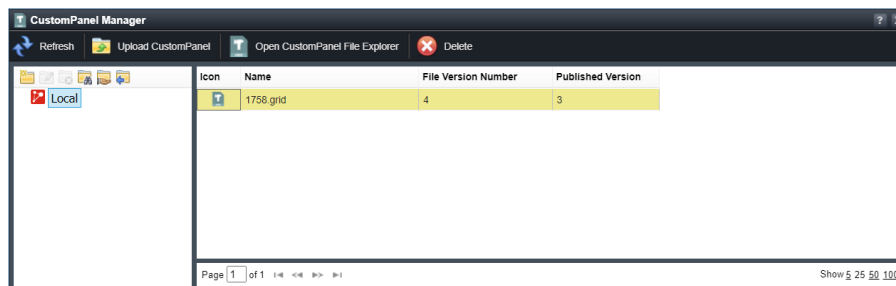

To use a CustomPanel in a browser


1. In the **CustomPanel Manager**, double click on a CustomPanel file.
The CustomPanel will open in a new browser window.
2. Operate your CustomPanel in the browser window.

CustomPanel File Versioning

You can upload and manage different versions of the same CustomPanel file in RPM. This feature enables you to maintain multiple versions of a CustomPanel file and navigate between them as required.

Publishing a CustomPanel File version signifies that it is the primary version displayed in the CustomPanel Manager. When you open the CustomPanel file from the CustomPanel Manager, the published version will open by default, as opposed to any of the other versions.


When you upload a CustomPanel file for the first time in the CustomPanel Manager, it will be automatically published. A subsequent upload of a CustomPanel file with the same name will automatically be designated as version number two.

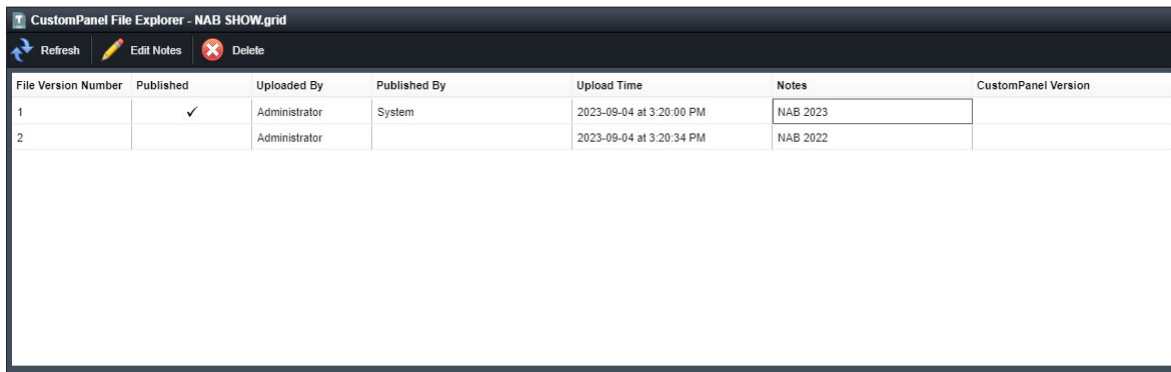

File Version Number	Published	Uploaded By	Published By	Upload Time	Notes	CustomPanel Version
1	<input checked="" type="checkbox"/>	Administrator	System	2023-09-04 at 3:20:00 PM	NAB 2023	
2	<input type="checkbox"/>	Administrator		2023-09-04 at 3:20:34 PM	NAB 2022	

To update the published version

1. Select a CustomPanel in the CustomPanel Manager by clicking on it so that it is highlighted in yellow.
2. Click on **Open CustomPanel File Explorer** from the CustomPanel Manager toolbar.
3. In the CustomPanel File Explorer, click on the **Published** column associated with the version that you would like to publish.
4. In the **Published** column, click on the check box so that it is selected.

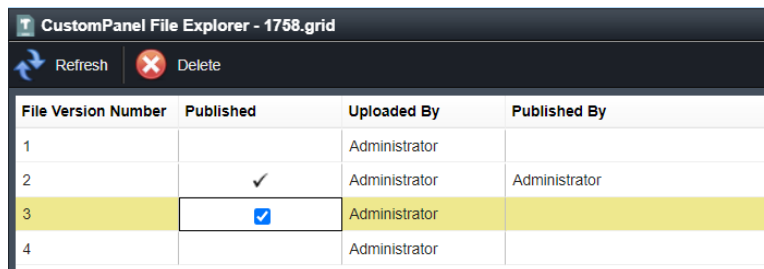

File Version Number	Published	Uploaded By	Published By
1	<input type="checkbox"/>	Administrator	
2	<input checked="" type="checkbox"/>	Administrator	Administrator
3	<input checked="" type="checkbox"/>	Administrator	
4	<input type="checkbox"/>	Administrator	

5. Refresh the CustomPanel Manager to update it with the new published version.

Deleting a version

1. Select a CustomPanel in the CustomPanel Manager by clicking on it so that it is highlighted in yellow.
 2. Click **Open CustomPanel File Explorer** from the CustomPanel Manager toolbar.
 3. In the CustomPanel File Explorer, select the version you want to delete by clicking on it so that it is highlighted in yellow.
- ★ You cannot delete a published version or a version that is currently in use (i.e., the session is active in a browser window).
4. Click **Delete** from the CustomPanel File Explorer toolbar.

Deleting an entire CustomPanel and all associated versions

1. Select the CustomPanel file you wish to delete in the CustomPanel Manager by clicking on it so that it is highlighted in yellow.
 - ★ You cannot delete a version that is currently in use (i.e., the session is active in a browser window).
2. Click **Delete** in the CustomPanel Manager toolbar.

File Version Number Display

The File Version Number column displayed in the CustomPanel Manager will always show the latest file version number.

- For example, if you have four version of a CustomPanel file and delete the second version, the CustomPanel Manager will still show four versions in the File Version Number column upon a refresh.
- However, if you delete the fourth version of the CustomPanel file, the CustomPanel Manager will show three versions in the File Version Number column upon a refresh.
- Deleting all file versions except for the last one (e.g., deleting the first three versions of the CustomPanel file and leaving the fourth one) will still result in the File Version Number column being displayed as four.
- If you delete all file versions except for the last one, the next uploaded version will automatically be assigned the number after the last one. For example, if you delete versions one, two, three, and four, but leave version five, the next uploaded version will be assigned the number six.

Configuring User Permissions

User permissions define the actions users have permission to perform and determine which buttons, messages, and controls they see in the Ross Platform Manager user interface. In most Ross Platform Manager systems, the Ross Platform Manager administrator assigns users with the user permissions that are appropriate for their role in using Ross Platform Manager.

User permissions are role-based. Each user account has one or more user roles, such as journalist or producer. Each user role has a set of permissions. The role-based permissions model enables administrators to precisely define user permissions for each user, to ensure conformance to your organization's business processes.

A Ross Platform Manager administrator can create user accounts and roles within Ross Platform Manager, or imported them from a Lightweight Directory Access Protocol (LDAP) server. Ross Platform Manager can use a combination of created and imported user accounts and roles.

To configure user permissions, you create user roles and assign permissions to them, and then create user accounts and assign user roles to them.

User permission settings belong to the following categories, represented by tabs on the Users configuration panel:

- **Manage Users** — properties related to individual users, including role assignments.
- **Manage Roles** — properties related to user roles, including permissions associated with user roles.

This chapter discusses the following topics:

- Create a User Role
- Modify a User Role
- Delete a User Role
- Create a User Account
- Modify a User Account
- Delete a User Account
- Configure Target Permissions


Create a User Role

To create a user role


1. Use your Ross Platform Manager administrator credentials to log in to the Ross Platform Manager web page.

The default administrator login credentials are as follows:

- **Username** — root
- **Password** — password

2. On the main toolbar, click the  **Configuration** icon. If the **Configuration** icon is not visible, you are not an administrator and cannot configure the server.


The **Configuration** window opens.

3. On the **Configuration** window toolbar, click the  **Users** icon.

The **Users** panel opens.

4. Click the **Manage Roles** tab.

The **Manage Roles** tab opens.

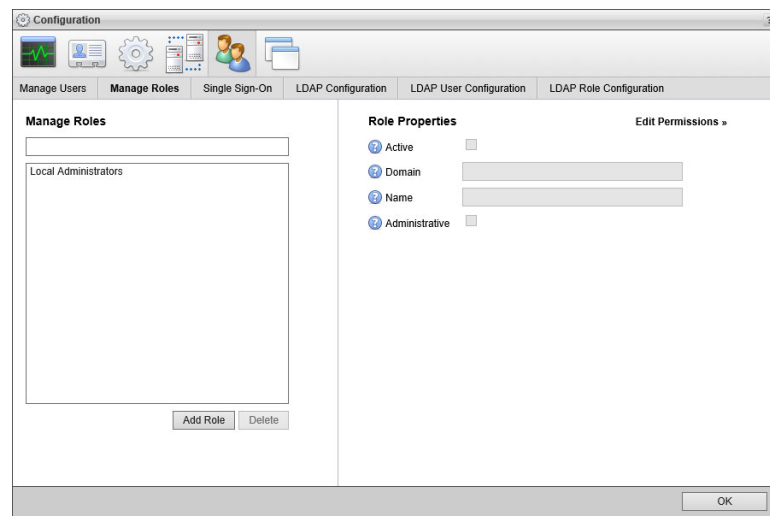

5. In the **Manage Roles** section, click **Add Role**.

Ross Platform Manager automatically saves property values set for a new user role.

6. In the **Role Properties** section, select the **Active** check box to make the role operational.

Clear this check box to deactivate a user role. Inactive roles cannot convey permissions to user accounts.

7. In the **Name** box, enter a name for the user role.

8. Select the **Administrative** check box to grant the user role all user permissions and enable the user role to configure all administrative settings.

Clear this check box to only include selected permissions with the user role.

9. Click **Edit Permissions**.

The **Role Permissions** list opens.

10. In the **Role Permissions** list, select the permissions to assign to the user role.

Keep in mind the following points as you assign permission to a user role:

- Permission assignment changes save automatically.
- Background shading delineates category headings from role permissions. To select or deselect all permissions in a category, select or clear the check box in the category heading.
- Permissions displayed in **Bold Text** are assignable to all accounts or to selected accounts:
 - › If you want to assign the permission for all accounts, select the bolded permission. This setting also applies to any accounts created in the future.
 - › If you want to assign the permission for selected accounts, clear the bolded permission and then select individual accounts from the list below the bolded permission name.
 - › If you do not want to assign the permission for any accounts, clear all accounts in the list.
- To select all permissions in the entire list, click **Select All**.

Use this option to assign all permissions to the role, or to assign most of the permissions by selecting all of them and then clearing the ones you do not want to assign.

- To clear all permissions, click **Deselect All**.

Use this option to assign only a few permissions to the role, by clearing all of them and then selecting only the ones you want to assign.

After finishing the configuration of a user role, you can assign it to a user.


For More Information on...

- user roles, refer to the sections “**Modify a User Role**” on page 10–3, and “**Delete a User Role**” on page 10–4.
- user accounts, refer to the sections “**Create a User Account**” on page 10–5, “**Modify a User Account**” on page 10–6, and “**Delete a User Account**” on page 10–7.

Modify a User Role

Within Ross Platform Manager you are only able to modify the properties of user roles created in Ross Platform Manager. To modify roles (groups) imported from an LDAP directory server, you must modify them on the LDAP directory server.

To modify a user role

1. On the **Configuration** window toolbar, click the  **Users** icon.

The **Users panel** opens.

2. Click the **Manage Roles** tab.

The **Manage Roles** tab opens.

3. In the **User Role** list, select the name of the user role to modify.

You can filter the **User Role** list by typing any of the following information in the **Filter** box above the list:

- Any part of a user role name. As you enter a user role name, the list automatically updates to only show user roles that match what you have entered.
- Enter **local** to list only the user roles created in Ross Platform Manager.
- Enter **LDAP** to list only the user roles imported from an LDAP directory.



4. In the **Role Properties** section, edit the user role properties as required.
Ross Platform Manager automatically saves property value changes made to a user role.
5. Click **Edit Permissions**.
The **Role Permissions** list opens.
6. In the **Role Permissions** list, edit the user role permission assignments as required.
Ross Platform Manager automatically saves permission assignment changes made to a user role and applies the changes to all of the users assigned to the user role.

For More Information on...


- user roles, refer to the sections “**Create a User Role**” on page 10–2, and “**Delete a User Role**” on page 10–4.
- user accounts, refer to the sections “**Create a User Account**” on page 10–5, “**Modify a User Account**” on page 10–6, and “**Delete a User Account**” on page 10–7.

Delete a User Role

You can delete user roles created in Ross Platform Manager.

★ You cannot delete user roles (groups) imported from an LDAP directory server.

To delete a user role

1. On the **Configuration** window toolbar, click the  **Users** icon.
The **Users** panel opens.
2. Click the **Manage Roles** tab.
The **Manage Roles** tab opens.
3. In the **User Role** list, select the name of the user role to delete.
4. Click **Delete**.
A confirmation message opens, asking you if you want to delete the selected user role.
5. Click **OK**.
Ross Platform Manager deletes the selected user role from the system and from assigned users. Deleting a user role from a user removes the permissions contained in the user role from the user.

For More Information on...

- user roles, refer to the sections “**Create a User Role**” on page 10–2, and “**Modify a User Role**” on page 10–3.
- user accounts, refer to the sections “**Create a User Account**” on page 10–5, “**Modify a User Account**” on page 10–6, and “**Delete a User Account**” on page 10–7.

Create a User Account


To create a user account

1. On the **Configuration** window toolbar, click the  **Users** icon.

The **Users** panel opens.

2. Click the **Manage Users** tab.

The **Manage Users** tab opens.

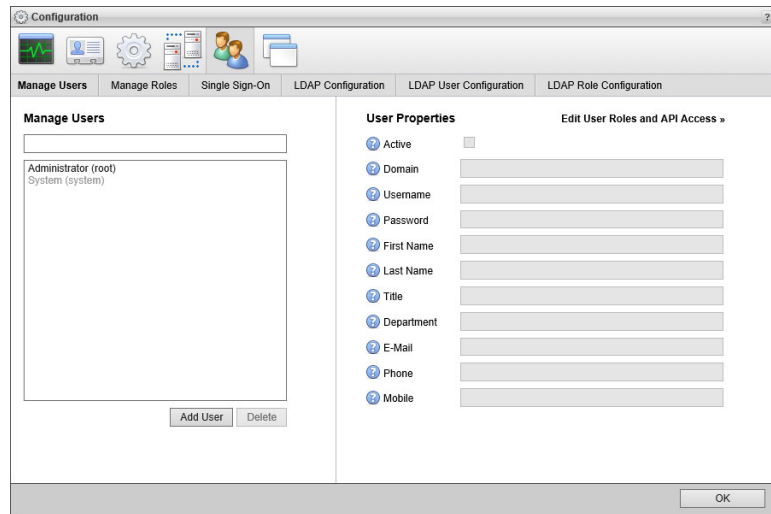

3. In the **Manage Users** section, click **Add User**.

Ross Platform Manager automatically saves property values set for a new user.

4. In the **User Properties** section, select the **Active** check box to make the user operational.

Clear this check box to deactivate a user. Ross Platform Manager retains information associated with an inactive user account, but does not allow you to use the account to log in to your Ross Platform Manager system.

5. In the **Username** box, enter a name for the user.

Use this username to log in to your Ross Platform Manager system. Usernames are case sensitive.

6. In the **Password** box, enter a password of at least five characters for the user. All user accounts must have a password.

Use this password is along with the set username to log in to your Ross Platform Manager system. Passwords are case sensitive.

7. In the **First Name** box, enter the first or proper name of the user.

8. In the **Last Name** box, enter the last or family name of the user.

After logging in to Ross Platform Manager with a username and password, the status bar displays the first and last name associated with the username.

9. In the **Title** box, enter the job title of the user within the organization.

10. In the **Department** box, enter the department to which the user belongs within the organization.

11. In the **E-Mail** box, enter the corporate e-mail address of the user.

12. In the **Phone** box, enter the corporate telephone number of the user.

13. In the **Mobile** box, enter the mobile telephone number of the user.

14. Click **Edit User Roles**.

The **User Roles** list opens.

15. In the **User Roles** list, select the check boxes associated with the user roles to assign to the user. Clear the check box associated with a user role to unassign it from the user.


For More Information on...

- user accounts, refer to the sections “**Modify a User Account**” on page 10–6, and “**Delete a User Account**” on page 10–7.
- user roles, refer to the sections “**Create a User Role**” on page 10–2, “**Modify a User Role**” on page 10–3, and “**Delete a User Role**” on page 10–4.

Modify a User Account

You can modify the properties of user accounts created in Ross Platform Manager. If you want to modify users imported from an LDAP directory server, you must change them on the LDAP directory server.

To modify a user account

1. On the **Configuration** window toolbar, click the  **Users** icon.

The **Users** panel opens.


2. Click the **Manage Users** tab.

The **Manage Users** tab opens.

3. In the **User s** list, select the name of the user to modify.

You can filter the **Users** list by typing any of the following information in the **Filter** box above the list:

- Any part of a user name. As you enter a user name, the list automatically updates to only show user names that match what you have entered.
- Enter **local** to list only the users created in Ross Platform Manager.
- Enter **LDAP** to list only the users imported from an LDAP directory.

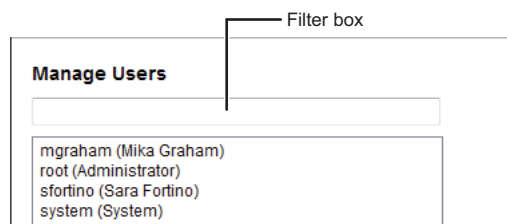

4. In the **User Properties** section, edit the user properties as required.

Ross Platform Manager automatically saves property value changes made to a user.

5. Click **Edit User Roles**.

The **User Roles** list opens.

6. In the **User Roles** list, edit the user roles assignments as required.

Ross Platform Manager automatically saves user role assignment changes made to a user.

For More Information on...


- user accounts, refer to the sections “**Create a User Account**” on page 10–5, and “**Delete a User Account**” on page 10–7.
- user roles, refer to the sections “**Create a User Role**” on page 10–2, “**Modify a User Role**” on page 10–3, and “**Delete a User Role**” on page 10–4.

Delete a User Account

You can delete user accounts created in Ross Platform Manager.

★ You cannot delete user accounts imported from an LDAP directory server.

To delete a user account

1. On the **Configuration** window toolbar, click the  **Users** icon.
The **Users** panel opens.
2. Click the **Manage Users** tab.
The **Manage Users** tab opens.
3. In the **Users** list, select the name of the user to delete.
4. Click **Delete**.
A confirmation message opens, asking you if you want to delete the selected user.
5. Click **OK**.
Ross Platform Manager deletes the selected user.
6. After completing your configuration tasks, click **OK** in the lower toolbar to close the **Configuration** panel.

For More Information on...

- user accounts, refer to the sections “**Create a User Account**” on page 10–5, and “**Modify a User Account**” on page 10–6.
- user roles, refer to the sections “**Create a User Role**” on page 10–2, “**Modify a User Role**” on page 10–3, and “**Delete a User Role**” on page 10–4.

Configure Target Permissions


Target permissions enable Ross Platform Manager users to configure specific target permissions for different user roles. These permissions can be configured from within the **Target Manager**. The three permission categories are **View**, **Execute**, and **Manage**. See below for a table that displays the capabilities of each category.


Permission Name	View Target	Update State (Cloud Target)	Add/Delete/Modify (Cloud and Static Targets)	Execute (Start and Stop Cloud Targets)	Authorize (Static Targets)
View	Yes	Yes	No	No	No
Manage	No	No	Yes	No	Yes
Execute	No	No	No	Yes	No

★ The permission framework works on the principle of Least-Privilege, meaning that the lowest level of permission will win.

Example: The Parent Folder restricts “Viewing the Target”, but the child-folder enables the user to “View” the target. In this case, by following the least privilege principle, the user will not be able to “View” the target in the child-folder.

To update target permissions

1. Open the Ross Platform Manager, and from the top menu under Orchestration, select the **Browse Targets** icon. The **Target Manager** opens.
2. From the folders tree view, select  **Modify Permissions**. The **Configuration** window opens.
3. Under **Manage Roles**, select a role to configure the permissions for.
4. Under **Role Permissions**, modify the permissions by selecting the green check mark for each permission you'd like to grant for the user.

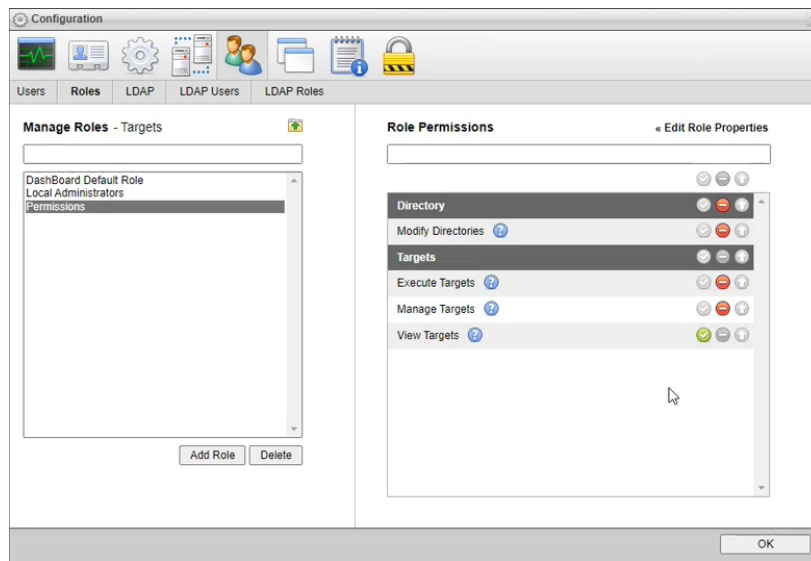

5. When the role permission selections are complete, select **OK**.

Configuring LDAP Authentication

Lightweight Directory Access Protocol (LDAP) is a protocol for accessing and maintaining distributed directory information services over a network. Ross Platform Manager can import data related to user accounts and user roles (groups) from an LDAP directory server. The **Manage Users** and **Manager Roles** tabs lists users and user roles imported from LDAP directory servers alongside user accounts and user roles created in Ross Platform Manager. You cannot alter the properties of imported user accounts and user roles.

Ross Platform Manager configuration settings related to LDAP belong to the following categories, represented by tabs on the Users configuration panel:

- **LDAP Configuration** — properties related to establishing connectivity with an LDAP directory server.
- **LDAP User Configuration** — mappings to enable Ross Platform Manager to import user accounts from the LDAP directory server.
- **LDAP Role Configuration** — mappings to enable Ross Platform Manager to import user roles (groups) from the LDAP directory server.

This chapter discusses the following topics:

- Connect to an LDAP Directory Server
- Map to LDAP User Data
- Map to LDAP Group (Role) Data

Connect to an LDAP Directory Server


Your network administrator can provide you with the settings required to connect to the LDAP directory server in your organization.

To connect to an LDAP directory server


1. Use your Ross Platform Manager administrator credentials to log in to the Ross Platform Manager web page.

The default administrator login credentials are as follows:

- **Username** — root
- **Password** — password

2. On the main toolbar, click the  **Configuration** icon. If the **Configuration** icon is not visible, you are not an administrator and cannot configure the server.


The **Configuration** window opens.

3. On the **Configuration** window toolbar, click the  **Users** icon.

The **Users** panel opens.

4. Click the **LDAP Configuration** tab.

The **LDAP Configuration** tab opens.

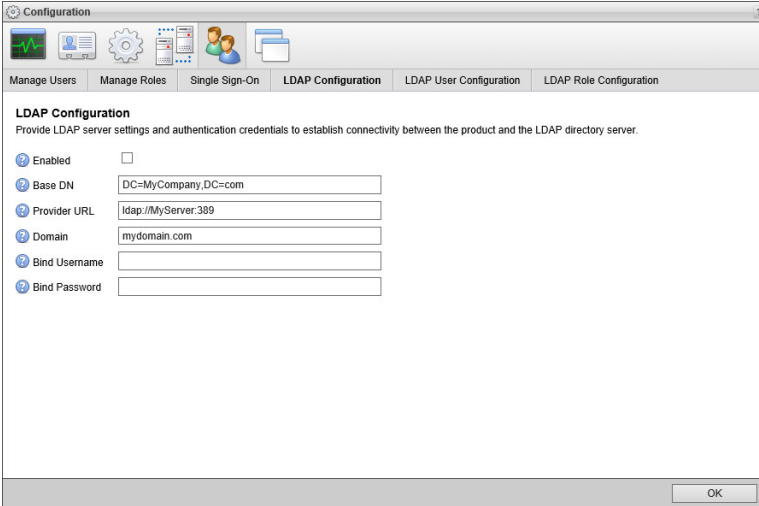

5. Select the **Enabled** box to enable LDAP user authentication.

If you clear this box, users are only able to log in to your Ross Platform Manager system with user accounts created by Ross Platform Manager.

6. In the **Base DN** box, enter the name of the root LDAP node for user data.

Example: DC=MyCompany, DC=com

7. In the **Provider URL** box, enter the URL of the LDAP provider, with optional port.

Example: ldap://MyServer:389

8. In the **Domain** box, enter the domain name to append to users upon login.

Example: rossvideo.com

9. In the **Bind Username** box, enter the distinguished name (DN) used to log in to the directory server.

10. In the **Bind Password** box, enter the password used to log in to the directory server.


For More Information on...

- how to import LDAP user account data, refer to the section “**Map to LDAP User Data**” on page 11–3
- how to Import LDAP user role data, refer to the section “**Map to LDAP Group (Role) Data**” on page 11–4

Map to LDAP User Data

You can synchronize users between an LDAP directory server and the Users table of the Ross Platform Manager Database.


To map to LDAP user data

1. On the **Configuration** window toolbar, click the  **Users** icon.

The **Users** panel opens.

2. Click the **LDAP User Configuration** tab.

The **LDAP User Configuration** tab opens.

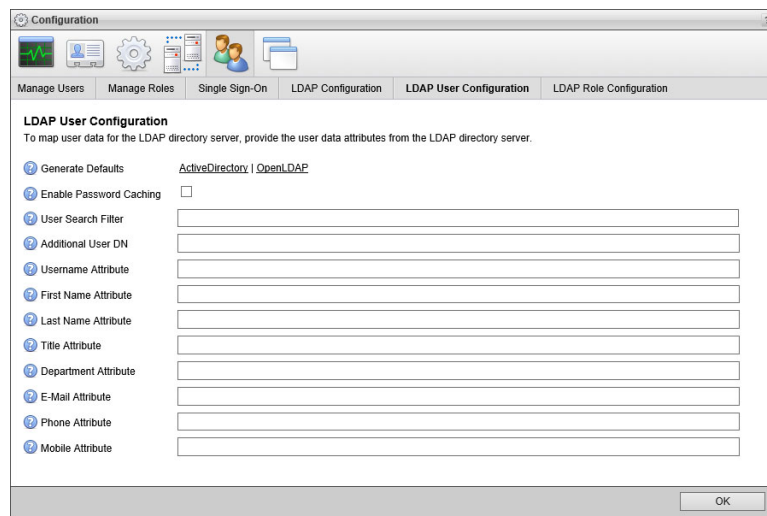

3. To populate the **LDAP User Configuration** tab with editable default values, click one of the following **Generate Defaults** links:

- **Active Directory** — your organization uses Active Directory.
- **OpenLDAP** — your organization uses an OpenLDAP directory server.

4. Select the **Enable Password Caching** check box to cache encrypted user password data on the Ross Platform Manager system and use this data for user authentication when Ross Platform Manager is unable to contact the directory server.

5. In the **User Search Filter** box, enter a valid LDAP query to define the filter that returns a list of potential Ross Platform Manager users.

During LDAP user synchronization, Ross Platform Manager only imports LDAP users who meet the criteria of the LDAP User Search filter into the Ross Platform Manager Database. During LDAP user synchronization, Ross Platform Manager deletes LDAP users imported by previous User Search filter queries from the Ross Platform Manager Database.

6. In the **Additional Group DN** box, enter the distinguished name (DN) of the user to optimize efficiency of the search defined in the **User Search Filter** box.

7. In the **Username Attribute** box, enter the attribute for the user account login on the LDAP directory server.

Example: uid or sAMAccountName

8. In the **First Name Attribute** box, enter the attribute for the user first name on the LDAP directory server.
Example: givenName
9. In the **Last Name Attribute** box, enter the attribute for the user surname on the LDAP directory server.
Example: sn
10. In the **Title Attribute** box, enter the attribute for the user organizational title on the LDAP directory server.
Example: title
11. In the **Department Attribute** box, enter the attribute for the user department on the LDAP directory server.
Example: department
12. In the **E-Mail Attribute** box, enter the attribute for the user e-mail on the LDAP directory server.
Example: mail
13. In the **Phone Attribute** box, enter the attribute for the user telephone number on the LDAP directory server.
Example: telephoneNumber
14. In the **Mobile Attribute** box, enter the attribute for the user mobile phone number on the LDAP directory server.
Example: mobile


For More Information on...


- how to connect to an LDAP directory server, refer to the section “**Connect to an LDAP Directory Server**” on page 11–2
- how to import LDAP user role data, refer to the section “**Map to LDAP Group (Role) Data**” on page 11–4

Map to LDAP Group (Role) Data

You can synchronize roles between an LDAP directory server and the Roles table of the Ross Platform Manager Database.

To map to LDAP group (role) data

1. On the **Configuration** window toolbar, click the  **Users** icon.
The **Users** panel opens.
2. Click the **LDAP Role Configuration** tab.
The **LDAP Role Configuration** tab opens.

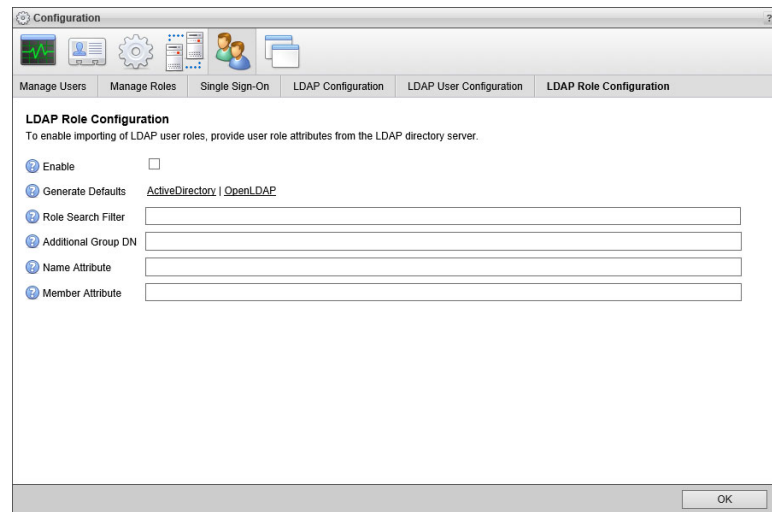

3. To populate the **LDAP Roles Configuration** tab with editable default values, click one of the following **Generate Defaults** links:

- **Active Directory** — your organization uses Active Directory.
- **OpenLDAP** — your organization uses an OpenLDAP directory server.

4. In the **Role Search Filter** box, enter a valid LDAP query to filter group (role) data to limit the list of roles available in Ross Platform Manager.

During LDAP role synchronization, Ross Platform Manager only imports LDAP roles that meet the criteria of the LDAP Role Search filter into the Ross Platform Manager Database. During LDAP role synchronization, Ross Platform Manager deactivates LDAP roles imported by previous Role Search filter queries.

5. In the **Additional Group DN** box, enter the distinguished name (DN) of the group (role) to optimize efficiency of the search defined in the **Role Search Filter** box.
6. In the **Name Attribute** box, enter the attribute for the role name on the LDAP directory server.

Example: `cn`

7. In the **Member Attribute** box, enter the user attribute that indicates group (role) membership on the LDAP directory server.

Example: `memberOf`

8. After completing your configuration tasks, click **OK** in the lower toolbar to close the **Configuration** panel.

For More Information on...

- how to connect to an LDAP directory server, refer to the section “**Connect to an LDAP Directory Server**” on page 11–2
- how to import LDAP user account data, refer to the section “**Map to LDAP User Data**” on page 11–3

Changing Your Password

Regularly changing your Ross Platform Manager account password helps ensure that someone cannot acquire your password use it to gain access to your Ross Platform Manager account and content.

- ★ You can only change the password for local Ross Platform Manager user accounts. If you use an LDAP user account to log into Ross Platform Manager, you cannot use the Change Password dialog box to change the password for your LDAP user account.

This chapter discusses the following topic:


- Change Your Ross Platform Manager Password

Change Your Ross Platform Manager Password

Your new password should be difficult to guess or crack. A good password is:

- At least eight characters long.
- Does not contain your username, real name, or company name.
- Does not contain a complete word.
- Significantly different from previous passwords.
- Contains uppercase letters, lowercase letters, numbers, and symbols.

To change your Ross Platform Manager password

1. While working in Ross Platform Manager, click or tap the  **Change Password** icon on the main toolbar.
If the **Change Password** icon is not visible, you do not have permission to change your password within Ross Platform Manager. If you need to change your password, contact your administrator.
The **Change Password** dialog box opens.
2. In the **Old Password** box, enter your current password.
3. In the **New Password** box, enter a new password.
4. In the **Verify Password** box, re-enter the new password.
5. Click or tap **Change Password**.
A message informs you of the successful change of your password.
6. Click or tap **OK**.
The next time you log in to Ross Platform Manager, use your new password.

Managing Perspectives

A user perspective is a customized view of the Ross Platform Manager user interface. It is a mapping of Ross Platform Manager panel types to positions in the user interface layout.

Perspectives are especially useful for people who perform many different tasks in Ross Platform Manager. For example, an administrator may use one perspective for configuring Ross Platform Manager, and another perspective for monitoring Ross Platform Manager. All Ross Platform Manager users can create perspectives for their own use. Ross Platform Manager administrators can also create global perspectives available to all users.

★ Panels may not always appear exactly where you expect. As you open and close panels, Ross Platform Manager adjusts the layout to optimize use of the available space.

This chapter discusses the following topics:

- Create a New Perspective
- Open a Saved Perspective
- Rename a Perspective
- Change the Layout of a Perspective
- Revert a Perspective to the Default Layout
- Make a User Perspective Global
- Delete a Perspective


Create a New Perspective

As a Ross Platform Manager user you can create a perspective for the current positions of Ross Platform Manager panels. The perspectives you create are only available to you. Ross Platform Manager administrators can make perspectives for all Ross Platform Manager system users.


To create a new perspective for your own use

1. Use your Ross Platform Manager credentials to log in to the Ross Platform Manager web page.
2. Open one of each type of panel you want to include in the new perspective.
3. Rearrange the panels to the positions you want them to occupy in the perspective.

For more information about repositioning panels, refer to section “Using a Desktop Computer with Ross Platform Manager” on page 2–3.


4. On the main toolbar, point to or tap the  **Perspectives** icon.

A list of saved perspectives opens.

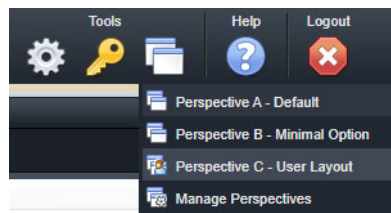


5. In the list, click or tap **Manage Perspectives**.

The **Configuration** window opens, showing the **Perspectives** tab.

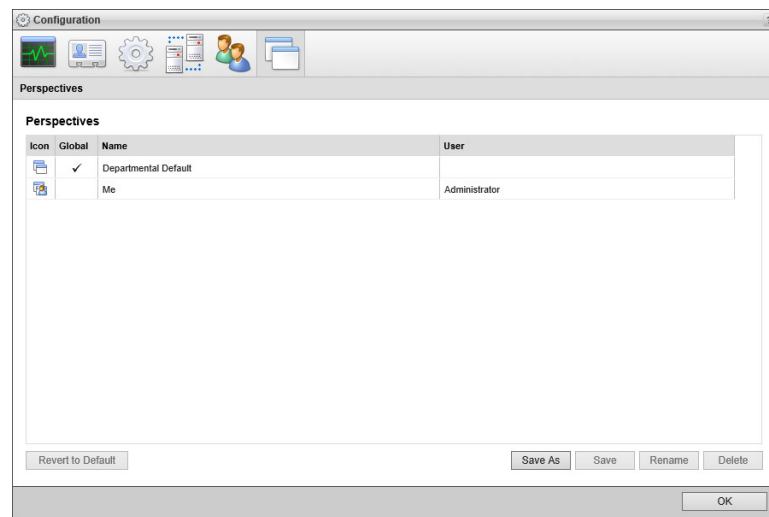

6. Click **Save As**.

The **Save Perspective As** page opens.

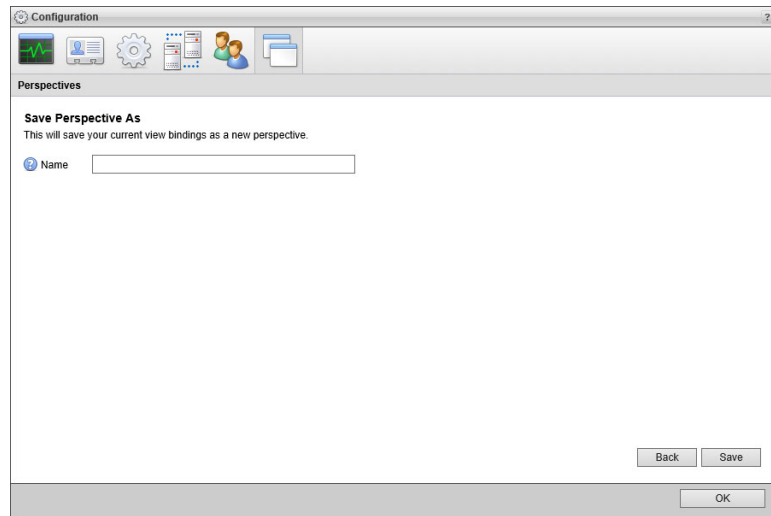


7. In the **Name** box, enter a name for the new perspective.
8. Click **Save**.

The **Save Perspective As** page closes and Ross Platform Manager adds the new perspective to the **Perspectives** list.


9. Click **OK** to close the **Configuration** window.

Open a Saved Perspective

To open a saved perspective

1. On the main toolbar, point to or tap the  **Perspectives** icon.

A list of saved perspectives opens. The last item on the list, **Manage Perspectives**, is not a perspective.

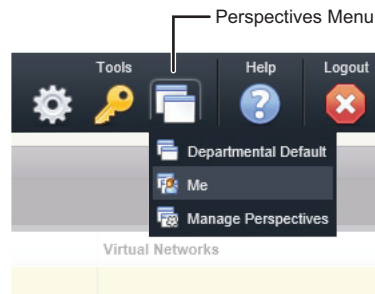


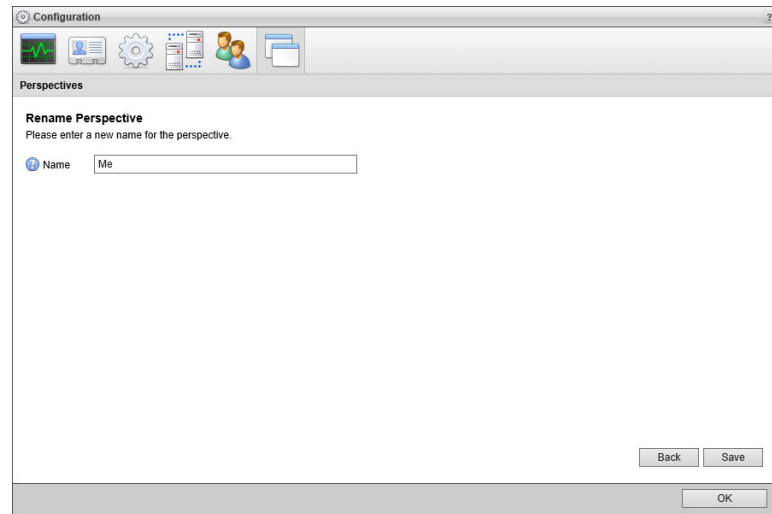
2. In the list, click or tap the perspective to open.

Ross Platform Manager repositions the open panels to conform to the layout in the selected perspective.

Rename a Perspective

To rename a perspective

1. On the main toolbar, use the  **Perspectives** icon to select **Manage Perspectives** from the list.
The **Configuration** window opens, showing the **Perspectives** tab.
2. In the **Perspectives** list, select the perspective to rename.
3. Click or tap **Rename**.
The **Rename Perspective** page opens.




4. In the **Name** box, enter a new name for the selected perspective.
5. Click or tap **Save**.
The name of the perspective updates in the **Perspectives** list.
6. Click or tap **OK** to close the **Configuration** window.

Change the Layout of a Perspective

When the layout of a perspective no longer works for your workflow, you can change the perspective layout.

To change the layout of a perspective


1. Rearrange the panels in a perspective to form the new layout for the perspective.
2. On the main toolbar, use the  **Perspectives** icon to select **Manage Perspectives** from the list.
The **Configuration** window opens, showing the **Perspectives** tab.
3. In the **Perspective** list, select the perspective to update with the new panel layout.
4. Click or tap **Save**.
A confirmation message opens, asking whether you want to overwrite the perspective.
5. In the confirmation message, click or tap **OK**.
The confirmation message closes and Ross Platform Manager saves the set panel layout is with the selected perspective.
6. Click or tap **OK** to close the **Configuration** window.

Revert a Perspective to the Default Layout

When you first use Ross Platform Manager, it opens certain types of panels in certain panel positions by default. Ross Platform Manager continues to use the default layout until you move a panel or open a saved perspective.

By default, Ross Platform Manager does not occupy all eight panel positions. Ross Platform Manager optimizes the layout by expanding open panels to fill all available space.



To revert a perspective to the default layout

1. On the main toolbar, use the  **Perspectives** icon to select **Manage Perspectives** from the list.
The **Configuration** window opens, showing the **Perspectives** tab.
2. In the **Perspective** list, select the perspective to apply the default layout.
3. Click or tap **Revert to Default**.
A confirmation message opens, asking whether you want to revert the perspective to the default layout.
★ There is no undo for this change. When you revert to the default layout Ross Platform Manager also reverts the panels to their default columns. Click or tap **Cancel** to keep the current perspective layout.
4. In the confirmation message, click or tap **OK**.
The confirmation message closes and Ross Platform Manager saves the default panel layout with the selected perspective.
5. Click **OK** to close the **Configuration** window.


Make a User Perspective Global

A user-specific perspective is only available to the Ross Platform Manager user who created it. Global perspectives are available to all Ross Platform Manager system users. If you are a Ross Platform Manager administrator, you can make a user-specific perspective global.

To make a user-specific perspective global

1. Use your Ross Platform Manager administrator credentials to log in to the Ross Platform Manager web page.
The default administrator login credentials are as follows:
 - **Username** — `root`
 - **Password** — `password`Only administrators can make a perspective available to all users.
2. On the main toolbar, use the  **Perspectives** icon to select **Manage Perspectives** from the list.
The **Configuration** window opens, showing the **Perspectives** tab.
3. In the **Perspectives** list, select the user-specific perspective to make available to all users.
Perspectives that do not have a check mark in the **Global** column of the **Perspectives** list are user-specific and only available to the users that created them. A check mark in the **Global** column of the **Perspectives** list indicates that a perspective is global and available to all users.
4. Click **Set as Global**. This option is only available to Ross Platform Manager administrators.
A check mark displays in the **Global** column of the selected perspective, which indicates that all users now have access the perspective from the  **Perspectives** icon.
5. Click **OK** to close the **Configuration** window.

To make a global perspective user-specific


1. As an administrator, use the  **Perspectives** icon to select **Manage Perspectives** from the list.
The **Configuration** window opens, showing the **Perspectives** tab.

2. In the **Perspectives** list, select the global perspective to make user-specific.
A check mark in the **Global** column of the **Perspectives** list indicates that a perspective is global and available to all users. Perspectives that do not have a check mark are user-specific.
3. Click **Set as User**. This option is only available to Ross Platform Manager administrators.
Ross Platform Manager removes the check mark from the **Global** column of the selected perspective, which indicates that only the user who created the perspective can use it.
4. Click **OK** to close the **Configuration** window.

Delete a Perspective

Ross Platform Manager users can only delete perspectives that they created. You must log in to Ross Platform Manager as an administrator to delete global perspectives.

To delete a perspective

1. On the main toolbar, use the  **Perspectives** icon to select **Manage Perspectives** from the list.
The **Configuration** window opens, showing the **Perspectives** tab.
2. In the **Perspectives** list, select the perspective to delete.
3. Click or tap **Delete**.
A confirmation message opens, asking whether you want to delete the perspective. Click or tap **Cancel** to keep the perspective.
4. In the confirmation message, click **OK**.
Ross Platform Manager deletes the selected perspective from the **Perspectives** list.
5. Click **OK** to close the **Configuration** window.

Using the Log Viewer

The Log Viewer allows users to access and extract application log data from right within the Ross Platform Manager user interface. This prevents users from needing to login to the Ross Platform Manager server to access this data, making it quicker and easier to access.


This chapter discusses the following topics:


- Downloading the Log
- Clearing the Log

Downloading the Log

Downloading the application log data from the RPM Log Viewer can be useful when troubleshooting your system. The application log data contains information about how your system is running, as well as any errors that may be occurring.

To download the log data

1. On the main toolbar, select the  **Log Viewer** icon.
The **Log Viewer** opens.

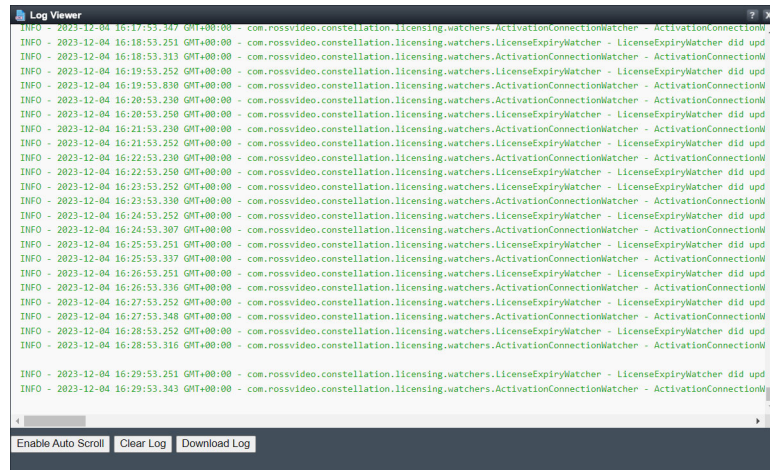


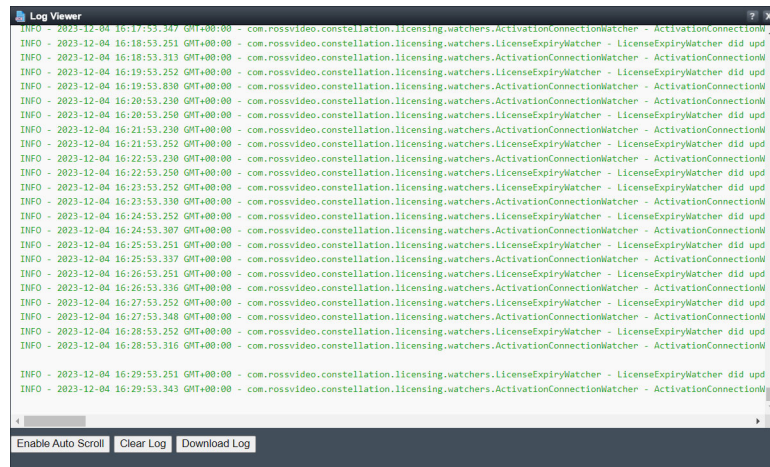
2. Select the **Download Log** button at the bottom of the **Log Viewer**.
A file containing the application log data downloads and saves to your Downloads folder.

Clearing the Log

Clearing the application log data from the RPM Log Viewer can sometimes be a step recommended during troubleshooting.

To clear the log data

1. On the main toolbar, select the  **Log Viewer** icon.
The **Log Viewer** opens.



2. Select the **Clear Log** button at the bottom of the **Log Viewer**.
The application log data is deleted and the **Log Viewer** is cleared.

