


DASHBOARD 9.13: TRANSFERRING PANASONIC AW-UE150 PRESETS TO AN AW-UE160

This document outlines the steps to transfer **Panasonic AW-UE150** presets to **AW-UE160** cameras in **DashBoard 9.13**, ensuring preset functionality is maintained during the migration process. Installation and Transfer Steps

1. Close **DashBoard** if it is running.
2. Make a backup of the DashBoard\workspace directory.
3. Install the **DashBoard 9.13** over top of the existing DashBoard installation.

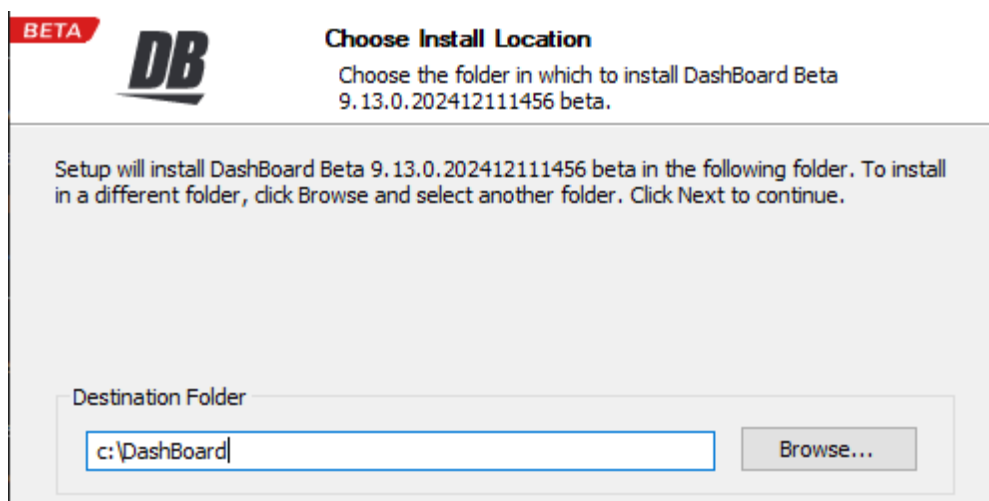

4. Run **DashBoard** and remove any **UE160 PTZ** cameras that are using the **UE150** plugin.
Important: Keep track of the IP address and port of each removed camera.
5. Close **DashBoard**.
6. In **File Explorer** open the **DashBoard** install location and navigate to:
DashBoard\workspace\metadata\plugins\com.rossvideo.camera.generic.rice\users\default
7. Find the .json files beginning with "**gccp-AWUE150**" that correspond with the **UE160 cameras** (matching the IP address and port) and change the file names to "**gccp-AWUE160**".
There will be multiple .json files to rename for each camera: **banks, config, model, setup,** and **shot**.

8. Run **DashBoard**, and readd the **UE160 PTZs** choosing the **AW-UE160** option in the **Model** dropdown.
9. Verify that each camera has its presets.
10. Remove **DashBoard backup** if there are no issues.