XPression

XPression™ GO! Mini Blackmagic® UltraStudio HD Mini Driver Installation

This document explains how to install the Blackmagic UltraStudio HD Mini driver for XPression Studio GO! Mini, BlueBox GO! Mini, and Prime GO! Mini systems.

Prerequisites

XPression GO! Mini has been qualified to work with Blackmagic driver version 10.9.7 with XPression software version 7.0 build 3806 or higher.

★ Prior to beginning installation, uninstall all previous versions of the Blackmagic driver from the Windows® Control Panel.

★ Install the Blackmagic driver prior to adding the Blackmagic Design video framebuffer into XPression.

Installation

To install the Blackmagic driver:


- Connect the UltraStudio HD Mini to the laptop with a Thunderbolt™ 3 cable.
- 2. Turn on the laptop.

The UltraStudio HD Mini box powers up with the laptop through the Thunderbolt 3 cable.

- 3. Insert the supplied driver disk into the laptop.
- 4. Run the Desktop Video Installer v10.9.7 driver installer.

To verify the driver has been installed:

1. In the Windows Control Panel, select Programs and Features.

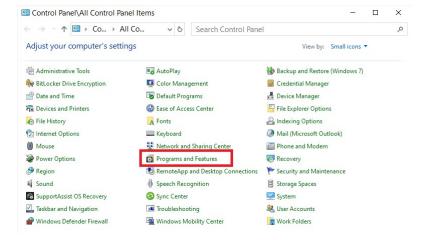



XPression

The **Programs and Features** screen opens.

2. Verify that version 10.9.7.0 of Blackmagic Design Desktop Video appears in the programs list.

