



## XPression GO! Mini Blackmagic® UltraStudio HD Mini Driver Installation

This document explains how to install the Blackmagic UltraStudio HD Mini driver for XPression Studio GO! Mini, BlueBox GO! Mini, and Prime GO! Mini systems.

### Prerequisites

XPression GO! Mini has been qualified to work with Blackmagic driver version 10.9.7 with XPression software version 7.0 build 3806 or higher.

- ★ Prior to beginning installation, uninstall all previous versions of the Blackmagic driver from the Windows® Control Panel.
- ★ Install the Blackmagic driver prior to adding the Blackmagic Design video framebuffer into XPression.

### Installation

#### To install the Blackmagic driver:


1. Connect the UltraStudio HD Mini to the laptop with a Thunderbolt™ 3 cable.
2. Turn on the laptop.

The UltraStudio HD Mini box powers up with the laptop through the Thunderbolt 3 cable.

3. Insert the supplied driver disk into the laptop.
4. Run the Desktop Video Installer v10.9.7 driver installer.

#### To verify the driver has been installed:

1. In the **Windows Control Panel**, select **Programs and Features**.

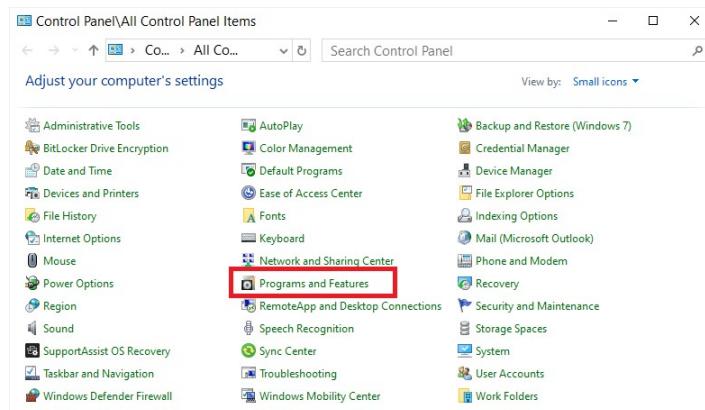

# XPression



The **Programs and Features** screen opens.

2. Verify that version **10.9.7.0** of Blackmagic Design Desktop Video appears in the programs list.

