

Rack Mounting

1 Rack Mount

Unpack and use the supplied Rack Mount Kit to mount your Horizon Server in a 19" wide by 30" deep EIA equipment rack.

*The supplied Rack Mount Kit **MUST** be used to mount your server in a 19" x 30" EIA equipment rack to avoid damaging the server.*

2 Power

Connect an **AC Power Cord** to each **AC Port** on the Horizon Server and then to Mains Power.

The server power supplies are auto-sensing and can use either 110 VAC or 220 VAC. Servers are equipped with two power supplies in a redundant configuration. Only one power supply is required to run the server.

Peripheral Cabling

3 Keyboard and Mouse

3a Plug the supplied **Keyboard** into the left **USB** port on the back of the Horizon Server.




3b Plug the supplied **Mouse** into the right **USB** port on the back of the Horizon Server.

***Note:** KVM extenders (customer supplied) are required when the server keyboard, and mouse are located remotely from the rack room.*

4 Monitor

Connect a **Monitor** (customer supplied) to the **VGA** port of the Horizon Server.

***Note:** KVM extenders (customer supplied) are required when the server monitor is located remotely from the rack room.*

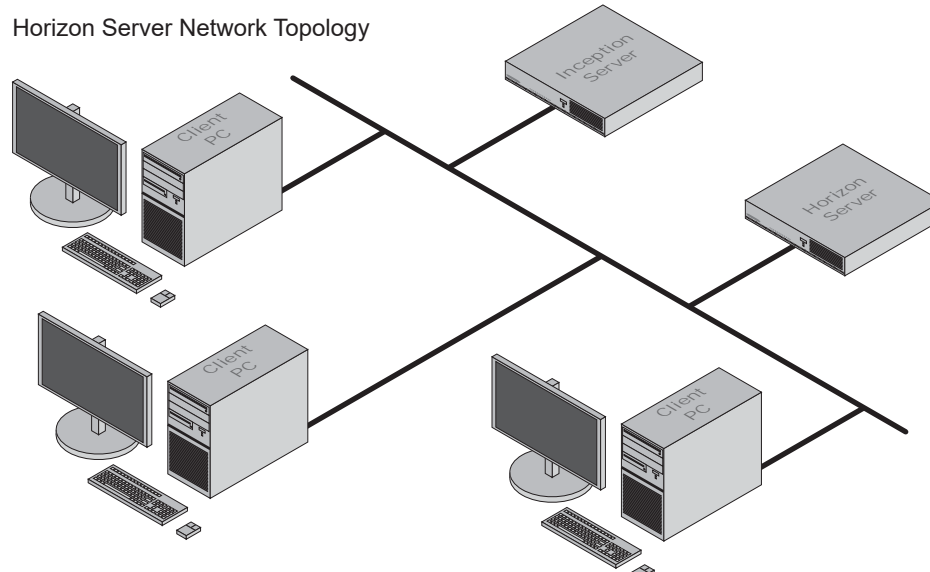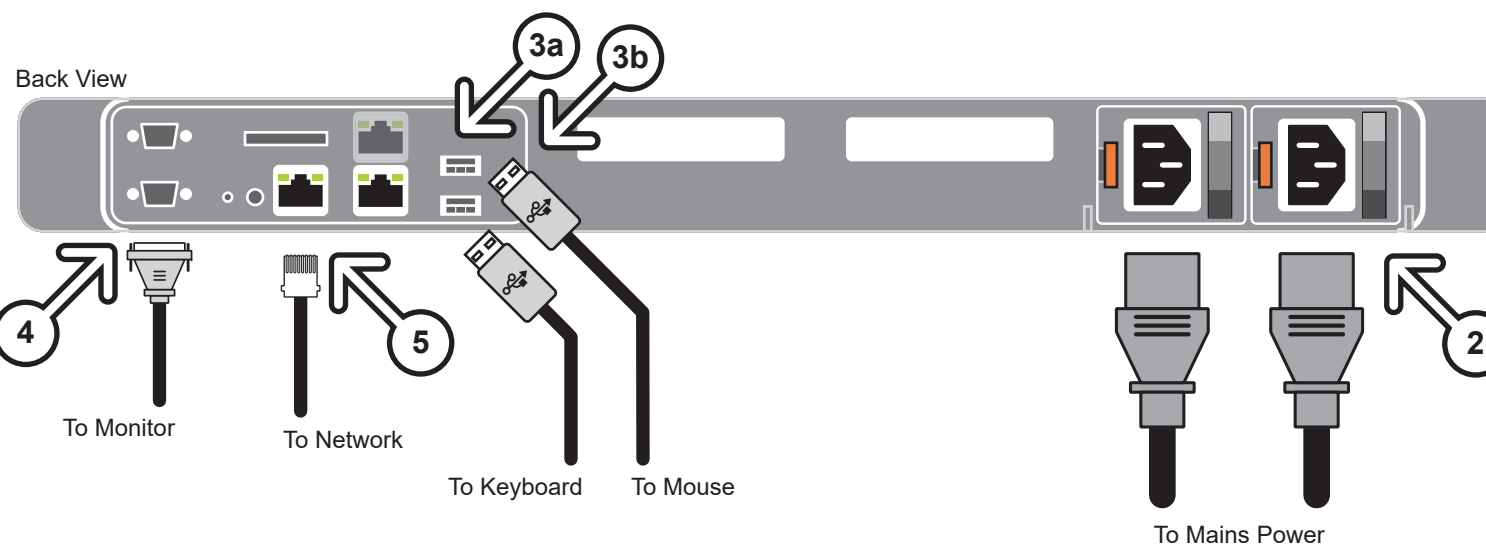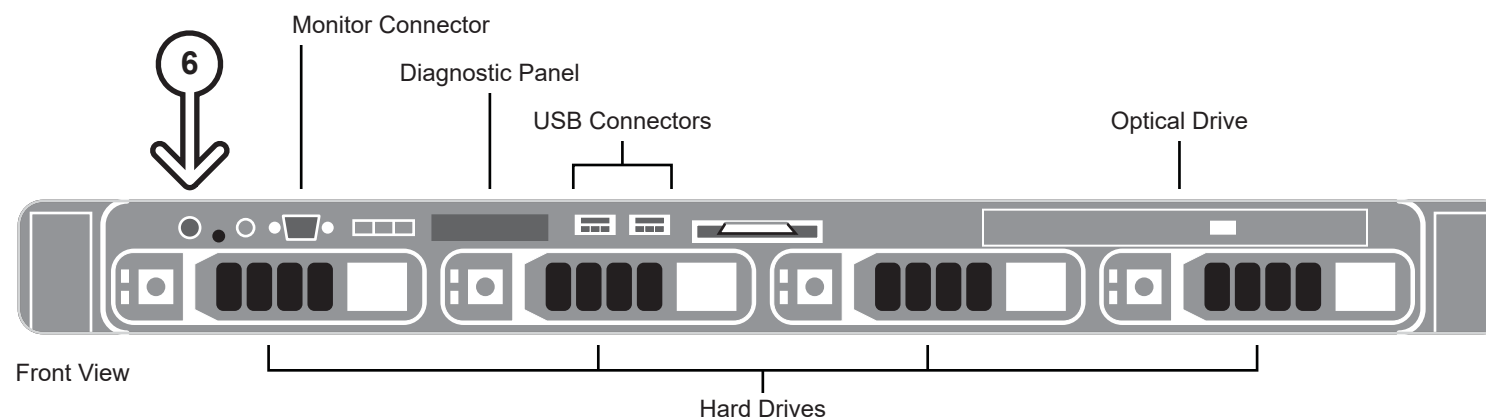

Network Cabling

5 Local Area Network

Plug an **Ethernet** cable from your Local Area Network into the **Ethernet port 1** on the back of the Horizon Server.

***Note:** The Horizon Server must be able to communicate with the Inception Servers that will connect to the Horizon Server to form a virtual network.*

Startup

6 Power Up

Press the **Power** button on the front of the Horizon Server.

***Note:** Ross Video recommends shutting down Horizon Servers only from the Windows operating system.*

7 Log On and Start Horizon

Use the following account information to log on to the Horizon Server:

User name: horizon
Password: P@ssw0rd

The Horizon Server automatically starts when the Horizon Server computer starts up.

8 Configure Horizon

To configure Horizon, open a supported web browser and use the following account information to login in:

URL: localhost
User name: root
Password: password

For security reasons, we recommend you change the default root user password.

Need Help?
Technical Support: (+1) 613 • 652 • 4886
 techsupport@rossvideo.com